



**Your experts for
safety, facility
and equipment
identification**

Product Catalog

Expert solutions

backed by more than

100 years



It takes a lot to get it right.
To be a company that lasts more than
100 years by continually evolving and growing to
meet the needs of our markets and customers. Brady has not
only survived since it was founded in 1914 — **it has thrived.**
Our first-to-the-market and best-in-the-market approach led us to
receive hundreds of patents over the years and truly shape an industry.

Simply put, **we do what others don't in ways they can't.** We offer innovative products
backed by years of research and development. Beyond our quality products and reliable
solutions, we add value for our customers through strong partnerships and a commitment
to solving important problems.

Brady offers you solutions to help increase safety, security, productivity and performance
throughout your facility — everything from printing systems, software and high-performance
labels, to facility signs, safety devices, expert safety services and more.

► **Let us show you what we have to offer**

Benchtop Printer Comparison

BradyID.com/s36

Benchtop Printer Comparison Guide

Use the following comparison guide to quickly see which benchtop printer best fits your application needs. Then turn to the following pages to find out more about the printer, compatible materials and ribbons.



**BradyPrinter S3000
Label Printer**
See page 28



**BradyPrinter S3100
Sign and Label Printer**
See page 30



**BradyPrinter i3300
Label Printer**
See page 32



**BBP®35 Multi-color
Label Printer**
See page 34

Description			
4 in. PC-connect printer for SFID. Does not offer user standalone use and accessibility or networking capability, but does have smaller footprint than BradyPrinter S3100.	4 in. standalone and PC-connect printer for SFID with Wi-Fi connectivity. Standalone use is ideal for multi-user situations and lean 5S kaizen labeling events. The ultimate in easy and accessible.	4 in. PC-connect-only printer for SFID, die-cut wire ID and product ID labels. Printer is networkable. Does not offer user standalone use but does have extra label types.	4 in. standalone and PC-connect printer for SFID with multi-color printing and fast print speed. Standalone use is ideal for multi-user situations and lean 5S kaizen labeling events. The ultimate in easy and accessible with multiple colors.
Printer Overview			
0.5 to 4 in. wide output 4 in./sec. print speed	0.5 to 4 in. wide output 3 in./sec. print speed	0.25 to 4.25 in. wide output up to 4 in./sec. print speed	0.5 – 4 in. wide output 5 in./sec. print speed
PC-connect only	Standalone and PC-connect printing	PC-connect only	Standalone and PC-connect printing
Monocolor printing (1 print color on a label)	Monocolor printing (1 print color on a label)	Monocolor printing (1 print color on a label)	Monocolor and multi-color printing
20-second material changeovers Set-up: no calibration, no sensor adjust, no label waste (prints on first label)	20-second material changeovers Set-up: no calibration, no sensor adjust, no label waste Easy user interface – just walk up and print	20-second material changeovers Set-up: no calibration, no sensor adjust, no label waste (prints on first label)	20-second material changeovers Set-up: no calibration, no sensor adjust, no label waste Easy user interface – just walk up and print
300+ parts, 14 materials (for SFID), 14 parts, 14 materials (for product ID)	300+ parts, 14 materials (for SFID) 14 parts, 14 materials (for product ID)	300+ parts, 14 materials (for SFID) 485 parts, 45 materials (for wire ID and product ID)	300+ parts, 14 materials (for SFID) 14 parts, 14 materials (for product ID)
Software: Brady Workstation	Software: Brady Workstation	Software: Brady Workstation	Software: Brady Workstation
5-year warranty	5-year warranty	5-year warranty	5-year warranty
Compatible Supplies			
B30-series materials (all)	B30-series materials (all)	B33- and B30-series materials	B30-series materials (all)
B30-series ribbons (excluding multi-color panel ribbons)	B30-series ribbons (excluding multi-color panel ribbons)	B30-series ribbons (excluding multi-color panel ribbons)	B30-series ribbons (all)
Applications			
Arc flash labels Cold-temperature labels Equipment marking Facility ID GHS and chemical labels Glow-in-the-dark labels Lean / 5S Magnetic labels Panel labels Pipe and valve marking Push button labels Reflective labels	Arc flash labels Equipment labels GHS labels Pipe markers Safety signs Warning labels Lean / 5S labels Panel and enclosure ID Tags Barcode labels	Arc flash labels Equipment labels GHS labels Pipe markers Safety signs Warning labels Lean / 5S labels Panel and enclosure ID Inside panel and automation ID Wire and cable ID Tags Barcode labels Miscellaneous die-cut labels Circuit board labels Product labels (OEM) Laboratory specimen labels	Arc flash labels (w/ red variables) Equipment labels GHS labels Pipe markers Safety signs (multi-color) Warning labels (multi-color) Lean / 5S labels Panel and enclosure ID Tags Multi-color labels

Benchtop Printer Comparison

BradyID.com/s36



**BBP®37 Multi-color
and Cut Label Printer**

See page 34



**BBP®85
Label Printer**

See page 76



**BradyJet J2000
Color Label Printer**

See page 84



**BradyJet J5000
Color Label Printer**

See page 86

Positioning

4 in. standalone and PC-connect printer for SFID with multi-color printing, shape-cutting capabilities (BBP37 only) and fast print speed. Standalone use is ideal for multi-user situations and lean 5S kaizen labeling events. The ultimate in easy and accessible with multiple colors, and letter- and shape-cutting options.

10 in. standalone and PC-connect printer for SFID with multi-color printing. Particularly popular for any large labeling needs. Ideal for large signs, large GHS labels and large equipment placards. The ultimate in easy and accessible with multiple colors for larger output.

Full-color, high-resolution ink jet printer for creating photo-quality labels in a single pass, while reducing material waste and needed inventory of labeling supplies. Significantly smaller footprint than BradyJet J5000.

8 in. PC-connect printer with high-resolution, high-speed color label printing. Ideal for creating full-color labels with images, logos, illustrations, barcodes and more. The ultimate in high-resolution printing in all colors.

Printer Overview

0.5 to 4 in. wide output 5 in./sec. print speed	4 to 10 in. wide output 1 in./sec. print speed	0.75 to 4 in. wide output Up to 2.5 in./sec. print speed	2 to 8 in. wide output Up to 6 in./sec. print speed
Standalone and PC-connect printing	Standalone and PC-connect printing	PC-connect only	PC-connect only
Monocolor and multi-color printing X-Y plotter cutter to cut out text and shapes	Monocolor and multi-color printing	Full-color printing	Full-color printing
20-second material changeovers Set-up: no calibration, no sensor adjust, no label waste Easy user interface – just walk up and print	40-second material changeovers Set-up: no calibration, no sensor adjust, no label waste Easy user interface – just walk up and print	20-second material changeovers and 10-second ink cartridge changeovers Set-up: self-fed materials	20-second material changeovers and 10-second ink cartridge changeovers Set-up: self-fed materials, no sensor adjustment
300+ parts, 14 materials (for SFID) 14 parts, 14 materials (for product ID cut-outs)	125 parts, 5 materials (for SFID)	15 parts, 3 materials (for SFID) 15 parts, 1 material (for lab ID)	18 parts, 2 materials
Software: Brady Workstation	Software: Brady Workstation	Software: Brady Workstation	Software: Brady Workstation
5-year warranty	5-year warranty	1-year warranty	1-year warranty

Compatible Supplies

B30-series materials (all)	B85-series and PowerMark materials	J20-series materials (all)	J50-series materials (all)
B30-series ribbons (all)	B85-series and PowerMark ribbons	J20-CMY ink cartridge	J50-series ink cartridges (all)

Applications

Arc flash labels (w/ red variables) Equipment labels GHS labels Pipe markers (single or multiple-up) Safety signs (multi-color) Warning labels (multi-color) Lean / 5S labels Panel and enclosure ID Tags Multi-color labels Cut-out text and shapes Circular or custom shaped labels Miscellaneous die-cut labels (cut out) Multiple-up cut-out labels Gauge labels Gradient ruler labels Product labels (cut out small batch)	Larger output Equipment labels (larger) GHS labels (larger) Safety signs (larger) Multi-color labels (larger)	GHS labels Pipe markers Warehouse marking Visual workplace labeling Lean / 5S labels Lockout Tags General ID Industrial ID Laboratory ID	Arc flash labels (w/ red variables) Equipment labels GHS labels Pipe markers Safety signs and warning labels (multi-color) Lean / 5S labels Multi-color labels Lock labels (w/ photos) Asset management Department signage Finished goods
--	--	---	--

BradyPrinter S3000 Sign and Label Printer

BradyID.com/s36

Benchtop Printers

S3000



BRADY360
5 YEAR
WARRANTY

Learn more at
BradyID.com/s3000

BradyPrinter S3000 SIGN & LABEL PRINTER

High-Performance, Entry-Level Industrial Printing

Turn busy work into smarter work. Get state-of-the-art printing capabilities in a compact package with the BradyPrinter S3000 Sign and Label Printer.


- Get lightning-fast setup times with print smart technology that auto-calibrates print settings when you load materials so you can print on the first label
- Easily make any adjustments you need to on the large color touchscreen
- Changing materials is made easy with drop-in fool-proof loading so changeovers take as few as 20 seconds
- Versatility with more than 330 parts and 26 materials options, including ToughStripe® Floor Marking Tape
- Move through your print jobs fast with print queue capabilities that automatically prints the next batch after the first one is finished
- Create labels with ease when you add Brady Workstation Label Creation Software apps and suites

Printer at-a-glance

- Small footprint
- PC-connect printer
- Single color printing
- Safety and facility ID labels only
- 330 parts, 26 materials

Printing supplies

B30-series label rolls page 36
B30-series print ribbons page 74

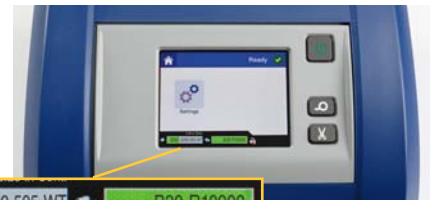

Supply status is conveniently
displayed on screen

Catalog #	Description
S3000	BradyPrinter S3000 Sign and Label Printer
B31-WIPER	Extra media wipers (5 per pack)
PCK-6	Cleaning swabs that are pre-soaked in IPA (50 per pack)

* Printer includes power cord, Quick Start Guide, USB cable, cleaning kit and cutter cleaning tool.

High-performance safety and facility labels



Pipe marking



GHS labeling



Safety tags



Lean / 5S labeling



Safety signs



Equipment and panel
labeling

BradyPrinter S3000 Sign and Label Printer

BradyID.com/s36

Printer specifications

Overview	4 in. PC-connect printer for SFID. Does not offer user standalone use and accessibility or networking capability, but does have smaller footprint than BradyPrinter S3100.
Applications	Arc flash labels, cold-temperature labels, equipment marking, facility ID, GHS and chemical labels, glow in the dark labels, lean / 5S, magnetic labels, panel labels, pipe and valve marking, push button labels, reflective labels
Label materials	Extremely aggressive 8-10 year outdoor vinyl with high tack and chemical resistance, plus wash-down material, 10-hr glow in the dark, reflective, magnetic, tags, engraved plate substitute and more.
Label formats	Continuous tapes, pre-printed and blank die-cut labels
Print technology	Thermal transfer
Print resolution	300 dpi
Print speed	4 in./sec.
Media widths	0.5 to 4 in.
Min. label dimension	0.5 in.
Color printing capabilities	Monocolor printing (some pre-printed multi-color supplies also available)
Auto cut-off	Yes
X-Y plotter cutting (cut-out shapes / text)	No
PC-connect or standalone operation	PC-connect only
Connectivity options	USB
Compatible software	Brady Workstation Apps
Compatible materials	B30 series (all)
Compatible ribbons	B30 series (excluding multi-color panel ribbons)
Calibration required	No (no waste)
Label creation and set-up	Automatic (printer or PC software reads data on chip and automatically sets up label size, color, fonts, etc.)
Ribbon and label roll installation	Labels: Supplied in cartridge, drops into place, 15-second changeover Ribbon: Supplied in cartridge, snaps into place, 5-second changeover
Warranty	5 years

U.S. Patent No. #6364552, #5823689, #6570602, #8539868



Brady Workstation Safety and Facility ID Suite

Brady Workstation has revolutionized how you design and print labels from your PC. When paired with the high-performance printing capabilities of a Brady printer, you get intuitive label set up for simple, efficient and flexible label creation.

This suite features:

- A collection of applications for creating the custom signs, labels and pipe markers you need to add visual safety guidance to your facility
- The ability to serialize and import your data onto the labels
- Real-time information about the label material installed, enabling easy label set up
- Built-in regulations, standards, pictograms, common phrases, data importation guidance, help functions and more

▶ Learn more on page 176 or download a free trial at Workstation.BradysID.com

Brady360® 5-year Warranty

We stand behind our products and have strengthened our commitment to you with a **5-year printer warranty standard and free of charge** on our benchtop printer models.* With our team of certified tech support and repair technicians, you can rest easy knowing you have the support you need, every step of the way.



*Excludes repairs due to negligence. Excludes Wraptor™, BradyJet and portable models. For full coverage details and restrictions, visit BradyID.com/brady360

Benchtop Printers

S3000

BradyPrinter S3100 Sign and Label Printer

BradyID.com/s36

Benchtop Printers

S3100



BRADY360
5 YEAR
WARRANTY

Learn more at
BradyID.com/s3100

Printer at-a-glance

- Small footprint
- PC-connect or standalone printing
- Touchscreen label creation
- Single color printing
- Safety and facility ID labels only
- 385 parts, 14 materials

Printing supplies

B30-series label rolls page 36
B30-series print ribbons page 74

BradyPrinter S3100 SIGN & LABEL PRINTER

Walk-up-and-print for ultimate ease of use

Just walk up and print. Literally. The best choice for facility, safety and Lean / 5S labeling

- Intuitive, simple to learn, very approachable. Ideal for multi-user situations, events and centrally located print stations — simple training
- 20-second supply changeover with no waste, calibration or trial and error setup
- Standalone use or PC-Connect use all in one printer
- Automatic label setup with no calibration — the printer “reads” information from your cartridges and automatically sets up the label correctly in the printer or your Brady software



Easy to load
drop-in
supplies

Catalog #	Description
S3100W-BWSSFD	BradyPrinter S3100 Printer with Brady Workstation Safety and Facility ID Software Suite*
S3100-W	BradyPrinter S3100 Printer*
120994	Padded rolling case with handle and supplies pockets
B31-WIPER	Extra media wipers (5 per pack)
B31-CCT	Cutting Tool
PCK-6	Cleaning swabs that are pre-soaked in IPA (50 per pack)
Printer and Supplies Starter Kits. Kit contents on page 72.	
S3100W-ARC-KIT	BradyPrinter S3100 Printer w/ Arc Flash Supply Kit*
S3100W-GHS-KIT	BradyPrinter S3100 Printer w/ GHS Supply Kit*
S3100W-SAFE-KIT	BradyPrinter S3100 Printer w/ Safety Supply Kit*
S3100W-LEAN-KIT	BradyPrinter S3100 Printer w/ 5S Visual Workplace Supply Kit*
S3100W-PIPE-KIT	BradyPrinter S3100 Printer w/ Pipe ID Supply Kit*
S3100W-GEN-KIT	BradyPrinter S3100 Printer w/ General Industrial Supply Kit*

* Printer ships with power cord, USB cable, network card, drivers CD, stylus, cleaning kit, cutter cleaning tool, Quick Start Guide and documentation holder.

Just walk up and print. So simple, your whole team can use it



Pipe marking



GHS labeling



Safety tags



Lean / 5S labeling



Safety signs



Equipment and
panel labeling

BradyPrinter S3100 Sign and Label Printer

BradyID.com/s36

Benchtop Printers

S3100

Printer specifications	
Overview	4 in. standalone and PC-connect printer for SFID with Wi-Fi connectivity. Standalone use is ideal for multi-user situations and lean 5S kaizen labeling events. The ultimate in easy and accessible.
Applications	Arc flash labels, equipment labels GHS labels, pipe markers, safety signs, warning labels, lean / 5S labels, panel and enclosure ID, tags barcode labels
Label materials	Extremely aggressive 8-10 year outdoor vinyl with high tack and chemical resistance, plus wash-down material, 10-hr glow in the dark, reflective, magnetic, tags, engraved plate substitute and more.
Label formats	Continuous tapes, pre-printed and blank die-cut labels
Print technology	Thermal transfer
Print resolution	300 dpi
Print speed	3 in./sec.
Media widths	0.5 to 4 in.
Min. label dimension	0.5 in.
Color printing capabilities	Monocolor printing (some pre-printed multi-color supplies also available)
Auto cut-off	Yes
X-Y plotter cutting (cutout shapes / text)	No
PC-connect or standalone operation	Standalone and PC-connect printing
Connectivity options	Standard: USB, Ethernet Optional: Wi-Fi, Wi-Fi Direct
Compatible software	Brady Workstation Apps
Compatible materials	B30 series (all)
Compatible ribbons	B30 series (excluding multi-color panel ribbons)
Calibration required	No (no waste)
Label creation and set-up	Automatic (printer or PC software reads data on chip and automatically sets up label size, color, fonts, etc.)
Ribbon and label roll installation	Labels: Supplied in cartridge, drops into place, 15-second changeover Ribbon: Supplied in cartridge, snaps into place, 5-second changeover
Warranty	5 years

U.S. Patent No. 8,542,155; 8,648,891; 5,823,689; 6,570,602. Additional patents pending.



Brady Workstation Safety and Facility ID Suite

Brady Workstation has revolutionized how you design and print labels from your PC. When paired with the high-performance printing capabilities of a Brady printer, you get intuitive label set up for simple, efficient and flexible label creation.

This suite features:

- A collection of applications for creating the custom signs, labels and pipe markers you need to add visual safety guidance to your facility
- The ability to serialize and import your data onto the labels
- Real-time information about the label material installed, enabling easy label set up
- Built-in regulations, standards, pictograms, common phrases, data importation guidance, help functions and more

▶ Learn more on page 176 or download a free trial at Workstation.BradyID.com

Brady360® 5-year Warranty

We stand behind our products and have strengthened our commitment to you with a **5-year printer warranty standard and free of charge** on our benchtop printer models.* With our team of certified tech support and repair technicians, you can rest easy knowing you have the support you need, every step of the way.



*Excludes repairs due to negligence. Excludes Wraptor™, BradyJet and portable models. For full coverage details and restrictions, visit BradyID.com/brady360

BradyPrinter i3300 Industrial Label Printer

BradyID.com/s36

Benchtop Printers



BradyPrinter i3300 INDUSTRIAL LABEL PRINTER

No waste. More labels. Less effort.

Picture your ideal label printing scenario – the labels and ribbons snap into place, there's no calibration process, you don't have to throw away blank labels before you actually print one. Ideal is now real with the BradyPrinter i3300 Industrial Label Printer. This mid-volume industrial label printer makes your identification projects easy, fast and affordable. Enjoy a variety of time- and money-saving advantages, including:

- **No waste printing:** With print smart technology, you get auto setup and calibration without throwing out blank labels
- **Fast material changeovers:** Foolproof drop-in label rolls and ribbons snap into place for 20-second material changeovers
- **Full-facility identification:** Complete all of your identification tasks, from wires, panels and products to safety and facility labels, with one convenient and efficient tool

Learn more at
BradyID.com/i3300

Printer at-a-glance

- Small footprint
- PC-connect printing
- Single color printing
- Safety, facility, wire and product ID labels
- 300+ parts, 14 materials (for SFID)
350+ parts, 28 materials (Product and Wire ID)

Printing supplies

B30- and B33-series label rolls page 36
B30-series print ribbons page 74



Print on the first
label or sleeve
— even on the
smallest labels

Catalog #	Description
149552	BradyPrinter i3300 w/ Brady Workstation Basic Suite
150643	BradyPrinter i3300 w/ Brady Workstation Safety and Facility ID Suite
150645	BradyPrinter i3300 w/ Brady Workstation GHS App
150640	BradyPrinter i3300 w/ Brady Workstation Product and Wire ID Suite
150642	BradyPrinter i3300 w/ Brady Workstation Laboratory ID Suite
150639	BradyPrinter i3300 w/ Brady Workstation Scan and Print and Scanner
120994	Padded rolling case with handle and supplies pockets
B31-WIPER	Extra media wipers (5 per pack)
B31-CCT	Cutting Tool
PCK-6	Cleaning swabs that are pre-soaked in IPA (50 per pack)

* Printer ships with cleaning kit, cutter cleaning tool, power cord, product CD, Quick Start Guide and USB cable.

Product and wire ID in addition to safety and facility ID



Industrial labeling




Arc flash labeling



Circuit board labeling



Product ID labels



Wire and cable labels



Raised panel labels
and more

BradyPrinter i3300 Industrial Label Printer

BradyID.com/s36

Benchtop Printers

i3300

Printer specifications

Overview 4 in. PC-connect-only printer for SFID, die-cut wire ID and product ID labels. Printer is networkable. Does not offer user standalone use but does have extra label types.

Applications Arc flash labels, equipment labels, GHS labels, pipe markers, safety signs, warning labels, lean / 5S labels, panel and enclosure ID, inside panel and automation ID, wire and cable ID, tags, barcode labels, miscellaneous die-cut labels, circuit board labels, product labels (OEM, laboratory specimen labels)

Label materials Extremely aggressive 8-10 year outdoor vinyl with high tack and chemical resistance, plus, wash down material, reflective, 10-hour glow-in-the-dark, engraved plate substitute, 33 other materials

Label formats Continuous material, pre-printed and blank die-cut labels, wire labels and sleeves

Print technology Thermal transfer

Print resolution 300 dpi

Print speed up to 4 in./sec.

Media widths 0.5 to 4.25 in.

Min. label dimension 0.25 in.**

Color printing capabilities Monocolor printing (some pre-printed multi-color supplies also available)

Auto cut-off Yes

X-Y plotter cutting (cutout shapes / text) No

PC-connect or standalone operation PC-connect only

Connectivity options Standard: USB, Ethernet
Optional: Wi-Fi, Wi-Fi Direct

Compatible software Brady Workstation Apps

Compatible materials B33 series (all)
B30 series (all)

Compatible ribbons B30 series (excluding multi-color panel ribbons)

Calibration required No (no waste)

Label creation and set-up Automatic (printer or PC software reads data on chip and automatically sets up label size, color, fonts, etc.)

Ribbon and label roll installation **Labels:** Supplied in cartridge, drops into place, 15-second changeover
Ribbon: Supplied in cartridge, snaps into place, 5-second changeover

Warranty 5 years

** Performance at minimum label dimension is dependent on label text and size of print run; Users should test suitability for their application.

U.S. Patent No. 5,823,689; 6,570,602.
Additional patents pending.



Brady Workstation Product and Wire ID Suite

Brady Workstation has revolutionized how you design and print labels from your PC. When paired with the high-performance printing capabilities of a Brady printer, you get intuitive label set up for simple, efficient and flexible label creation.

This suite features:

- A collection of applications for creating product labels, wire and cable markers, panel labels and more
- The ability to serialize and import your data onto the labels
- Specialty label design apps for asset tags, terminal block and patch panel labels
- Real-time information about the label material installed, enabling easy label set up
- Apps feature built-in regulations, standards, pictograms, common phrases, data importation guidance, help functions and more

▶ Learn more on page 176 or download a free trial at Workstation.BradyID.com

Brady360® 5-year Warranty

We stand behind our products and have strengthened our commitment to you with a **5-year printer warranty standard and free of charge** on our benchtop printer models.* With our team of certified tech support and repair technicians, you can rest easy knowing you have the support you need, every step of the way.



*Excludes repairs due to negligence. Excludes Wraptor™, BradyJet and portable models. For full coverage details and restrictions, visit BradyID.com/brady360

BBP®35 and BBP®37 Label Printers

BradyID.com/s36

Benchtop Printers



BRADY360
5 YEAR
WARRANTY

Learn more at
BradyID.com/bbp37

Printer at-a-glance

- Single and multi-color printing
- Cuts out shapes and text (BBP37 only)
- PC-connect or standalone printing
- Touchscreen label creation
- 300+ parts, 14 materials (for SFID)
14 parts, 14 materials (for product ID)

Printing supplies

B30-series label rolls page 36
B30-series print ribbons page 74

BBP®35
MULTICOLOR LABEL PRINTER

BBP®37
MULTICOLOR & CUT
LABEL PRINTER

Color your way to an improved workplace

The BBP35 and BBP37 label printers give you the power to make signs and labels in the colors and shapes you need to make an impact – right when you need them.

- **Multiple print colors** – Color is more memorable, more effective and is the differentiator you need to effectively improve workplace safety and productivity
- **Shape cutting with the built-in XY plotter cutter (BBP37 only)**
Cut out shapes and text, or cut around your message to create labels that look and fit how you want them to
- **Label making made easy** – Incredibly easy and intuitive interface makes it ideal for multiple users, centralized locations and lean / 5S events
- **Automatic label setup** – Printer reads critical information from the supplies and then automatically sets up the label attributes in the printer so you can start printing immediately
- **Time saving** – 20-second changeovers with drop in ribbon and label supplies



Multi-color printing
in a single print pass



Cut-out shapes and text
with the BBP37 printer
(Requires 4 in. wide material.
Cut-out text must be 0.75 in. or larger.)

Catalog #	Description
BBP35	BBP35 Multicolor Label Printer*
BBP37	BBP37 Multicolor and Cut Label Printer*
120994	Rolling case with handle, 2 pockets for supplies
BBP35-37-WIPER	BBP35/37 Media Wiper (1 each)
B31-CCT	Cutting Tool
PCK-6	Cleaning swabs that are pre-soaked in IPA (50 per pack)
B37-BLADE	Replacement XY cutting blade for BBP37 (1 each)
76737	Transfer tape for cut-out objects (300 ft. roll)

* Printer ships with cleaning kit, cutter cleaning tool, power cord, Quick Start Guide and USB cable.

Unprecedented capabilities set the standard in safety and facility ID



Safety and industrial
signage



GHS hazcomm
labels




Safety and compliance
labels



Product ID
labels



Pipe markers



Cut-out shapes and text
with BBP37 printer

BBP35 / BBP37

BBP®35 and BBP®37 Label Printers

BradyID.com/s36

Benchtop Printers

BBP35 / BBP37

Printer specifications

Overview	4 in. standalone and PC-connect printer for SFID with multi-color printing and fast print speed. Standalone use is ideal for multi-user situations and lean 5S kaizen labeling events. The ultimate in easy and accessible with multiple colors.
Applications	Arc flash labels (w/ red variables), equipment labels, GHS labels, pipe markers, safety signs (multi-color), warning labels (multi-color), lean / 5S labels, panel and enclosure ID, tags, multi-color labels
Label materials	Extremely aggressive 8-10 year outdoor vinyl with high tack and chemical resistance, plus Toughstripe® floor tape, wash-down material, 10-hr glow in the dark, reflective, magnetic, tags, engraved plate substitute and 20 other materials.
Label formats	Continuous tapes, pre-printed and blank die-cut labels
Print technology	Thermal transfer
Print resolution	300 dpi
Print speed	5 in./sec.
Media widths	0.5 to 4 in.
Min. label dimension	0.5 in.
Color printing capabilities	Monocolor and multi-color printing
Auto cut-off	Yes
X-Y plotter cutting (cutout shapes / text)	Yes, BBP37 model only
PC-connect or standalone operation	Standalone and PC-connect printing
Connectivity options	Standalone use, Ethernet, USB
Compatible software	Brady Workstation Apps
Compatible materials	B30 series (all)
Compatible ribbons	B30 series (all)
Calibration required	No (no waste)
Label creation and set-up	Automatic (printer or PC software reads data on chip and automatically sets up label size, color, fonts, etc.)
Ribbon and label roll installation	Labels: Supplied in cartridge, drops into place, 15-second changeover Ribbon: Supplied in cartridge, snaps into place, 5-second changeover
Warranty	5 years

U.S. Patent No. 6364552 B1; 6788324; 6768502 B2; BBP37 printer: 6664995 B2; Ribbon cartridges: 6860658 B2; D480749



Brady Workstation Safety and Facility ID Suite

Brady Workstation has revolutionized how you design and print labels from your PC. When paired with the high-performance printing capabilities of a Brady printer, get intuitive label set up for simple, efficient and flexible label creation.

This suite features:

- A collection of applications for creating the custom signs, labels and pipe markers you need to add visual safety guidance to your facility
- The ability to serialize and import your data onto the labels
- Real-time information about the label material installed, enabling easy label set up
- Built-in regulations, standards, pictograms, common phrases, data importation guidance, help functions and more

▶ Learn more on page 176 or download a free trial at Workstation.BradylD.com

Brady360® 5-year Warranty

We stand behind our products and have strengthened our commitment to you with a **5-year printer warranty standard and free of charge** on our benchtop printer models.* With our team of certified tech support and repair technicians, you can rest easy knowing you have the support you need, every step of the way.



*Excludes repairs due to negligence. Excludes Wraptor™, BradyJet and portable models. For full coverage details and restrictions, visit BradyID.com/brady360

B30- and B33-Series Materials

BradyID.com/s36

B30- and B33-Series Material Supplies

Specifically designed for use with the BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.*



Benchtop Printers



No-hassle, 20-second material changeovers

Forget fumbling around with supplies that roll away or require complicated threading. These easy-to-load materials and ribbons snap into place for easy 20-second material changeovers. Switch materials frequently throughout the day? You'll save time to work on your more important tasks.

Efficient label setup with print smart technology

Your printing team – printer, labels, ribbons and software – all work together from the moment you close the printer cover. It's all in the smart chip embedded in our materials.

When the material is installed, the chip sends vital information such as size, type, color and remaining quantity right to the printer. You'll be ready to print in no time.

Smart chip auto populates:

- Label size and color
- Pre-printed headers
- Remaining material quantity

No wasting labels with auto calibration

The auto calibration that takes place as soon as material is installed, means that you'll be printing on the very first label, saving you valuable time and labels.

B30 / B33 Series

The right label from the right company

Nothing leaves Brady's doors without meeting the highest quality standards. Backed by more than 100 years of identification experience and rigorous R&D testing, Brady manufactures materials you can trust.

That strong background of material development allows us to create materials for all of your applications throughout your facility. Add the printing versatility of a Brady printer, and you get a convenient tool for facility-wide identification that offers more than 825 parts and 70 material options, and additional custom label options for a variety of applications, including:

Safety, maintenance and facility applications



Arc Flash Labels



GHS Labels



Safety Labels




Pipe Markers



Inventory ID



Tags



Raised Panel Labels



Floor Marking


Specialty applications with the BradyPrinter i3300



Product ID



Wire and cable markers



Electronics and PC boards



Laboratory labels

Cut-out shapes and text with the BBP®37 Printer



Cut-out text



Cut-out shapes



Look for the scissors icon on the following pages for 4 inch wide materials that are compatible with the BBP37 XY-plotter cutter.

(Cut-out text must be 0.75 in. or larger.)


B30- and B33-Series Materials

BradyID.com/s36

Benchtop Printers

B30 / B33 Series

Rigid sign and tag techniques:

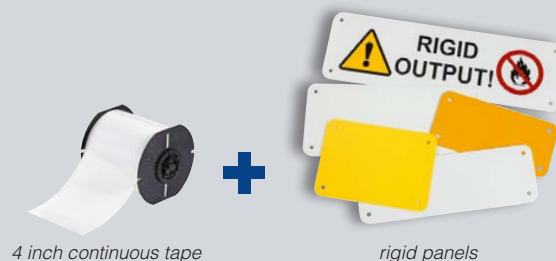

4 inch continuous tape

rigid panels

Blank Rigid Signs

- Create rigid signs and labels with any adhesive-backed output
- Ideal for surfaces where applying an adhesive label is difficult
- Panels can be mounted using foam tape, magnetic strips or by their included pre-drilled corner holes

Blank rigid signs

Color	Panel Height Inch	Panel Length Inch	Aluminum 10/Pack	Plastic 10/Pack
White	2.50	6.25	146083	146076
White	2.50	10.25	146113	146077
White	4.25	6.25	13629	13620
White	4.25	10.25	106461	146074
White	4.25	14.25	146082	146075
Yellow	2.50	6.25	146116	146080
Yellow	2.50	10.25	146117	146081
Yellow	4.25	6.25	13630	13620
Yellow	4.25	10.25	146114	146078
Yellow	4.25	14.25	146115	146079
Orange	4.25	6.25	13631	13622



White die-cut label

Blank tag

Blank Rigid Valve Tags

Print labels on your Brady printer and apply them to industrial-grade plastic tags

- Die-cut labels are sized to fit the recessed area on the tag
- Outdoor tag withstands temperatures -40° F to 180° F

Blank rigid valve tags

Catalog #	Color	Tag Size Inch	Recessed Area Inch
87696	White	2.1 x 3.6	1.5 x 3
87697	White	3.1 x 4.6	2.5 x 4
41922	Yellow	2.1 x 3.6	1.5 x 3
41923	Yellow	3.1 x 4.6	2.5 x 4
41924	Red	2.1 x 3.6	1.5 x 3
41925	Red	3.1 x 4.6	2.5 x 4
41926	Blue	2.1 x 3.6	1.5 x 3
41927	Blue	3.1 x 4.6	2.5 x 4
41928	Green	2.1 x 3.6	1.5 x 3
41929	Green	3.1 x 4.6	2.5 x 4
87694	Orange	2.1 x 3.6	1.5 x 3
87695	Orange	3.1 x 4.6	2.5 x 4
87712	Tan	2.1 x 3.6	1.5 x 3
87713	Tan	3.1 x 4.6	2.5 x 4
87710	Brown	2.1 x 3.6	1.5 x 3
87711	Brown	3.1 x 4.6	2.5 x 4
87698	Gray	2.1 x 3.6	1.5 x 3
87699	Gray	3.1 x 4.6	2.5 x 4
41920	Black	2.1 x 3.6	1.5 x 3
41921	Black	3.1 x 4.6	2.5 x 4
142133	Variety Pack*	-	-

*Pack of 30 tags includes at least one of each size and color. Perfect for evaluating which sizes and colors you need.

Printing supplies

Fits Printers	Catalog #	Color	Label Size	Labels per Roll
All*	B30-242-595-BLNKWT	White	1.125 in. x 2.75 in. for small tag	300
All*	B30-219-595-BLNKWT	White	2.25 in. x 3.75 in. for large tag	250
All*	B30-R10000	Black	Print Ribbon	-

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

BBP®37 printer “cutter” labeling techniques



4 inch
continuous
tape

Paneled
ribbon

Gauge App
on BBP37 printer

Transfer tape for
proper alignment
during application

Circle Gauge Labels with the BBP®37 Printer

The XY cutter and built-in Circle Gauge App on the BBP37 printer make it easy to create gauge labels. The app allows you to:

- Create in-zone, out-of-zone, caution zone or all three
- Specify center hole size

How to: Use multi-color ribbons, 4 in. white continuous tape and the XY cutter on the BBP37 printer to print and cut out a circular label for your gauge. Transparent transfer tape then makes it easy to cleanly apply the label in the proper position on your gauge.

Printing supplies – requires BBP37 printer

Catalog #	Color	
B30C-4000-595-WT	White vinyl	4.0 in. x 100 ft.
B30-R10000-GR-8	Green, red ribbon	
B30-R10000-KRYG-8	Black, red, yellow and green ribbon	
B30-R10000-KRGB-8	Black, red, blue and green ribbon	
76737	transfer tape	4.25 in. x 300 ft



2.25 inch
continuous tape

Gradient App
on printer

Gradient “Ruler” Labels with BBP35 or BBP37 Printers

Create accurate scale or “ruler” labels using the built-in Gradient Label App on the printer with continuous tapes.

The app allows you to:

- Specify units in inches or millimeters
- Choose from several interval tick mark options
- Designate “zones” through multiple color printing
- Set specific starting point

How to: Use any continuous tape along with the built-in Gradient Label App on the BBP35 and BBP37 printers.

Printing supplies – requires BBP35 or BBP37

Catalog #	Color	Size
B30C-4000-595-WT	White vinyl	4.0 in. x 100 ft.
B30C-2250-595-WT	White vinyl	2.25 in. x 100 ft.
B30C-1125-595-WT	White vinyl	1.125 in. x 100 ft.
B30C-500-595-WT	White vinyl	0.50 in. x 100 ft.
B30C-4000-595-YL	Yellow vinyl	4.0 in. x 100 ft.
B30C-2250-595-YL	Yellow vinyl	2.25 in. x 100 ft.
B30C-1125-595-YL	Yellow vinyl	1.125 in. x 100 ft.
B30C-500-595-YL	Yellow vinyl	0.50 in. x 100 ft.
B30-R10000	Black ribbon	
B30-R10000-RD	Red ribbon	
B30-R10000-KR-8	Black, red ribbon	
B30-R10000-KRGB-8	Black, red, green and blue ribbon	
B30-R10000-KRYG-8	Black, red, yellow and green ribbon	

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Indoor and Outdoor Vinyl (B-595)

Continuous vinyl material is ideal for lean / 5S labels, pipe markers, equipment and production area identification. These labels offer excellent resistance to oils, detergents, dirt, grime and many solvents. Permanent adhesive, very pliable, good for rough surfaces and outdoor use.

Service temp: -40° F to 180° F
Application temp: 0° F to 180° F
Average outdoor durability: 8-10 years
Agency approvals: **RoHS**




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-595-WT	B-595	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-WT	B-595	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-WT	B-595	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-595-WT	B-595	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-WT	B-595	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-YL	B-595	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-YL	B-595	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-YL	B-595	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-595-YL	B-595	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-YL	B-595	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-RD	B-595	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-RD	B-595	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-RD	B-595	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-RD	B-595	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-BL	B-595	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BL	B-595	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BL	B-595	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BL	B-595	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-GN	B-595	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-GN	B-595	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-GN	B-595	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-GN	B-595	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-OR	B-595	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-OR	B-595	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-OR	B-595	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-OR	B-595	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-BK	B-595	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BK	B-595	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BK	B-595	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BK	B-595	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-BR	B-595	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BR	B-595	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-BR	B-595	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-BR	B-595	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-OC	B-595	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-OC	B-595	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-OC	B-595	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-GD	B-595	Gold	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-GD	B-595	Gold	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-GD	B-595	Gold	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-GD	B-595	Gold	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-GY	B-595	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-GY	B-595	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-GY	B-595	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-GY	B-595	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-PL	B-595	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-PL	B-595	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-595-PL	B-595	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-595-PL	B-595	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-CL	B-595	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-CL	B-595	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-595-CL	B-595	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-595-CL	B-595	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

U.S. Patent No. 5,823,689; 6,570,602. Additional patents pending.

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Low-Halide Polyester (B-569)

Low-halide content for labeling stainless steel pipes and surfaces.
Applies best to very smooth surfaces and ideal for mounting to rigid panels.

Service temp: -40° F to 212° F
Application temp: 0° F to 212° F
Average outdoor durability: 3-5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-569-WT	B-569	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-WT	B-569	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-WT	B-569	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3000-569-WT	B-569	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-WT	B-569	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-YL	B-569	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-YL	B-569	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-YL	B-569	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-YL	B-569	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-RD	B-569	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-RD	B-569	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-RD	B-569	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-RD	B-569	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-BL	B-569	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BL	B-569	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BL	B-569	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BL	B-569	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-LB	B-569	Light Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-LB	B-569	Light Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-LB	B-569	Light Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-LB	B-569	Light Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-SB	B-569	Sky Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-SB	B-569	Sky Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-SB	B-569	Sky Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-SB	B-569	Sky Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-GN	B-569	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-GN	B-569	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-GN	B-569	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-GN	B-569	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-OR	B-569	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-OR	B-569	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-OR	B-569	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-OR	B-569	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-BK	B-569	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BK	B-569	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BK	B-569	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BK	B-569	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-BR	B-569	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-BR	B-569	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-BR	B-569	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-BR	B-569	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-OC	B-569	Ochre	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-OC	B-569	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-OC	B-569	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-OC	B-569	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-TN	B-569	Tan	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-TN	B-569	Tan	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-TN	B-569	Tan	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-TN	B-569	Tan	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-GY	B-569	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-GY	B-569	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-GY	B-569	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-GY	B-569	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-PL	B-569	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-569-PL	B-569	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-2250-569-PL	B-569	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All* ✂	Fig. 3	B30C-4000-569-PL	B-569	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-569-PK	B-569	Pink	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-PK	B-569	Pink	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-PK	B-569	Pink	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-PK	B-569	Pink	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-569-CL	B-569	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-569-CL	B-569	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-569-CL	B-569	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✂	Fig. 3	B30C-4000-569-CL	B-569	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Pre-Printed GHS / CLP Chemical Labels (B-569 and B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce two-color GHS / CLP labels in one print pass
- Three sizes of labels, each with diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor / outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling

Service temp: -4° F to 180° F
Application temp: 50° F to 180° F
Average outdoor durability: 3-5 years



Fits Printers	Catalog #	B#	Material	Legend		Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Roll	Rec. Ribbon
All*	B30-260-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-260-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-260-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.170 (55.0)	3.350 (85.0)	340	B30-R10000
All*	B30-261-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-261-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	270	B30-R10000
All*	B30-262-569-CLP4B	B-569	Polyester		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-262-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	200	B30-R10000
All*	B30-18-7569-CLP4C	B-7569	Vinyl		L4C Diamond + Text	1.000 (25.4)	3.000 (76.2)	1000	B30-R10000

Easily design GHS labels with the Brady Workstation GHS App

- Select from built-in pre-formatted label layouts with GHS symbols
- Search the built-in chemical database by CAS number to auto-populate your label, then edit to meet your specific SDS
- Print any of the six template sizes



Learn more at Workstation.BradylD.com

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Pre-Printed Right-To-Know Chemical Labels (B-595)

- Pre-printed labels result in 5-color chemical labels in a single print pass
- Indoor / outdoor grade vinyl withstands exposure to moisture, chemicals and handling

Service temp: -40° F to 180° F

Application temp: 0° F to 180° F

Average outdoor durability: 8 to 10 years

Agency approvals: **RoHS**



Fits Printers	Catalog #	B#	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon	
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-NFPA	B-595		Diamond + Text	2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-245-595-NFPA	B-595		Diamond + Text	2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-263-595-NFPA	B-595		Diamond + Text	4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-DIAM	B-595		Diamond Only	2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-161-595-DIAM	B-595		Diamond Only	4.000 (101.6)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-246-595-NFR	B-595		Diamond NFR	1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-CB	B-595		Color Bar + Text	2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-245-595-CB	B-595		Color Bar + Text	2.250 (57.5)	4.000 (101.6)	1	240	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-263-595-CB	B-595		Color Bar + Text	4.000 (101.6)	6.250 (158.8)	1	170	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-244-595-HMIG	B-595		Color Bar Only	2.250 (57.5)	2.250 (57.5)	1	365	B30-R10000
S3100, i3300, BBP31, BBP33, BBP35, BBP37	B30-246-595-HMIG	B-595		Color Bar HMIG	1.125 (28.6)	3.000 (76.2)	1	300	B30-R10000

Labels above are not compatible with BradyPrinter S3000 or BBP30 printers.

Benchtop Printers

B30 / B33 Series

B30- and B33-Series Materials

BradyID.com/s36

Pre-Printed Pre-Cut Blank Sign Headers (B-595)

- Allows printer to create multicolor signs fast in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME/ANSI Z535 standards
- Indoor / outdoor grade vinyl conforms to rough, highly textured and difficult-to-adhere-to surfaces

Service temp: -40° F to 180° F

Application temp: 0° F to 180° F

Average outdoor durability: 8-10 years

Agency approvals: **RoHS**




Figure 70




Figure 82



Blank rigid valve tags on page 38

Fits Printers	Figure	Catalog #	B#	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Roll	Rec. Ribbon
All*	Fig. 70	B30-241-595-OSHADA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-OSHADA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-OSHACA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-OSHACA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSICA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSICA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIDA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIDA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIWA	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIWA	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSINO	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSINO	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-25-595-PREC	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 70	B30-25-595-PEL	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 82	B30-242-595-BLNKWT	B-595		1.125 (28.6) **	2.750 (69.8)	300	B30-R10000
All*	Fig. 82	B30-241-595-BLNKWT	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 82	B30-219-595-BLNKWT	B-595		2.250 (57.5) **	3.750 (95.3)	250	B30-R10000
All*	Fig. 82	B30-25-595-BLNKWT	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000
All*	Fig. 82	B30-241-595-BLNKYL	B-595		2.250 (57.5)	3.000 (76.2)	300	B30-R10000
All*	Fig. 82	B30-25-595-BLNKYL	B-595		4.000 (101.6)	6.000 (152.4)	175	B30-R10000

** Sized to fit blank rigid valve tags, see page 38.

Non-Adhesive Tags (B-551)

- Non-adhesive semi-rigid card stock in pre-cut or continuous styles
- Pre-cut style tags micro-perforated between tags to separate cleanly and feature chamfered corners
- Snap-in plastic grommets available for extra strength around mounting hole (Catalog #20596, 100/bag)

Service temp: -40° F to 193° F

Average outdoor durability: Up to 2 years




Figure 3




Figure 69



Fits Printers	Figure	Catalog #	B#	Header	Tag Width A Inch (mm)	Tag Height B Inch (mm)	Tags Per Roll	Rec. Ribbon
All*	Fig. 69	B30-255-551-ANSIDA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-OSHADA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-ANSICA	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 69	B30-255-551-WHT	B-551		3.250 (82.6)	5.750 (146.1)	100	B30-R10000
All*	Fig. 3	B30C-2500-551-WT	B-551		2.500 (63.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-3250-551-WT	B-551		3.250 (82.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-4250-551-WT	B-551		4.250 (107.9)	50 ft. (15.2 m)	1 roll (cont.)	B30-R10000

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

ToughWash® Washdown Resistant Labels (B-854 and B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to allow detection in food stream

Service temp: -40° F to 230° F

Agency approvals: RoHS




Figure 3




Figure 73



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
ToughWash Metal Detectable Material (B-854):								
All*	Fig. 3	B30C-4000-854-YL	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-854-WT	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 73	B30-25-854-OSHADA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSIWA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSIDA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-ANSICA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-PEL	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-854-PREC	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
ToughWash Material (B-855):								
All*	Fig. 3	B30C-1125-855-YL	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-2250-855-YL	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-855-YL	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-1125-855-WT	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-2250-855-WT	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 3	B30C-4000-855-WT	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
All*	Fig. 73	B30-25-855-OSHADA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSIWA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSIDA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-ANSICA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-PEL	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
All*	Fig. 73	B30-25-855-PREC	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Chemical and Solvent Resistant Polypropylene Labels (B-425, B-7425)

- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

B-425: Service temp: -94° F to 212° F
B-7425: Service temp: -320° F to 248° F
Agency approvals:    




Figure 1




Figure 2




Figure 25



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-5-425	B-425	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-425	B-425	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-425	B-425	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-425	B-425	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 25	B33-88-7425	B-7425	White	1.000 (25.4)	0.750 (19.1)	2	2000	B30-R4300
i3300, BBP33	Fig. 2	B33-179-7425	B-7425	White	1.000 (25.4)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 25	B33-37-7425	B-7425	White	1.500 (38.1)	0.500 (12.7)	2	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-136-7425	B-7425	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-235-7425	B-7425	White	1.500 (38.1)	1.000 (25.4)	1	1250	B30-R4300
i3300, BBP33	Fig. 2	B33-258-7425	B-7425	White	1.500 (38.1)	1.750 (44.5)	1	900	B30-R4300
i3300, BBP33	Fig. 2	B33-53-7425	B-7425	White	2.000 (50.8)	0.500 (12.7)	1	2000	B30-R4300

Retro Reflective Tape (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labeling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service temp: -40° F to 158° F
Application temp: 0° F to 158° F (yellow and orange), 50° F to 158° F (silver)
Average outdoor durability: 4 to 6 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-584-SL	B-584	Silver	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-SL	B-584	Silver	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All* 	Fig. 3	B30C-4000-584-SL	B-584	Silver	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-584-YL	B-584	Yellow	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-YL	B-584	Yellow	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All* 	Fig. 3	B30C-4000-584-YL	B-584	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-584-OR	B-584	Orange	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-584-OR	B-584	Orange	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All* 	Fig. 3	B30C-4000-584-OR	B-584	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- Designed for directional, evacuation and equipment marking. Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- For glow-in-the-dark identification up to 10 hours
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service temp: -40° F to 140° F
Application temp: 40° F to 140° F




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-526	B-526	Luminous Green	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-526	B-526	Luminous Green	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
All* 	Fig. 3	B30C-4000-526	B-526	Luminous Green	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

 Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Printable Magnetic Supply (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for reusable, repositionable and Lean / 5S identification applications

Service temp: 0° F to 158° F
Average outdoor durability: 3 to 5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-2500-509-WT	B-509	White	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4250-509-WT	B-509	White	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2500-509-YL	B-509	Yellow	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4250-509-YL	B-509	Yellow	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000

Repositionable Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, such as Lean / 5S inventory labels

Service temp: -40° F to 180° F
Application temp: 50° F to 180° F
Average outdoor durability: 5 years




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-500-581-WT	B-581	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-581-WT	B-581	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-581-WT	B-581	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-581-WT	B-581	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-581-YL	B-581	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-581-YL	B-581	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-581-YL	B-581	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-581-YL	B-581	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

Dissolvable Paper Labels (B-403)

- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labeling glassware, temporary asset tracking, animal housing identification and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue

Service temp: -40° F to 172° F




Figure 3



Dissolves within 30 seconds leaving no residue.

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-403-WT	B-403	White	1.125 (28.575)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-2250-403-WT	B-403	White	2.250 (57.15)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-3000-403-WT	B-403	White	3.000 (76.2)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-4000-403-WT	B-403	White	4.000 (101.6)	100 (30.5)	1 (cont.)	B30-R4300

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

General ID Labels for Lean / 5S, Bins and Production Areas (B-483, B-484A, B-498, B-499 and B-595)

- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40° F to 248° F

B-484A: Service temp: -40° F to 240° F

B-498: Service temp: -40° F to 175° F

B-499: Service temp: -40° F to 193° F

B-595: Service temp: -40° F to 180° F

Agency approvals: RoHS

Agency approvals: RoHS

Agency approvals: RoHS

Agency approvals: RoHS

Agency approvals: RoHS




Figure 1




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Vinyl cloth with ggressive but repositionable adhesive (B-498):									
i3300, BBP33	Fig. 1	B33-90-498	B-498	White	0.250 (6.4)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-68-498	B-498	White	0.500 (12.7)	0.750 (19.1)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-87-498	B-498	White	0.500 (12.7)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-1-498	B-498	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-95-498	B-498	White	0.800 (20.3)	1.437 (36.5)	3	2300	B30-R6200
i3300, BBP33	Fig. 1	B33-5-498	B-498	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-88-498	B-498	White	1.000 (25.4)	0.750 (19.1)	2	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-89-498	B-498	White	1.000 (25.4)	1.437 (36.5)	3	2300	B30-R6200
S3000, S3100, i3300, BBP35, BBP37	Fig. 1	B30C-4000-498	B-498	White	4.000 (101.6)	80 ft. (24.4 m)	1 roll (cont.)		B30-R6200
Nylon Cloth with permanent adhesive (B-499):									
i3300, BBP33	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	4	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	4	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	1	1100	B30-R6000
Polyester with ultra-aggressive adhesive for highly textured and low-surface energy surfaces (B-483):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Polyester with ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
Continuous cut-to-length vinyl with permanent adhesive is conformable and indoor / outdoor grade (B-595):									
All*	Fig. 3	B30C-500-595-WT	B-595**	White	0.500 (12.7)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-1125-595-WT	B-595**	White	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-500-595-YL	B-595**	Yellow	0.500 (12.7)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000
All*	Fig. 3	B30C-1125-595-YL	B-595**	Yellow	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R10000

** Additional sizes and colors available for B-595 on page 40.

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Cold Temperature Application Material (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -10° F and lasts in -40° F
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use

Service temp: -40° F to 212° F

Average outdoor durability: Up to 1 year




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-549-WT	B-549	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-549-WT	B-549	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-549-WT	B-549	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-549-YL	B-549	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-2250-549-YL	B-549	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
All* ✕	Fig. 3	B30C-4000-549-YL	B-549	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

ToughStripe® Printable Floor Marking Tape (B-483 with overlamine)

- Revolutionary B-483 material has ultra-aggressive adhesive
- Each roll ships with a roll of clear overlamine which must be applied over printed label for best performance

Service temp: -40° F to 248° F

Agency approvals:




Figure 3



For use with printer*	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483WT-KT	B-483	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483WT-KT	B-483	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-3000-483WT-KT	B-483	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483WT-KT	B-483	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483YL-KT	B-483	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483YL-KT	B-483	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-3000-483YL-KT	B-483	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483YL-KT	B-483	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483RD-KT	B-483	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483RD-KT	B-483	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483RD-KT	B-483	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483BL-KT	B-483	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483BL-KT	B-483	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483BL-KT	B-483	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483GN-KT	B-483	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483GN-KT	B-483	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483GN-KT	B-483	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483BK-KT	B-483	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483BK-KT	B-483	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483BK-KT	B-483	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-1125-483OR-KT	B-483	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-2250-483OR-KT	B-483	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✕	Fig. 3	B30C-4000-483OR-KT	B-483	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000

ToughStripe material is not compatible with BBP®30, BBP®33 and BBP®31 printers.

ToughStripe material also available as:

- Solid, striped and dashed tape
- Die-cut shape, numbers and letters

View page 295 for more additional products.



✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Raised Profile - Engraved Plate Substitute Labels (B-593)

Push Button Style

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates – costs up to 80% less
- 10-year outdoor durability rating
- On-demand labeling: prints out in fewer than 4 seconds
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole diameters)

Service temp: -4° F to 212° F
Application temp: 50° F to 212° F
Agency approvals:   




Figure 18a




Figure 18b
(without key hole)



Fits Printers	Figure	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Hole Diameter C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 18a	B30EP-167-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18b	B30EP-167U-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18a	B30EP-169-593-WT	B-593	White	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R6000
All*	Fig. 18a	B30EP-168-593-WT	B-593	White	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R6000
All*	Fig. 18a	B30EP-170-593-WT	B-593	White	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R6000
All*	Fig. 18a	B30EP-167-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18b	B30EP-167U-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18a	B30EP-169-593-YL	B-593	Yellow	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R6000
All*	Fig. 18a	B30EP-168-593-YL	B-593	Yellow	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R6000
All*	Fig. 18a	B30EP-170-593-YL	B-593	Yellow	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R6000
All*	Fig. 18a	B30EP-167-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-BK	B-593	Black	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-BK	B-593	Black	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-BK	B-593	Black	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT
All*	Fig. 18a	B30EP-167-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-GN	B-593	Green	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-GN	B-593	Green	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-GN	B-593	Green	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT
All*	Fig. 18a	B30EP-167-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-RD	B-593	Red	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-RD	B-593	Red	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-RD	B-593	Red	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT

U.S. Patent No. US8475914B2; US9005729B2.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Raised Profile - Engraved Plate Substitute Labels (B-593)

Rectangular Style

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates – costs up to 80% less
- 10-year outdoor durability rating
- On-demand labeling: prints out in fewer than 4 seconds
- Ideal for inside-panel backer board labels and front-of-enclosure labeling

Service temp: -4° F to 212° F
Application temp: 50° F to 212° F
Agency approvals:




Figure 18c



Fits Printers	Figure	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 18c	B30EP-171-593-WT	B-593	White	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-WT	B-593	White	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-175-593-WT	B-593	White	0.750 (19.1)	3.000 (76.2)	1	375	B30-R6000
All*	Fig. 18c	B30EP-173-593-WT	B-593	White	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-WT	B-593	White	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000
All*	Fig. 18c	B30EP-176-593-WT	B-593	White	1.000 (25.4)	3.000 (76.2)	1	300	B30-R6000
All*	Fig. 18c	B30EP-177-593-WT	B-593	White	2.500 (63.5)	3.000 (76.2)	1	125	B30-R6000
All*	Fig. 18c	B30EP-171-593-YL	B-593	Yellow	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-YL	B-593	Yellow	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-175-593-YL	B-593	Yellow	0.750 (19.1)	3.000 (76.2)	1	375	B30-R6000
All*	Fig. 18c	B30EP-173-593-YL	B-593	Yellow	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-YL	B-593	Yellow	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000
All*	Fig. 18c	B30EP-176-593-YL	B-593	Yellow	1.000 (25.4)	3.000 (76.2)	1	300	B30-R6000
All*	Fig. 18c	B30EP-177-593-YL	B-593	Yellow	2.500 (63.5)	3.000 (76.2)	1	125	B30-R6000
All*	Fig. 18c	B30EP-171-593-BK	B-593	Black	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-BK	B-593	Black	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-175-593-BK	B-593	Black	0.750 (19.1)	3.000 (76.2)	1	375	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-BK	B-593	Black	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-BK	B-593	Black	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-176-593-BK	B-593	Black	1.000 (25.4)	3.000 (76.2)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-177-593-BK	B-593	Black	2.500 (63.5)	3.000 (76.2)	1	125	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-GN	B-593	Green	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-GN	B-593	Green	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-175-593-GN	B-593	Green	0.750 (19.1)	3.000 (76.2)	1	375	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-GN	B-593	Green	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-GN	B-593	Green	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-176-593-GN	B-593	Green	1.000 (25.4)	3.000 (76.2)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-177-593-GN	B-593	Green	2.500 (63.5)	3.000 (76.2)	1	125	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-RD	B-593	Red	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-RD	B-593	Red	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-RD	B-593	Red	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-RD	B-593	Red	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-SL	B-593	Silver	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-SL	B-593	Silver	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-173-593-SL	B-593	Silver	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-SL	B-593	Silver	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000

U.S. Patent No. US8475914B2; US9005729B2.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Polyester Labels

(B-422, B-423, B-430, B-432, B-483, B-484A and B-489)

- For product, circuit board and component ID as well as for general purpose industrial identification
- Ideal for textured and curved surfaces

B-423: Service temp: -94° F to 248° F Agency approvals:   
 B-430: Service temp: -40° F to 212° F Agency approvals:   
 B-432: Service temp: -40° F to 212° F Agency approvals:   
 B-483: Service temp: -94° F to 248° F Agency approvals:   
 B-484A: Service temp: -40° F to 240° F Agency approvals:   
 B-489: Service temp: -94° F to 248° F Agency approvals:   



Figure 1




Figure 2




Figure 3




Figure 4

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive (B-423 gloss white):									
i3300, BBP33	Fig. 4	B33-11-423	B-423	Gloss White	0.250 (6.4)	0.250 (6.4)	12	15000	B30-R6000
i3300, BBP33	Fig. 1	B33-38-423	B-423	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-149-423	B-423	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-1-423	B-423	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-46-423	B-423	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-49-423	B-423	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-103-423	B-423	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-3-423	B-423	Gloss White	1.000 (25.4)	0.375 (9.5)	3	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-423	B-423	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-43-423	B-423	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-29-423	B-423	Gloss White	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-45-423	B-423	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-72-423	B-423	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-53-423	B-423	Gloss White	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-423	B-423	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-423	B-423	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-423	B-423	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-423	B-423	Gloss White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-423	B-423	Gloss White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R6000
Standard adhesive (B-430 clear):									
i3300, BBP33	Fig. 1	B33-5-430	B-430	Clear	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-430	B-430	Clear	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-430	B-430	Clear	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
Strong adhesive for textured surfaces (B-422 gloss white):									
i3300, BBP33	Fig. 1	B33-149-422	B-422	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-422	B-422	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-147-422	B-422	Gloss White	1.500 (38.1)	0.375 (9.5)	2	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-102-422	B-422	Gloss White	1.500 (38.1)	0.375 (9.5)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-422	B-422	Gloss White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-422	B-422	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-422	B-422	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-422	B-422	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-76-422	B-422	Gloss White	4.000 (101.6)	3.000 (76.2)	1	500	B30-R6000

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36


Polyester Labels (continued)

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Stronger adhesive for textured surfaces (B-432 clear):									
i3300, BBP33	Fig. 1	B33-149-432	B-432	Clear	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-432	B-432	Clear	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-432	B-432	Clear	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-432	B-432	Clear	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-432	B-432	Clear	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-432	B-432	Clear	4.000 (101.6)	120 ft. (36.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured surfaces (B-483 gloss white):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	Gloss White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	Gloss White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-483	B-483	Gloss White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured surfaces (B-489 matte white):									
i3300, BBP33	Fig. 1	B33-5-489	B-489	Matte White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-489	B-489	Matte White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-489	B-489	Matte White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-489	B-489	Matte White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-489	B-489	Matte White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A gloss white):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	Gloss White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	Gloss White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-484	B-484A	Gloss White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R6000
Permanent acrylic adhesive (B-488 matte white)									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-488	B-488	Matte White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Self-extinguishing polyvinylfluoride (B-787 gloss white)									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-787	B-787	Gloss White	4.000 (101.6)	60 ft. (18.3 m)	1 roll (cont.)		B30-R6000

Technical Data Sheets

Technical Data Sheets for all Brady label materials are available at:

BradyID.com/techdata

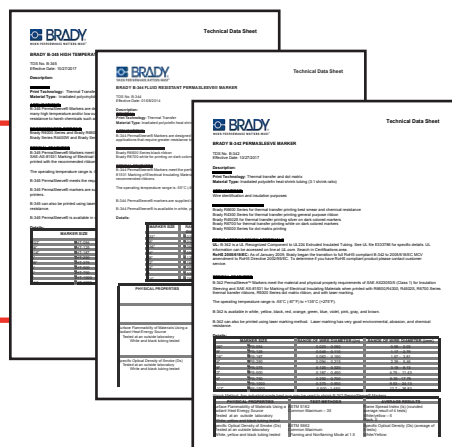

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Metallized Polyester Labels (B-428, B-434, B-435, B-438, B-486 and B-565)

- For product labeling, asset tracking and general industrial identification
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish

B-428: Service temp: -40° F to 293° F Agency approvals:   
 B-434: Service temp: -40° F to 194° F Agency approvals:   
 B-435: Service temp: -40° F to 194° F Agency approvals:   
 B-438: Service temp: -40° F to 104° F Agency approvals:   
 B-480: Service temp: -94° F to 248° F Agency approvals:   
 B-486: Service temp: -40° F to 248° F Agency approvals:   
 B-565: Service temp: -40° F to 240° F Agency approvals:   




Figure 1




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive for smooth surfaces (B-428 matte):									
i3300, BBP33	Fig. 1	B33-5-428	B-428	Matte Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-53-428	B-428	Matte Silver	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-428	B-428	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-428	B-428	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-428	B-428	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-428	B-428	Matte Silver	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-428	B-428	Matte Silver	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Standard adhesive for smooth surfaces (B-565 matte):									
All*	Fig. 3	B30C-1125-565-SL	B-565	Matte Silver	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
All*	Fig. 3	B30C-2250-565-SL	B-565	Matte Silver	2.250 (57.5)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
All* ✂	Fig. 3	B30C-4000-565-SL	B-565	Matte Silver	4.000 (101.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
Standard adhesive for smooth surfaces (B-435 gloss):									
i3300, BBP33	Fig. 2	B33-18-435	B-435	Gloss Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-435	B-435	Gloss Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-435	B-435	Gloss Silver	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Stronger adhesive for rougher surfaces (B-434 gloss):									
i3300, BBP33	Fig. 1	B33-5-434	B-434	Gloss Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-434	B-434	Gloss Silver	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-434	B-434	Gloss Silver	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-434	B-434	Gloss Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-434	B-434	Gloss Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-434	B-434	Gloss Silver	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-434	B-434	Gloss Silver	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive with metallic looking finish (B-480 satin):									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-480	B-480	Light Gray	4.000 (101.6)	115 ft. (35.1 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured, powder coated and low surface energy surfaces (B-486 matte):									
i3300, BBP33	Fig. 2	B33-59-486	B-486	Matte Silver	1.000 (25.4)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 1	B33-5-486	B-486	Matte Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-53-486	B-486	Matte Silver	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-486	B-486	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1300	B30-R4300
i3300, BBP33	Fig. 2	B33-7-486	B-486	Matte Silver	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R4300
i3300, BBP33	Fig. 2	B33-18-486	B-486	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1300	B30-R4300
i3300, BBP33	Fig. 2	B33-19-486	B-486	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-76-486	B-486	Matte Silver	4.000 (101.6)	3.000 (76.2)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-161-486	B-486	Matte Silver	4.000 (101.6)	4.000 (101.6)	1	250	B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 2	B30C-4000-486	B-486	Matte Silver	4.000 (101.6)	115 ft. (35.1 m)	1 roll (cont.)		B30-R4300

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Tamper-Evident Asset ID Labels (B-438)

Leaves checkerboard footprint on surface and on label if removed to prevent re-use

Service temp: -40° F to 104° F

Agency approvals:   




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 2	B30-17-438	B-438	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1225	B30-R4300
All*	Fig. 2	B30-18-438	B-438	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1225	B30-R4300
All*	Fig. 2	B30-222-438	B-438	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	650	B30-R4300
All*	Fig. 3	B30C-3000-438-SL	B-438	Matte Silver	3.000 (76.2)	100 ft. (30.5 m)	1 roll (cont.)		B30-R4300

Paper Labels (B-424)

- Economical choice for light duty general ID
- White finish and matte topcoat
- Excellent contrast and smear resistance for barcode printing

Service temp: -40° F to 124° F

Agency approvals: 




Figure 2



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-53-424	B-424	White	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-424	B-424	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-7-424	B-424	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R4300
i3300, BBP33	Fig. 2	B33-18-424	B-424	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-424	B-424	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-20-424	B-424	White	3.000 (76.2)	5.000 (127)	1	250	B30-R4300
i3300, BBP33	Fig. 2	B33-55-424	B-424	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R4300
i3300, BBP33	Fig. 2	B33-25-424	B-424	White	4.000 (101.6)	6.000 (152.4)	1	350	B30-R4300
S3000, S3100, i3300, BBP35, BBP37	✗ Fig. 3	B30C-4000-424	B-424	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R4300

Polypropylene Labels (B-425)

- General labeling material for indoor use
- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

Service temp: -94° F to 212° F

Agency approvals:    




Figure 1




Figure 2



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-5-425	B-425	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-425	B-425	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-425	B-425	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-425	B-425	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300

✗ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:

BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Standard Polyimide Labels (B-724 and B-727)

Top- or bottom-side component ID or board ID labels that withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards

B-727: Service temp: -94° F to 212° F

(short burst max temp: 80 sec at 572° F, 5 min at 500° F, 2 hrs at 338° F)

Agency approvals:  RoHS

B-724: Service temp: -94° F to 518° F

(short burst max temp: 80 sec at 626° F, 5 min at 536° F)

Agency approvals: RoHS


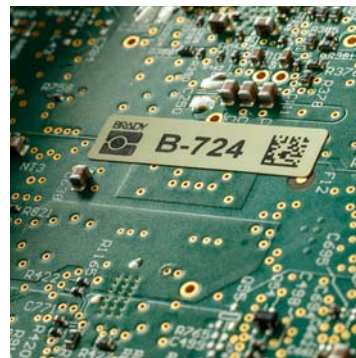


Figure 1




Figure 2




Figure 3

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard temperature (B-727 gloss white):									
i3300, BBP33	Fig. 1	B33-11-727	B-727	Gloss White	0.250 (6.35)	0.250 (6.4)	12	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-38-727	B-727	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-149-727	B-727	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-1-727	B-727	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-49-727	B-727	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-2-727	B-727	Gloss White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-103-727	B-727	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-58-727	B-727	Gloss White	1.000 (25.4)	0.375 (9.5)	1	4000	B30-R6000
i3300, BBP33	Fig. 2	B33-59-727	B-727	Gloss White	1.000 (25.4)	0.500 (12.7)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-43-727	B-727	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-44-727	B-727	Gloss White	1.375 (34.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-45-727	B-727	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-72-727	B-727	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-727	B-727	Gloss White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Extremely high temperature (B-724 matte amber):									
i3300, BBP33	Fig. 1	B33-149-724	B-724	Matte Amber	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-46-724	B-724	Matte Amber	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-1-724	B-724	Matte Amber	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-2-724	B-724	Matte Amber	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-43-724	B-724	Matte Amber	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-4-724	B-724	Matte Amber	1.500 (38.1)	0.250 (6.4)	2	5000	B30-R4300
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-724	B-724	Matte Amber	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Static Dissipative Polyimide Labels (B-717, B-718 and B-719)

- Circuit board and electronic component identification with static dissipative adhesive and release liner with surface resistivity values recommended for dissipative ESD packaging
- Complies with EIA-541 packaging material standards for ESD sensitive items
- For top- or bottom-side component or board identification

Service temp: -94° F to 212° F (short burst max temp:

80 sec at 572° F, 5 min at 500° F, 2 hrs at 338° F)

Agency approvals:  RoHS




Figure 1




Figure 2




Figure 4



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard thickness (B-717 gloss white):									
i3300, BBP33	Fig. 2	* B33-46-717	B-717	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-103-717	B-717	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-717	B-717	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-45-717	B-717	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
Low-profile label (B-718 gloss white):									
i3300, BBP33	Fig. 4	* B33-11-718	B-718	Gloss White	0.250 (6.4)	0.250 (6.4)	12	1500	B30-R6000
i3300, BBP33	Fig. 1	* B33-38-718	B-718	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-149-718	B-718	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-1-718	B-718	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-46-718	B-718	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-49-718	B-718	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-718	B-718	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-45-718	B-718	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-72-718	B-718	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
Low-profile label to prevent sticking of solder balls (B-719 matte white):									
i3300, BBP33	Fig. 1	* B33-38-719	B-719	Matte White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-46-719	B-719	Matte White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-2-719	B-719	Matte White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-719	B-719	Matte White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000

*  **WARNING:** Cancer www.P65Warnings.ca.gov

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:

BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Panel ID Labels

(B-483, B-484A, B-499, B-593 and B-595)

- Various sizes in several durable material types
- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40° F to 248° F Agency approvals:   
 B-484A: Service temp: -40° F to 240° F Agency approvals:   
 B-499: Service temp: -40° F to 193° F Agency approvals:   
 B-593: Service temp: -4° F to 212° F Agency approvals:   
 B-595: Service temp: -40° F to 180° F Agency approvals: 




Figure 1




Figure 2




Figure 3




Figure 18c




Figure 70

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon cloth with permanent adhesive (B-499):									
i3300, BBP33	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	4	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	4	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-126-499	B-499	White	0.900 (22.9)	0.500 (12.7)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	1	1100	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	2.000 (50.8)	0.250 (6.4)	1	1500	B30-R6000
Polyester with ultra-aggressive adhesive for highly textured and low surface energy surfaces (B-483):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Polyester with ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
Raised profile polyester with ultra-aggressive adhesive (B-593):									
All*	Fig. 18c	B30EP-171-593-WT	B-593	White	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-171-593-BK	B-593	Black	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
Pre-printed vinyl with permanent adhesive and is conformable and indoor / outdoor grade (B-595):									
All*	Fig. 70	B30-241-595-ANSIDA	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIDA	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIWA	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIWA	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Self-Laminating Wire and Cable Labels (B-427)

- Brady's most popular wire marker
- Features white printable area with clear tail that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- Vinyl with permanent acrylic adhesive designed specifically for tightly curved surfaces

Service temp: -40° F to 158° F
Agency approvals:  




Figure 9a




Figure 12




Figure 14




Figure 15

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Print Area Height F Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 12	B33-80-427	B-427	White	0.500 (12.7)	0.750 (19.1)	0.375 (9.5)	4	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-113-427	B-427	White	0.500 (12.7)	1.000 (25.4)	0.375 (9.5)	4	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-8-427	B-427	White	0.500 (12.7)	1.437 (36.5)	0.500 (12.7)	5	5000	B30-R4300
i3300, BBP33	Fig. 12	B33-56-427	B-427	White	0.750 (19.1)	0.937 (23.8)	0.375 (9.5)	4	5000	B30-R4300
i3300, BBP33	Fig. 12	B33-73-427	B-427	White	0.750 (19.1)	1.750 (44.6)	0.500 (12.7)	4	3500	B30-R4300
i3300, BBP33	Fig. 12	B33-74-427	B-427	White	0.800 (20.3)	1.437 (36.5)	0.500 (12.7)	4	4000	B30-R4300
i3300, BBP33	Fig. 12	B33-115-427	B-427	White	1.000 (25.4)	0.750 (19.1)	0.375 (9.5)	2	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-116-427	B-427	White	1.000 (25.4)	1.000 (25.4)	0.375 (9.5)	2	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-9-427	B-427	White	1.000 (25.4)	1.437 (36.5)	0.500 (12.7)	3	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-75-427	B-427	White	1.000 (25.4)	2.250 (57.2)	0.750 (19.1)	2	1400	B30-R4300
i3300, BBP33	Fig. 15	B33-131-427	B-427	White	1.000 (25.4)	2.625 (66.7)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 12	B33-10-427	B-427	White	1.000 (25.4)	3.750 (95.3)	1.000 (25.4)	3	1200	B30-R4300
i3300, BBP33	Fig. 12	B33-81-427	B-427	White	1.000 (25.4)	6.000 (152.4)	1.500 (38.1)	2	500	B30-R4300
i3300, BBP33	Fig. 9a*	B33-135-427AW	B-427	All White*	1.500 (38.1)	0.750 (19.1)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 14	B33-118-427	B-427	White	1.500 (38.1)	1.000 (25.4)	0.375 (9.5)	1	1250	B30-R4300
i3300, BBP33	Fig. 14	B33-119-427	B-427	White	1.500 (38.1)	1.500 (38.1)	0.500 (12.7)	1	1000	B30-R4300
i3300, BBP33	Fig. 14	B33-272-427	B-427	White	1.500 (38.1)	2.250 (57.2)	0.750 (19.1)	1	700	B30-R4300
i3300, BBP33	Fig. 14	B33-120-427	B-427	White	1.750 (44.5)	1.000 (25.4)	0.375 (9.5)	1	1250	B30-R4300
i3300, BBP33	Fig. 14	B33-121-427	B-427	White	1.750 (44.5)	1.500 (38.1)	0.500 (12.7)	1	1000	B30-R4300
i3300, BBP33	Fig. 14	B33-273-427	B-427	White	1.750 (44.5)	2.250 (57.2)	0.750 (19.1)	1	500	B30-R4300
i3300, BBP33	Fig. 9a*	B33-137-427AW	B-427	All White*	2.000 (50.8)	1.000 (25.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 14	B33-27-427	B-427	White	2.000 (50.8)	3.750 (95.3)	1.000 (25.4)	1	400	B30-R4300
i3300, BBP33	Fig. 14	B33-26-427	B-427	White	2.500 (63.5)	2.250 (57.2)	0.750 (19.1)	1	500	B30-R4300
i3300, BBP33	Fig. 14	B33-82-427	B-427	White	2.000 (50.8)	6.000 (152.4)	1.500 (38.1)	1	200	B30-R4300

* Label is all white and does not have a clear over-laminate.

Zero-Halogen Cable Markers (B-7643)

Thermoplastic polyether polyurethane is a zero-halogen high-density, thermoplastic cable marker designed for dot matrix or thermal-transfer printing.

- Meets the requirements of a halogen-free material per IEC 61249-2-21 (2003-11)
- Excellent chemical, oil and water resistance

Service temp: -40° F to 193° F (-40° C to 90° C)
Agency approvals: 




Figure 61



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 61	B33-6010-7643-WT	B-7643	White	2.36 (60)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7525-7643-WT	B-7643	White	2.95 (75)	0.98 (24.9)	250	B30-R6000
i3300, BBP33	Fig. 61	B33-7510-7643-WT	B-7643	White	2.95 (75)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7515-7643-WT	B-7643	White	2.95 (75)	0.59 (14.9)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-6010-7643-YL	B-7643	Yellow	2.36 (60)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7525-7643-YL	B-7643	Yellow	2.95 (75)	0.98 (24.9)	250	B30-R6000
i3300, BBP33	Fig. 61	B33-7510-7643-YL	B-7643	Yellow	2.95 (75)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7515-7643-YL	B-7643	Yellow	2.95 (75)	0.59 (14.9)	500	B30-R6000

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

High-Temp Adhesive Topcoated Polyvinylfluoride Wire and Cable Labels (B-437)

- Topcoated polyvinylfluoride label for wire and cable marking where high temperature and self-extinguishing features are required
- Heavy-duty performance with excellent resistance to water, oil and fluids
- Meets MIL-M-87958 Standard

Service temp: -94° F to 275° F

Agency approvals:

Also available in self-laminating format.
Contact Brady to order custom
B-642 material and B30-R4300 ribbon.





Figure 1




Figure 3




Figure 4

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 4	B33-11-437	B-437	White	0.250 (6.4)	0.250 (6.4)	12	15000	B30-R4300
i3300, BBP33	Fig. 1	B33-1-437	B-437	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-2-437	B-437	White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-437	B-437	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-437	B-437	White	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-437YL	B-437	Yellow	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-437YL	B-437	Yellow	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
Continuous Rolls:									
i3300, BBP33	Fig. 3	B33C-1000-437	B-437	White	1.000 (25.4)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-437	B-437	White	1.500 (38.1)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-437	B-437	White	2.000 (50.8)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-437	B-437	White	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-437	B-437	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1000-437YL	B-437	Yellow	1.000 (25.4)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-437YL	B-437	Yellow	1.500 (38.1)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-437YL	B-437	Yellow	2.000 (50.8)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-437YL	B-437	Yellow	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300

Vinyl Cloth Adhesive Wire and Cable Labels (B-498)

- A vinyl cloth label for marking wires, cables and inside-panel components
- Repositionable — a highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and reapplication
- Ideal choice for marking both ends of a wire that you may need to cut shorter before final termination

Service temp: -40° F to 175° F

Agency approvals:




Figure 1



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-90-498	B-498	White	0.250 (6.4)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-68-498	B-498	White	0.500 (12.7)	0.750 (19.1)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-87-498	B-498	White	0.500 (12.7)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-1-498	B-498	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-91-498	B-498	White	0.750 (19.1)	0.937 (23.8)	4	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-95-498	B-498	White	0.800 (20.3)	1.437 (36.5)	3	2300	B30-R6200
i3300, BBP33	Fig. 1	B33-5-498	B-498	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-88-498	B-498	White	1.000 (25.4)	0.750 (19.1)	2	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-89-498	B-498	White	1.000 (25.4)	1.437 (36.5)	3	2300	B30-R6200

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

High-Temp Adhesive Polyimide Wire and Cable Labels (B-472)

- Top-coated polyimide label for wire and cable marking applications where high temperature and self-extinguishing features are required
- Heavy-duty performance with excellent resistance to water, oil and other fluids

Service temp: -94° F to 320° F
Agency approvals: **RoHS**




Figure 1




Figure 3




Figure 4



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 4	B33-11-472	B-472	White	0.250 (6.4)	0.250 (6.4)	12	15000	B30-R4300
i3300, BBP33	Fig. 1	B33-1-472	B-472	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-2-472	B-472	White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-472	B-472	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-472	B-472	White	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-472YL	B-472	Yellow	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-472YL	B-472	Yellow	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
Continuous Rolls:									
i3300, BBP33	Fig. 3	B33C-1000-472	B-472	White	1.000 (25.4)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-472	B-472	White	1.500 (38.1)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-472	B-472	White	2.000 (50.8)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-472	B-472	White	3.000 (76.2)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1000-472YL	B-472	Yellow	1.000 (25.4)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-472YL	B-472	Yellow	1.500 (38.1)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-472YL	B-472	Yellow	2.000 (50.8)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-472YL	B-472	Yellow	3.000 (76.2)	85 ft. (25.9 m)	1 roll (cont.)		B30-R4300

Terminal Block Adhesive Strips (B-498)

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and vinyl cloth construction gives excellent holding power and still allows for clean removal and reapplication

Service temp: -40° F to 175° F
Agency approvals: **UL** **RoHS** **SE**




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 3	B33C-312-498	B-498	White	0.312 (7.9)	85 (25.9)	1 roll (cont.)	B30-R6200
i3300, BBP33	Fig. 3	B33C-375-498	B-498	White	0.375 (9.5)	85 (25.9)	1 roll (cont.)	B30-R6200

Patch Panel Adhesive Strips (B-422)

- Continuous supply makes labeling patch panels and other datacomm components quick and easy
- Aggressive adhesive suitable for rough, highly-textured and powder-coated surfaces as well as smooth surfaces

Service temp: -40° F to 212° F
Agency approvals: **UL** **RoHS** **SE**




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 3	B33C-312-422	B-422	White	0.312 (7.9)	85 (25.9)	1 roll (cont.)	B30-R6000
i3300, BBP33	Fig. 3	B33C-375-422	B-422	White	0.375 (9.5)	85 (25.9)	1 roll (cont.)	B30-R6000

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

PermaSleeve® PS Polyolefin Wire Markers (B-342)

Military / industrial grade sleeves offer the ultimate in marker durability, permanence and aesthetic appearance. 3:1 heat-shrinkable markers fit snugly around wires, are fade-resistant and flame-retardant.

Meets specifications:

- SSAE-AS-23053/5
- SAE-AS-81531

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202

Service temp: -40° F to 275° F

(short burst max temp: 5 min at 500° F, 24 hrs at 350° F)

Agency approvals:  RoHS




Figure 20




Figure 20-2
(perforated)



Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
3:1 Shrink ratio, single-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	* B33-94-2-342	B-342	Wt.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33-125-2-342	B-342	Wt.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33-187-2-342	B-342	Wt.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4300
i3300, BBP33	Fig. 20	* B33-250-2-342	B-342	Wt.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33-375-2-342	B-342	Wt.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33-500-2-342	B-342	Wt.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4300
i3300, BBP33	Fig. 20	* B33-750-2-342	B-342	Wt.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33-1000-2-342	B-342	Wt.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33-1500-2-342	B-342	Wt.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4300
i3300, BBP33	Fig. 20	* B33-94-2-342YL	B-342	Ylw.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33-125-2-342YL	B-342	Ylw.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33-187-2-342YL	B-342	Ylw.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4300
i3300, BBP33	Fig. 20	* B33-250-2-342YL	B-342	Ylw.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33-375-2-342YL	B-342	Ylw.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33-500-2-342YL	B-342	Ylw.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4300
i3300, BBP33	Fig. 20	* B33-750-2-342YL	B-342	Ylw.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33-1000-2-342YL	B-342	Ylw.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33-1500-2-342YL	B-342	Ylw.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4300
i3300, BBP33	Fig. 20	* B33-1500-2-342BK	B-342	Blk.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	B30-R4500-SV
3:1 Shrink ratio, single-side printable, perforated material resulting in two 1 inch width sleeves (dimension A):											
i3300, BBP33	Fig. 20-2	* B33-94-2-342-2	B-342	Wt.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-125-2-342-2	B-342	Wt.	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-187-2-342-2	B-342	Wt.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	2	1500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-250-2-342-2	B-342	Wt.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	2	1000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-375-2-342-2	B-342	Wt.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	2	1000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-500-2-342-2	B-342	Wt.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	.025 (0.6) +/- .003 (0.07)	2	700 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-750-2-342-2	B-342	Wt.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.1)	0.250 (6.35)	.025 (0.6) +/- .003 (0.07)	2	500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-1000-2-342-2	B-342	Wt.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	2	500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-1500-2-342-2	B-342	Wt.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	2	150 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-94-2-342YL-2	B-342	Ylw.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-125-2-342YL-2	B-342	Ylw.	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-750-2-342YL-2	B-342	Ylw.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.1)	0.250 (6.35)	.025 (0.6) +/- .003 (0.07)	2	500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-500-2-342YL-2	B-342	Ylw.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	.025 (0.6) +/- .003 (0.07)	2	700 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-1000-2-342YL-2	B-342	Ylw.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	2	500 B30-R4300
i3300, BBP33	Fig. 20-2	* B33-1500-2-342YL-2	B-342	Ylw.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	2	300 B30-R4300

*  **WARNING:** Cancer www.P65Warnings.ca.gov

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B-342 PermaSleeve® PS Polyolefin Wire Markers (continued)

Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
3:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	* B33D-94-2-342	B-342	Wt.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-125-2-342	B-342	Wt.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-125-2-342-2	B-342	Wt.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	2	2000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-187-2-342	B-342	Wt.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4300
i3300, BBP33	Fig. 20	* B33D-250-2-342	B-342	Wt.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33D-375-2-342	B-342	Wt.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33D-500-2-342	B-342	Wt.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4300
i3300, BBP33	Fig. 20	* B33D-750-2-342	B-342	Wt.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33D-1000-2-342	B-342	Wt.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33D-1500-2-342	B-342	Wt.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4300
i3300, BBP33	Fig. 20	* B33D-94-2-342YL	B-342	Ylw.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-125-2-342YL	B-342	Ylw.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4300
i3300, BBP33	Fig. 20	* B33D-187-2-342YL	B-342	Ylw.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4300
i3300, BBP33	Fig. 20	* B33D-250-2-342YL	B-342	Ylw.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33D-375-2-342YL	B-342	Ylw.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4300
i3300, BBP33	Fig. 20	* B33D-500-2-342YL	B-342	Ylw.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4300
i3300, BBP33	Fig. 20	* B33D-750-2-342YL	B-342	Ylw.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33D-1000-2-342YL	B-342	Ylw.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4300
i3300, BBP33	Fig. 20	* B33D-1500-2-342YL	B-342	Ylw.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4300
i3300, BBP33	Fig. 20	* B33D-94-2-342BK	B-342	Blk.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	.024 (0.6) +/- .003 (0.07)	1	1000 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-125-2-342BK	B-342	Blk.	22 to 16	0.046 (1.2) - 1.110 (2.8)	0.125 (3.2)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-187-2-342BK	B-342	Blk.	20 to 10	0.062 (1.6) - 0.150 (3.8)	0.187 (4.7)	0.062 (1.6)	.020 (0.5) +/- .003 (0.07)	1	750 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-250-2-342BK	B-342	Blk.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.4)	0.093 (2.4)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-375-2-342BK	B-342	Blk.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.1)	.025 (0.6) +/- .003 (0.07)	1	500 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-500-2-342BK	B-342	Blk.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) +/- .003 (0.07)	1	350 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-750-2-342BK	B-342	Blk.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) +/- .003 (0.07)	1	250 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-1000-2-342BK	B-342	Blk.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) +/- .003 (0.07)	1	250 B30-R4500-SV
i3300, BBP33	Fig. 20	* B33D-1500-2-342BK	B-342	Blk.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) +/- .003 (0.07)	1	150 B30-R4500-SV

*  **WARNING:** Cancer www.P65Warnings.ca.gov

QuickSleeve Handheld Sleeve Applicator

The QuickSleeve Handheld Sleeve Applicator is an intuitive multi-tool designed to help you quickly apply sleeves on to wires in three simple steps – just pick, slip and apply. This tool includes:


- Four specially designed slanted tubes sized for sleeve sizes 0.094, 0.125, 0.187 and 0.250 inches
- Built-in LED flashlight for use in low-lit conditions
- Terminal block sized screwdriver



Catalog #	Description	Qty.
QS	Quicksleeve Multi-Tool	1 Set



Pick



Slip



Apply

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

PermaSleeve® HT High-Temperature PVDF Wire Markers (B-345)

Military / industrial grade 2:1 heat shrinkable sleeves specifically designed for high-temperature and low-vacuum outgassing applications. Irradiated high-temp polyvinylidene fluoride (PVDF) is fade-resistant and flame-retardant.

Meets specifications:

- NASA SP-R-0022A
Outgassing Performance
- SAE-AS-81531

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202

Service temp: -67° F to 437° F
Agency approvals: **RoHS**




Figure 20



Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	B33D-94-2-345	B-345	Wt.	26 to 20	0.031 (0.8) - 0.080 (2.0)	0.094 (2.4)	0.031 (0.8)	.015 (0.4) +/- .003 (0.07)	1	1000 B30-R6000
i3300, BBP33	Fig. 20	B33D-94-2-345BK	B-345	Blk.	26 to 20	0.031 (0.8) - 0.080 (2.0)	0.094 (2.4)	0.031 (0.8)	.015 (0.4) +/- .003 (0.07)	1	1000 B30-R4400-WT
2:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	B33D-125-2-345	B-345	Wt.	20 to 16	0.063 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.062 (1.6)	.015 (0.4) +/- .003 (0.07)	1	1000 B30-R6000
i3300, BBP33	Fig. 20	B33D-187-2-345	B-345	Wt.	16 to 10	0.094 (2.4) - 0.150 (3.8)	0.187 (4.7)	0.093 (2.4)	.015 (0.4) +/- .003 (0.07)	1	750 B30-R6000
i3300, BBP33	Fig. 20	B33D-250-2-345	B-345	Wt.	12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	.015 (0.4) +/- .003 (0.07)	1	500 B30-R6000
i3300, BBP33	Fig. 20	B33D-375-2-345	B-345	Wt.	8 to 4	0.187 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	.015 (0.4) +/- .003 (0.07)	1	500 B30-R6000
i3300, BBP33	Fig. 20	B33D-500-2-345	B-345	Wt.	6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	.015 (0.4) +/- .003 (0.07)	1	350 B30-R6000
i3300, BBP33	Fig. 20	B33D-750-2-345	B-345	Wt.	2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.375 (9.5)	.015 (0.4) +/- .003 (0.07)	1	250 B30-R6000
i3300, BBP33	Fig. 20	B33D-1000-2-345	B-345	Wt.	2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.017 (0.4) +/- .004 (0.1)	1	250 B30-R6000
i3300, BBP33	Fig. 20	B33D-1500-2-345	B-345	Wt.	N/A	0.750 (19.1) - 1.400 (35.6)	1.500 (38.1)	0.750 (19.1)	.024 (0.6) +/- .004 (0.1)	1	150 B30-R6000
i3300, BBP33	Fig. 20	B33D-125-2-345BK	B-345	Blk.	20 to 16	0.063 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.062 (1.6)	.015 (0.4) +/- .003 (0.07)	1	1000 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-187-2-345BK	B-345	Blk.	16 to 10	0.094 (2.4) - 0.150 (3.8)	0.187 (4.7)	0.093 (2.4)	.015 (0.4) +/- .003 (0.07)	1	750 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-250-2-345BK	B-345	Blk.	12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.125 (3.2)	.015 (0.4) +/- .003 (0.07)	1	500 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-375-2-345BK	B-345	Blk.	8 to 4	0.187 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.187 (4.7)	.015 (0.4) +/- .003 (0.07)	1	500 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-500-2-345BK	B-345	Blk.	6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.250 (6.4)	.015 (0.4) +/- .003 (0.07)	1	350 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-750-2-345BK	B-345	Blk.	3 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.375 (9.5)	.015 (0.4) +/- .003 (0.07)	1	250 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-1000-2-345BK	B-345	Blk.	2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.017 (0.4) +/- .004 (0.1)	1	250 B30-R4400-WT
i3300, BBP33	Fig. 20	B33D-1500-2-345BK	B-345	Blk.	N/A	0.750 (19.1) - 1.400 (35.6)	1.500 (38.1)	0.750 (19.1)	.024 (0.6) +/- .004 (0.1)	1	150 B30-R4400-WT

Print double-sided wire sleeves with the BradyPrinter i3300 Industrial Label Printer

You can quickly create double-sided sleeve by using "B33D-" parts and Brady Workstation's two-sided print feature.

Once the first side of your print job is complete, the software prompts you to cut the media and re-insert it for a second print pass.



*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

PermaSleeve® HX Polyolefin Wire Markers (B-7642)

Military / industrial 2:1 heat-shrinkable sleeves are flame-retardant and high-temperature rated but not as high-temperature as B-345 HT sleeves.

Meets specifications:

- SAE-AS23053/5
- SAE-AS-81531

Tested per:

- ASTM E162 and ASTM E662
- MIL-STD-202

Service temp: -40° F to 248° F (short burst max temp: 5 min at 464° F, 24 hrs at 320° F)

Agency approval: **RoHS**




Figure 20



Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
2:1 Shrink ratio, single-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	B33-94-2-7642	B-7642	Wt. 24 to 20	0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
i3300, BBP33	Fig. 20	B33-125-2-7642	B-7642	Wt. 20 to 16	0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
i3300, BBP33	Fig. 20	B33-187-2-7642	B-7642	Wt. 16 to 10	0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R4300
i3300, BBP33	Fig. 20	B33-250-2-7642	B-7642	Wt. 12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	400	B30-R4300
i3300, BBP33	Fig. 20	B33-375-2-7642	B-7642	Wt. 8 to 4	0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
i3300, BBP33	Fig. 20	B33-500-2-7642	B-7642	Wt. 6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R4300
i3300, BBP33	Fig. 20	B33-750-2-7642	B-7642	Wt. 2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R4300
i3300, BBP33	Fig. 20	B33-1000-2-7642	B-7642	Wt. 2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R4300
i3300, BBP33	Fig. 20	B33-1500-2-7642	B-7642	Wt. N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R4300
i3300, BBP33	Fig. 20	B33-2000-2-7642	B-7642	Wt. N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	.045 (1.1) +/- .007 (0.2)	1	50	B30-R4300
2:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	B33D-94-2-7642	B-7642	Wt. 24 to 20	0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
i3300, BBP33	Fig. 20	B33D-125-2-7642	B-7642	Wt. 20 to 16	0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	500	B30-R4300
i3300, BBP33	Fig. 20	B33D-187-2-7642	B-7642	Wt. 16 to 10	0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R4300
i3300, BBP33	Fig. 20	B33D-250-2-7642	B-7642	Wt. 12 to 8	0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	400	B30-R4300
i3300, BBP33	Fig. 20	B33D-375-2-7642	B-7642	Wt. 8 to 4	0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	250	B30-R4300
i3300, BBP33	Fig. 20	B33D-500-2-7642	B-7642	Wt. 6 to 1	0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R4300
i3300, BBP33	Fig. 20	B33D-750-2-7642	B-7642	Wt. 2 to 4/0	0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R4300
i3300, BBP33	Fig. 20	B33D-1000-2-7642	B-7642	Wt. 2/0 to 0.950 dia	0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R4300
i3300, BBP33	Fig. 20	B33D-1500-2-7642	B-7642	Wt. N/A	0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R4300
i3300, BBP33	Fig. 20	B33D-2000-2-7642	B-7642	Wt. N/A	1.000 (25.4) - 1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	.045 (1.1) +/- .007 (0.2)	1	50	B30-R4300

PermaSleeve® LSZH Low-Smoke Zero-Halogen Polyolefin Wire Markers (B-7641)

Low-halogen, 2:1 heat-shrinkable sleeves offer outstanding fire safety properties and minimal smoke emission.

Meets specifications:

- SAE-AS-81531
- EN45545-2

Tested per:

- ASTM E162 and ASTM E662
- MIL-STD-202

Service temp: -22° F to 221° F

Agency approval: **RoHS**




Figure 20



Fits Printers	Figure	Catalog #	Material	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
2:1 Shrink ratio double-side printable, 2 inch sleeve width (dimension A):										
i3300, BBP33	Fig. 20	B33D-94-2-7641	B-7641	Wt. 0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
i3300, BBP33	Fig. 20	B33D-125-2-7641	B-7641	Wt. 0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
i3300, BBP33	Fig. 20	B33D-187-2-7641	B-7641	Wt. 0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R6000
i3300, BBP33	Fig. 20	B33D-250-2-7641	B-7641	Wt. 0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
i3300, BBP33	Fig. 20	B33D-375-2-7641	B-7641	Wt. 0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
i3300, BBP33	Fig. 20	B33D-500-2-7641	B-7641	Wt. 0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R6000
i3300, BBP33	Fig. 20	B33D-750-2-7641	B-7641	Wt. 0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R6000
i3300, BBP33	Fig. 20	B33D-1000-2-7641	B-7641	Wt. 0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R6000
i3300, BBP33	Fig. 20	B33D-1500-2-7641	B-7641	Wt. 0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R6000
i3300, BBP33	Fig. 20	B33D-94-2-7641Y	B-7641	Ylw. 0.047 (1.2) - 0.080 (2.0)	0.094 (2.4)	0.047 (1.2)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
i3300, BBP33	Fig. 20	B33D-125-2-7641Y	B-7641	Ylw. 0.062 (1.6) - 0.110 (2.8)	0.125 (3.2)	0.063 (1.6)	.020 (0.5) +/- .003 (0.07)	1	1000	B30-R6000
i3300, BBP33	Fig. 20	B33D-187-2-7641Y	B-7641	Ylw. 0.094 (2.4) - 0.151 (3.8)	0.187 (4.8)	0.094 (2.4)	.020 (0.5) +/- .003 (0.07)	1	450	B30-R6000
i3300, BBP33	Fig. 20	B33D-250-2-7641Y	B-7641	Ylw. 0.125 (3.2) - 0.215 (5.5)	0.250 (6.4)	0.126 (3.2)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
i3300, BBP33	Fig. 20	B33D-375-2-7641Y	B-7641	Ylw. 0.188 (4.8) - 0.320 (8.1)	0.375 (9.5)	0.189 (4.8)	.025 (0.6) +/- .003 (0.07)	1	500	B30-R6000
i3300, BBP33	Fig. 20	B33D-500-2-7641Y	B-7641	Ylw. 0.250 (6.4) - 0.450 (11.4)	0.500 (12.7)	0.252 (6.4)	.025 (0.6) +/- .003 (0.07)	1	225	B30-R6000
i3300, BBP33	Fig. 20	B33D-750-2-7641Y	B-7641	Ylw. 0.375 (9.5) - 0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	.030 (0.8) +/- .003 (0.07)	1	150	B30-R6000
i3300, BBP33	Fig. 20	B33D-1000-2-7641Y	B-7641	Ylw. 0.450 (11.4) - 0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	.035 (0.9) +/- .005 (0.1)	1	150	B30-R6000
i3300, BBP33	Fig. 20	B33D-1500-2-7641Y	B-7641	Ylw. 0.750 (19.0) - 1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	.040 (1.0) +/- .006 (0.2)	1	50	B30-R6000

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

PermaSleeve® FR Fluid-Resistant Wire Markers (B-344)

Military / industrial grade 3:1 heat-shrinkable sleeves are specifically designed for applications with exposure to fuels, lubricants and harsh chemicals such as in the installation of hydrogen fuel cells for aerospace. These sleeves are resistant to harsh chemicals including, JP8 Jet Fuel, Skydrol and DOT 3 brake fluid.

Meets specification:

- SAE-AS23053/5

Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202G

Service temp: -94° F to 275° F

Agency approvals: **RoHS**




Figure 20



Fits Printers	Figure	Catalog #	Material	For Wire Gauge (approx.)	Range For Wire Diameters Inch (mm)	Supplied Diameter B Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio, double-side printable, 2 inch sleeve width (dimension A):											
i3300, BBP33	Fig. 20	* B33D-94-2-344	B-344	Wt.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000 B30-R6600
i3300, BBP33	Fig. 20	* B33D-125-2-344	B-344	Wt.	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000 B30-R6600
i3300, BBP33	Fig. 20	* B33D-187-2-344	B-344	Wt.	20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750 B30-R6600
i3300, BBP33	Fig. 20	* B33D-250-2-344	B-344	Wt.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500 B30-R6600
i3300, BBP33	Fig. 20	* B33D-375-2-344	B-344	Wt.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500 B30-R6600
i3300, BBP33	Fig. 20	* B33D-500-2-344	B-344	Wt.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350 B30-R6600
i3300, BBP33	Fig. 20	* B33D-750-2-344	B-344	Wt.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250 B30-R6600
i3300, BBP33	Fig. 20	* B33D-1000-2-344	B-344	Wt.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250 B30-R6600
i3300, BBP33	Fig. 20	* B33D-1500-2-344	B-344	Wt.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150 B30-R6600
i3300, BBP33	Fig. 20	* B33D-94-2-344YL	B-344	Ylw.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000 B30-R6600
i3300, BBP33	Fig. 20	* B33D-125-2-344YL	B-344	Ylw.	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000 B30-R6600
i3300, BBP33	Fig. 20	* B33D-187-2-344YL	B-344	Ylw.	20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750 B30-R6600
i3300, BBP33	Fig. 20	* B33D-250-2-344YL	B-344	Ylw.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500 B30-R6600
i3300, BBP33	Fig. 20	* B33D-375-2-344YL	B-344	Ylw.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500 B30-R6600
i3300, BBP33	Fig. 20	* B33D-500-2-344YL	B-344	Ylw.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350 B30-R6600
i3300, BBP33	Fig. 20	* B33D-750-2-344YL	B-344	Ylw.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250 B30-R6600
i3300, BBP33	Fig. 20	* B33D-1000-2-344YL	B-344	Ylw.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250 B30-R6600
i3300, BBP33	Fig. 20	* B33D-1500-2-344YL	B-344	Ylw.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150 B30-R6600
i3300, BBP33	Fig. 20	* B33D-94-2-344BK	B-344	Blk.	28 to 20	0.023 (0.6) - 0.080 (2.0)	0.094 (2.4)	0.024 (0.6)	0.024 (0.6) +/- 0.003 (0.1)	1	1000 B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-125-2-344BK	B-344	Blk.	22 to 16	0.046 (1.2) - 0.111 (2.8)	0.125 (3.1)	0.047 (1.2)	0.020 (0.5) +/- 0.003 (0.1)	1	1000 B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-187-2-344BK	B-344	Blk.	20 to 10	0.062 (1.6) - 0.15 (3.81)	0.187 (4.8)	0.062 (1.6)	0.020 (0.5) +/- 0.003 (0.1)	1	750 B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-250-2-344BK	B-344	Blk.	16 to 8	0.094 (2.4) - 0.215 (5.5)	0.250 (6.35)	0.093 (2.4)	0.025 (0.6) +/- 0.003 (0.1)	1	500 B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-375-2-344BK	B-344	Blk.	12 to 4	0.125 (3.2) - 0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	0.025 (0.6) +/- 0.003 (0.1)	1	500 B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-500-2-344BK	B-344	Blk.	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.119 (3.0)	0.025 (0.6) +/- 0.003 (0.1)	1	350 B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-750-2-344BK	B-344	Blk.	6 to 4/0	0.250 (6.4) - 0.700 (17.8)	0.750 (19.05)	0.250 (6.35)	0.025 (0.6) +/- 0.003 (0.1)	1	250 B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-1000-2-344BK	B-344	Blk.	2 to 0.950 dia	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	0.036 (0.9) +/- 0.003 (0.1)	1	250 B30-R6700-WT
i3300, BBP33	Fig. 20	* B33D-1500-2-344BK	B-344	Blk.	n/a	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	0.035 (0.9) +/- 0.003 (0.1)	1	150 B30-R6700-WT

* **WARNING:** Cancer www.P65Warnings.ca.gov

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Color Polyester Labels (B-494)

- Adding color to labels reduces errors, increase efficiency and differentiates your lab samples
- Color printed below the label surface withstands the harshest lab environments, including liquid nitrogen, hot water baths and more
- Labels are resistant to common lab chemicals, like ethanol and xylene, when printed with the R6400 series ribbon

Service temp: -320° F to 70° F
Agency approvals: **RoHS**




Figure 2




Figure 24




Figure 25



Note: Label dimensions include the color area.

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vial Top Dia. C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 25	B33-152-494-BL	BBP33	Lt. Blue	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-BL	BBP33	Lt. Blue	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-BL	BBP33	Lt. Blue	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-GN	BBP33	Green	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-GN	BBP33	Green	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-GN	BBP33	Green	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-OR	BBP33	Orange	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-OR	BBP33	Orange	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-OR	BBP33	Orange	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-PK	BBP33	Pink	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-PK	BBP33	Pink	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-PK	BBP33	Pink	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-RD	BBP33	Red	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-RD	BBP33	Red	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-RD	BBP33	Red	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25	B33-152-494-YL	BBP33	Yellow	1.000 (25.4)	0.375 (9.5)	-	2	1500	B30-R6400
i3300, BBP33	Fig. 24	B33-250-494-YL	BBP33	Yellow	1.000 (25.4)	0.500 (12.7)	0.375 (9.5) dia.	1	1500	B30-R6400
i3300, BBP33	Fig. 2	B33-179-494-YL	BBP33	Yellow	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R6400

Sterilization Indicating Labels (B-7425-AC)

- Pre-printed STERILIZED header indicates steam sterilization when autoclaved at 250.7° F (121.5° C) for 10 minutes
- Labels withstand temperature ranges from -320° F to 248° F (-196° C to 121° C)
- For use in LN2, freezers, autoclave and hot water baths
- Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene

Service temp: -112° F to 158° F
Agency approvals: **RoHS**




Figure 81



Note: Label dimensions include the STERILIZED indicating area.

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 81	B33-235-7425-AC	B-7425-AC	White	1.500 (38.1)	1.000 (25.4)	1	1250	B30-R4300
i3300, BBP33	Fig. 81	B33-137-7425-AC	B-7425-AC	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Cryogenic Tube and Vial Labels (B-461, B-490, B-492 and B-7425)

FreezerBondz™ labels can be applied to room temperature or already frozen samples, with a small overlap. The label remains legible and will stick to the tube during processing, even when immersed in liquid or vapor-phase nitrogen and ultra-low temperature freezer storage.

- B-461 Self-Laminating Polyester: Ultra-thin label with clear overlaminate tail that protects print and allows liquid levels to be visible
- B-490 Polyester: Adhere to already frozen tubes and vials when wrapped around itself by at least 0.125 inch
- B-492 Polyester: Ultra-thin label for frosted, frozen or room temperature vials, tubes and canes. Superior chemical and abrasion resistance
- B-7425 Polypropylene: Ideal for labeling dry, room temperature specimen containers. Material withstands temperature ranges from -320° F to 248° F (-196° C to 121° C). Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene

B-461: Service temp: -321° F to 230° F

B-490: Service temp: -320° F to 366° F

B-492: Service temp: -320° F to 230° F

B-7425: Service temp: -112° F to 158° F

Agency approvals:

RoHS

RoHS

RoHS

RoHS




Figure 2



Figure 5




Figure 7




Figure 14c




Figure 15c




Figure 25a

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Print-On Height C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Self-Laminating Polyester (B-461):										
i3300, BBP33	Fig. 15c	B33-127-461	B-461	White	0.500 (12.7)	2.200 (55.9)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 15c	B33-133-461	B-461	White	0.600 (15.2)	1.625 (41.3)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 14c	B33-139-461	B-461	White	1.000 (25.4)	5.250 (133.4)	1.500 (38.1)	2	650	B30-R4300
i3300, BBP33	Fig. 15c	B33-123-461	B-461	White	1.800 (45.7)	0.375 (9.5)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 15c	B33-122-461	B-461	White	1.800 (45.7)	0.500 (12.7)	0.750 (19.1)	1	1500	B30-R4300
i3300, BBP33	Fig. 14c	B33-276-461	B-461	White	2.625 (66.7)	1.000 (25.4)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 15c	B33-134-461	B-461	White	3.500 (88.9)	1.500 (38.1)	1.250 (31.8)	1	1000	B30-R4300
i3300, BBP33	Fig. 15c	B33-153-461	B-461	White	0.600 (15.2)	2.625 (66.7)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 15c	B33-183-461	B-461	White	1.750 (44.4)	1.000 (25.4)	1.000 (25.4)	1	2000	B30-R4300
Polyester (B-490):										
i3300, BBP33	Fig. 5	B33-144-490	B-490	White	0.500 (12.7) dia.	-	-	3	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-68-490	B-490	White	0.500 (12.7)	0.750 (19.1)	-	4	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-125-490	B-490	White	0.900 (22.9)	0.500 (12.7)	-	1	1650	B30-R4300
i3300, BBP33	Fig. 7	B33-126-490	B-490	White	0.900 (22.9)	0.500 (12.7)	0.500 (12.7) dia.	1	2500 sets	B30-R4300
i3300, BBP33	Fig. 2	B33-154-490	B-490	White	1.250 (31.8)	0.375 (9.5)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-155-490	B-490	White	1.625 (41.3)	0.600 (15.2)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-156-490	B-490	White	1.900 (48.2)	1.000 (25.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-157-490	B-490	White	2.200 (55.9)	1.500 (38.1)	-	1	1000	B30-R4300
i3300, BBP33	Fig. 2	B33-158-490	B-490	White	3.750 (95.3)	1.750 (44.4)	-	1	1100	B30-R4300
Polyester (B-492):										
i3300, BBP33	Fig. 5	B33-143-492	B-492	White	0.375 (9.5) dia.	-	-	4	1500	B30-R6400
i3300, BBP33	Fig. 5	B33-144-492	B-492	White	0.500 (12.7) dia.	-	-	3	1500	B30-R6400
i3300, BBP33	Fig. 7	B33-182-492	B-492	White	0.500 (12.7)	1.000 (25.4)	0.440 (11.17) dia.	1	1500 sets	B30-R6400
i3300, BBP33	Fig. 2	B33-180-492	B-492	White	0.900 (22.9)	1.000 (25.4)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 25a	B33-152-492	B-492	White	1.000 (25.4)	0.375 (9.5)	-	2	2500	B30-R6400
i3300, BBP33	Fig. 7	B33-163-492	B-492	White	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	1	1500 sets	B30-R6400
i3300, BBP33	Fig. 7	B33-181-492	B-492	White	1.000 (25.4)	0.500 (12.7)	0.500 (12.7) dia.	1	1500 sets	B30-R6400
i3300, BBP33	Fig. 2	B33-59-492	B-492	White	1.000 (25.4)	0.500 (12.7)	-	1	5000	B30-R6400
i3300, BBP33	Fig. 2	B33-179-492	B-492	White	1.000 (25.4)	1.000 (25.4)	-	1	1900	B30-R6400
i3300, BBP33	Fig. 2	B33-155-492	B-492	White	1.625 (41.3)	0.600 (15.2)	-	1	1500	B30-R6400
i3300, BBP33	Fig. 7	B33-190-492	B-492	White	1.625 (41.3)	0.600 (15.2)	0.375 (9.5) dia.	1	1500 sets	B30-R6400
i3300, BBP33	Fig. 2	B33-156-492	B-492	White	1.900 (48.3)	1.000 (25.4)	-	1	1500	B30-R6400
Polypropylene (B-7425):										
i3300, BBP33	Fig. 2	B33-257-7425	B-7425	White	0.825 (21.0)	0.250 (6.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 25a	B33-152-7425	B-7425	White	1.000 (25.4)	0.375 (9.5)	-	2	2000	B30-R4300
i3300, BBP33	Fig. 2	B33-59-7425	B-7425	White	1.000 (25.4)	0.500 (12.7)	-	1	2000	B30-R4300
i3300, BBP33	Fig. 25a	B33-88-7425	B-7425	White	1.000 (25.4)	0.750 (19.1)	-	2	2000	B30-R4300
i3300, BBP33	Fig. 2	B33-256-7425	B-7425	White	1.300 (33.0)	0.600 (15.2)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 25a	B33-37-7425	B-7425	White	1.500 (38.1)	0.500 (12.7)	-	2	1500	B30-R4300

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Centrifuge and PCR Tube Labels (B-499 and B-7425)

Designed with ultra-thin material that prevents vials from jamming in centrifuges or racks, these labels withstand harsh temperatures and chemicals without falling off, fading or smearing.

- B-499 Nylon Cloth: White nylon cloth for easy handling and conformability
- B-7425 Polypropylene: Moderate chemical resistance, ideal for labeling dry, room temperature specimen containers that withstand temperature ranges from -320° F to 248° F (-196° C to 121° C). Chemical resistance to ethanol, DMSO, IPS, short-term xylene, 10% formalin, 50% acetic acid and toluene

B-499: Service temp: -40° F to 194° F Agency approvals:  RoHS 
B-7425: Service temp: -112° F to 158° F Agency approvals:  RoHS




Figure 2




Figure 5




Figure 7

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vial Top Dia. C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon Cloth (B-499):										
i3300, BBP33	Fig. 5	B33-143-499	B-499	White	0.375 (9.5) dia.	-	-	4	1500	B30-R6000
i3300, BBP33	Fig. 5	B33-144-499	B-499	White	0.500 (12.7) dia.	-	-	3	1500	B30-R6000
i3300, BBP33	Fig. 7	B33-126-499	B-499	White	0.900 (22.9)	0.500 (12.7)	0.500 (12.7) dia.	1	1500 sets	B30-R6000
Polypropylene (B-7425):										
i3300, BBP33	Fig. 2	B33-257-7425	B-7425	White	0.825 (21.0)	0.250 (6.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-152-7425	B-7425	White	1.000 (25.4)	0.375 (9.5)	-	2	2000	B30-R4300
i3300, BBP33	Fig. 7	B33-249-7425	B-7425	White	1.000 (25.4)	0.375 (9.5)	0.375 (9.5) dia.	1	1500 sets	B30-R4300
i3300, BBP33	Fig. 2	B33-59-7425	B-7425	White	1.000 (25.4)	0.500 (12.7)	-	1	2000	B30-R4300
i3300, BBP33	Fig. 7	B33-251-7425	B-7425	White	1.000 (25.4)	0.500 (12.7)	0.440 (11.1) dia.	1	1500 sets	B30-R4300
i3300, BBP33	Fig. 2	B33-179-7425	B-7425	White	1.000 (25.4)	1.000 (25.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-256-7425	B-7425	White	1.300 (33.0)	0.600 (15.2)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-37-7425	B-7425	White	1.500 (38.1)	0.500 (12.7)	-	2	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-136-7425	B-7425	White	1.500 (38.1)	0.750 (19.1)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-258-7425	B-7425	White	1.500 (38.1)	1.750 (44.5)	-	1	900	B30-R4300
i3300, BBP33	Fig. 2	B33-137-7425	B-7425	White	2.000 (50.8)	1.000 (25.4)	-	1	1500	B30-R4300

Microscope Slide Labels (B-481)

- StainerBondz™ polyester material is designed to identify slides and to resist exposure to harsh chemicals during the slide-staining process
- Performs well in stains such as hematoxylin and eosin
- Extreme chemical resistance withstands the rigors of typical deparaffinization, including ethanol, xylene and H&E staining processes

Service temp: -112° F to 266° F
Agency approvals:  RoHS




Figure 2




Figure 25



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-195-481	B-481	White	0.900 (22.9)	0.375 (9.5)	1	3000	B30-R6400
i3300, BBP33	Fig. 2	B33-194-481	B-481	White	0.900 (22.9)	0.750 (19.1)	1	2000	B30-R6400
i3300, BBP33	Fig. 25	B33-141-481	B-481	White	0.900 (22.9)	0.900 (22.9)	2	1500	B30-R6400

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Dissolvable Paper Labels (B-403)

- Designed for temporary applications where easy removal, re-identification or waste reduction are valued
- Ideal for labeling vials, tubes or general glassware, temporary asset tracking, animal housing identification and general use
- Completely dissolves in warm water within 30 seconds, leaving no adhesive residue




Figure 3



Dissolves within 30 seconds leaving no residue.

Service temp: -40° F to 172° F

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
All*	Fig. 3	B30C-1125-403-WT	B-403	White	1.125 (28.6)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-2250-403-WT	B-403	White	2.250 (57.15)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-3000-403-WT	B-403	White	3.000 (76.2)	100 (30.5)	1 (cont.)	B30-R4300
All*	Fig. 3	B30C-4000-403-WT	B-403	White	4.000 (101.6)	100 (30.5)	1 (cont.)	B30-R4300

Well and Microplate Labels (B-490, B-499)

- Designed with a short height and long width to fit the necessary information on the plate
- B-490 Polyester: White FreezerBondz label ideal for flat frozen surfaces
- B-499 Nylon Cloth: Thick white nylon cloth with permanent adhesive provides easy handling and conformability
- B-7425 Polypropylene: Moderate chemical resistance, ideal for labeling dry, room temperature specimen containers




Figure 2



B-490: Service temp: -320° F to 366° F Agency approvals: RoHS
 B-499: Service temp: -40° F to 194° F Agency approvals: RoHS
 B-7425: Service temp: -112° F to 158° F Agency approvals: RoHS

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-151-490	B-490	White	2.000 (50.8)	0.250 (6.4)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-151-499	B-499	White	2.000 (50.8)	0.250 (6.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-151-7425	B-499	White	2.000 (50.8)	0.250 (6.4)	1	2000	B30-R4300

Tissue Cassette Labels (B-482)

- White polyester label with superior resistance to tissue processing chemicals and embedding procedures
- Use with the BSP™31 Label Attachment system for tissue cassette identification




Figure 2



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-199-482	B-482	White	1.050 (26.7)	0.250 (6.4)	1	3000	B30-R6400
i3300, BBP33	Fig. 2	B33-213-482	B-482	White	1.050 (26.7)	0.313 (8)	1	3000	B30-R6400

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

General Identification for Laboratory Storage, Equipment and Safety Labels (B-499, B-595, B-7569)

- Super-strong adhesives and colors ideal for marking laboratory equipment, containers, hoses and lab storage cabinets, shelves and drawers
- GHS labels available for marking chemicals in the lab and shipment boxes when collaborating with other labs
- Pre-printed sign header labels make your safety and housekeeping reminders stand out and stay put

B-499: Service temp: -40° F to 193° F Agency approvals:
 B-595: Service temp: -40° F to 180° F Agency approvals:
 B-7569: Service temp: -4° F to 167° F




Figure 1




Figure 2




Figure 3




Figure 70



Fits Printers	Figure	Catalog #	B#	Color /Legend	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon Cloth - Permanent adhesive (B-499):									
i3300, BBP33	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	4	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	4	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-126-499	B-499	White	0.900 (22.9)	0.500 (12.7)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	1	1100	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	2.000 (50.8)	0.250 (6.4)	1	1500	B30-R6000
Indoor / Outdoor Vinyl (B-595):									
All*	Fig. 3	B30C-500-595-WT	B-595	White	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-WT	B-595	White	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-YL	B-595	Yellow	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-1125-595-YL	B-595	Yellow	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000
All*	Fig. 3	B30C-500-595-RD	B-595	Red	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-RD	B-595	Red	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-BL	B-595	Blue	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-BL	B-595	Blue	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-500-595-GN	B-595	Green	0.500 (12.7)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
All*	Fig. 3	B30C-1125-595-GN	B-595	Green	1.125 (28.6)	100 ft. (30.5 m)	-	1 roll (cont.)	B30-R10000-WT
Pre-Printed Pre-Cut Blank Sign Headers (B-595):									
All*	Fig. 70	B30-241-595-ANSIDA	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIDA	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSINO	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSINO	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Pre-Printed GHS / CLP Chemical (B-7569):									
All*	L4B Diamond + Text	B30-260-7569-CLP4B	B-7569		2.170 (55.0)	3.350 (85.0)	1	340	B30-R10000
		B30-261-7569-CLP4B	B-7569		2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
All*	L4C Diamond + Text	B30-18-7569-CLP4C	B-7569		1.000 (25.4)	3.000 (76.2)	1	1000	B30-R10000

Additional sizes and colors available for: B-595 on page 40; sign headers on page 44; GHS labels on page 42.
 U.S. Patent No. 5,823,689; 6,570,602 on B-595 vinyl. Additional patents pending.

*All supplies listed are compatible with the following printers unless otherwise noted:
 BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30-Series Supply Kits

BradyID.com/s36

B30-Series Supply Kits

for BradyPrinter S3000, S3100, i3300,
BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers

Get started right and save a little, too, with a Brady supply starter kit. These kits contain the most commonly used labels and ribbons to ensure you have what you need to get going on your projects.



Basic Supply Starter Kit

Kit includes:

- (1) B30C-4000-595-YL - 4 in. yellow vinyl
- (1) B30C-4000-595-WT - 4 in. white vinyl
- (1) B30C-2250-595-RD - 2.25 in. red vinyl
- (1) B30-R10000 - Black print ribbon
- (1) B30-R10000-WT - White print ribbon

Catalog #	Description
146069	Basic Supply Starter Kit - Small

Printer sold separately.



Gauge Label Supply Kit for BBP37 Printer*

Kit includes:

- (2) B30C-4000-595-WT - 4 in. white vinyl
- (2) B30-R10000-GR-8 - Green / red paneled print ribbon; 8 in. panel length

Catalog #	Description
146070	Gauge Label Supply Kit - Small

* BBP37 printer required to cut gauge label. Printer sold separately.



Arc Flash Supply Kit

Large kit includes:


- (2) B30-25-595-ANSIWA - 4 in. x 6 in. B-595 ANSI warning header
- (1) B30-241-595-ANSIWA - 2.25 in. x 3 in. B-595 ANSI warning header
- (1) B30EP-174-593-WT - 1 in. x 4 in. B-593 white raised panel label
- (1) B30C-2250-595-OR - 2.25 in. B-595 orange vinyl
- (3) B30-R10000 - Black print ribbon

Small kit includes:

- (2) B30-25-595-ANSIWA - 4 in. x 6 in. ANSI warning header
- (1) B30-R10000 - Black print ribbon

Catalog #	Description
142061	Arc Flash Supply Kit - Large
146071	Arc Flash Supply Kit - Small
S3100W-ARC-KIT	BradyPrinter S3100 w/ Large Arc Flash Supply Kit

Printer sold separately unless otherwise noted.



GHS Supply Kit

Large kit includes:

- (1) B30-262-7569-CLP4B - 4 in. x 6 in. four-diamond GHS label
- (2) B30-261-7569-CLP4B - 3 in. x 4 in. four-diamond GHS label
- (1) B30-260-7569-CLP4B - 2 in. x 3 in. four-diamond GHS label
- (3) B30-R10000 - Black print ribbon

Small kit includes:

- (2) B30-262-7569-CLP4B - 4 in. x 6 in. four-diamond GHS label
- (1) B30-R10000 - Black print ribbon

Catalog #	Description
146072	GHS Supply Kit - Large
146073	GHS Supply Kit - Small
S3100W-GHS-KIT	BradyPrinter S3100 w/ Large GHS Supply Kit

Printer sold separately unless otherwise noted.



Safety and Compliance Supply Kit

Kit includes:

- (1) B30-25-595-ANSIDA - 4 in. x 6 in. B-595 ANSI danger header
- (1) B30-25-595-ANSIWA - 4 in. x 6 in. B-595 ANSI warning header
- (1) B30-25-595-ANSICA - 4 in. x 6 in. B-595 ANSI caution header
- (1) B30-25-595-ANSINO - 4 in. x 6 in. B-595 ANSI notice header
- (1) B30C-4000-526 - 4 in. B-526 photoluminescent
- (1) B30-263-595-NFPA - 4 in. x 6 in. B-595 NFPA right to know diamond
- (2) B30-R10000 - Black print ribbon
- (1) B30-R10000-RD - Red print ribbon

Catalog #	Description
142062	Safety Supply Kit - Large
S3100W-SAFE-KIT	BradyPrinter S3100 w/ Safety Supply Kit

Printer sold separately unless otherwise noted.



Lean / 5S Visual Workplace Supply Kit

Kit includes:

- (1) B30C-4000-595-WT - 4 in. B-595 white vinyl
- (1) B30C-2250-595-WT - 2.25 in. B-595 white vinyl
- (1) B30C-4000-595-YL - 4 in. B-595 yellow vinyl
- (1) B30C-2250-595-YL - 2.25 in. B-595 yellow vinyl
- (1) B30C-2250-581-WT - 2.25 in. B-581 repositionable vinyl
- (1) B30C-1125-581-WT - 1.125 in. B-581 repositionable vinyl
- (1) B30C-2500-509-WT - 2.25 in. magnetic vinyl
- (1) 142133 - Blank valve tag variety pack
- (1) B30-219-595-BLNKWT - Die-cut labels for valve tags
- (1) B30-25-595-ANSIWA - 4 in. x 6 in. B-595 caution header
- (2) B30-R10000 - Black print ribbon
- (1) B30-R10000-RD - Red print ribbon
- (1) B30-R10000-GN - Green print ribbon
- (1) B30-R10000-BL - Blue print ribbon

Catalog #	Description
142063	Lean / 5S Supply Kit - Large
S3100W-LEAN-KIT	BradyPrinter S3100 w/ Lean / 5S Supply Kit

Printer sold separately unless otherwise noted.



Pipe Identification Supply Kit

Kit includes:

- (1) B30C-4000-595-YL - 4 in. B-595 yellow vinyl
- (1) B30C-2250-595-YL - 2.25 in. B-595 yellow vinyl
- (1) B30C-1125-595-YL - 1.125 in. B-595 yellow vinyl
- (1) B30C-4000-595-GN - 4 in. B-595 green vinyl
- (1) B30C-2250-595-GN - 2.25 in. B-595 green vinyl
- (1) B30C-1125-595-GN - 1.125 in. B-595 green vinyl
- (1) B30C-1125-595-BL - 1.125 in. B-595 blue vinyl
- (1) B30C-2250-595-RD - 2.25 in. B-595 red vinyl
- (1) B30C-1125-595-RD - 1.125 in. B-595 red vinyl
- (1) B30EP-174-593-BK - 1 in. x 4 in. B-593 black raised panel
- (1) 142133 - Blank valve tag variety pack
- (1) B30-242-595-BLNKWT - Small die-cut labels for valve tags
- (3) B30-R10000 - Black print ribbon
- (2) B30-R10000-WT - White print ribbon

Catalog #	Description
142064	Pipe ID Supply Kit - Large
S3100W-PIPE-KIT	BradyPrinter S3100 w/ Pipe ID Supply Kit

Printer sold separately unless otherwise noted.



General Industrial Supply Kit

Kit includes:

- (1) B30C-4000-595-WT - 4 in. B-595 white
- (1) B30C-2250-595-WT - 2.25 in. B-595 white
- (1) B30C-1125-595-WT - 1.125 in. B-595 white vinyl
- (1) B30C-4000-595-YL - 4 in. B-595 yellow vinyl
- (1) B30C-2250-595-YL - 2.25 in. B-595 yellow vinyl
- (1) B30C-1125-595-YL - 1.125 in. B-595 yellow vinyl
- (1) B30EP-177-593-BK - 2.5 in. x 3 in. B-593 black raised panel
- (1) B30-25-595-ANSIDA - 4 in. x 6 in. B-595 ANSI danger header
- (1) B30-25-595-ANSICA - 4 in. x 6 in. B-595 ANSI caution header
- (1) B30C-2250-584-YL - 2.25 in. Reflective yellow
- (1) B30C-4250-551-WT - 4.25 in. White tag stock
- (2) B30-R10000 - Black print ribbon
- (1) B30-R10000-WT - White print ribbon
- (1) B30-R10000-RD - Red print ribbon

Catalog #	Description
142065	General Industrial Supply Kit - Large
S3100W-GEN-KIT	BradyPrinter S3100 w/ General Industrial Supply Kit

Printer sold separately unless otherwise noted.

B30-Series Print Ribbons

BradyID.com/s36

B30-Series Print Ribbons

for BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers

- Tough, smear-proof ribbons that produce long-lasting printed text and can withstand years in industrial areas and outdoor conditions
- Self-contained cartridges drop straight into printer with a click – no calibrating, threading, wasted feeding and the ink will always be facing the right direction
- Printer notifies user if installed ribbon is not recommended for installed labels



Drop and click print ribbons for 5-second ribbon supply changes

Single-Color Print Ribbons

- Solid color ribbons for printing a single color onto a label
- Can be used for printing multi-color labels on BBP35 or BBP37 printers if a paneled multi-color ribbon is not on hand
- All ribbons 4.330 in. x 200 ft. (101.9 mm x 60.9 m)

Fits Printers	Catalog #	Color
All*	B30-R10000	Black
All*	B30-R6000	Black
All*	B30-R6200	Black
All*	B30-R6400	Black
All*	B30-R6600	Black
All*	B30-R4300	Black
All*	B30-R10000-WT	White
All*	B30-R4400-WT	White
All*	B30-R6700-WT	White*
All*	B30-R4500-SV	Silver*

Fits Printers	Catalog #	Color
All*	B30-R10000-RD	Red
All*	B30-R10000-GN	Green
All*	B30-R10000-BL	Blue
All*	B30-R10000-YL	Yellow*
All*	B30-R10000-YL2	Yellow*
All*	B30-R10000-OR	Orange
All*	B30-R10000-MA	Magenta
All*	B30-R10000-PRCCY	Process Cyan**
All*	B30-R10000-PRCYEL	Process Yellow**
All*	B30-R10000-PRCMAG	Process Magenta**



* B30-R4500-SV ribbon for use with B-342 black Permasleeves only; B30-R6700-WT ribbon for use with B-345 black Permasleeves only.

** B30-R10000-YL for printing yellow onto white. B30-R10000-YL2 for printing yellow onto other colors of B-595.

*** Process ribbons print a much lighter shade. They are designed to be used with other process ribbons and black ribbon to lay down a dot pattern for printing blended colors and process color objects with the BBP35/37.

Multi-Color Paneled Print Ribbons for BBP35 and BBP37

- Ribbons have 2- or 4-color panels for printing multiple colors onto a label
- Print multiple colors without having to swap in multiple ribbons



Two-color print ribbons

Fits Printers	Catalog #	Color	Panel Size Inch (mm)	Length Feet (m)
8 inch panel length. Typical yield: 100 panel sets per roll				
BBP35, 37 Only	B30-R10000-KR-8	Black and Red	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KY-8	Black and Yellow	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KB-8	Black and Blue	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KO-8	Black and Orange	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KG-8	Black and Green	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-GR-8	Green and Red	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
16 inch panel length. Typical yield: 60 panel sets per roll				
BBP35, 37 Only	B30-R10000-KR-16	Black and Red	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KY-16	Black and Yellow	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KB-16	Black and Blue	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KO-16	Black and Orange	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KG-16	Black and Green	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-RB-16	Red and Blue	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)

Four-color print ribbons

Fits Printers	Catalog #	Color	Panel Size Inch (mm)	Length Feet (m)
8 inch panel length. Typical yield: 50 panel sets per roll				
BBP35, 37 Only	B30-R10000-KRGB-8	Black, Red, Green and Blue	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYG-8	Black, Red, Yellow and Green	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYB-8	Black, Red, Yellow and Blue	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRBO-8	Black, Red, Blue and Orange	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-CMYK-8	Process Cyan, Magenta, Yellow, Black**	4.330 x 8.000 (101.9 x 203.2) panels	200 ft. (60.9 m)
16 inch panel length. Typical yield: 30 panel sets per roll				
BBP35, 37 Only	B30-R10000-KRGB-16	Black, Red, Green and Blue	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-KRYB-16	Black, Red, Yellow and Blue	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)
BBP35, 37 Only	B30-R10000-CMYK-16	Process Cyan, Magenta, Yellow, Black**	4.330 x 16.000 (101.9 x 604.4) panels	200 ft. (60.9 m)

** Process ribbons print a much lighter shade. They are designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing blended colors and process color objects with the BBP35 and BBP37 printers.

B30-Series Print Ribbons

BradyID.com/s36

Print ribbon and label material compatibility

B-# Material		B30-R4300 (Black)	B30-R6000 (Black)	B30-R6200 (Black)	B30-R6400 (Black)	B30-R6600 (Black)	B30-R10000 (Black)	B30-R4500-SV* (Silver)	B30-R4400-WT (White)	B30-R6700-WT* (White)	B30-R10000-WT (White)	B30-R10000-YL (Yellow)	B30-R10000-YL2 (Yellow)	B30-R10000 (Colors)
B-342	Polyolefin	●	-	-	-	-	-	●*	-	-	-	-	-	-
B-344	Polyolefin	-	-	-	-	●	-	-	●*	-	-	-	-	-
B-345	Polyolefin	-	●	-	-	-	-	-	●	-	-	-	-	-
B-403	Paper	●	-	-	-	-	-	-	-	-	-	-	-	-
B-422	Polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-423	Glossy white polyester	-	●	●	-	-	-	-	-	-	-	-	-	-
B-424	Matte white paper	●	-	-	-	-	-	-	-	-	-	-	-	-
B-425	Polypropylene	●	-	-	●	-	-	-	-	-	-	-	-	-
B-427	Vinyl	●	-	-	-	-	-	-	-	-	-	-	-	-
B-428	Metallized polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-430	Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-432	Glossy clear polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-434	Glossy metallized polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-437	Polyvinylfluoride	●	-	-	-	-	-	-	-	-	-	-	-	-
B-438	Tamper evident metallized polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-461	Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-472	Polyimide	●	-	-	-	-	-	-	-	-	-	-	-	-
B-480	Metallized polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-481	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-482	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-483	Glossy white polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-483	Toughstripe® floor marking tape	-	●	-	-	-	-	-	●	-	-	-	-	-
B-484A	Glossy white polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-486	Matte metallized polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-489	Matte white polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-490	Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-492	Polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-494	Color polyester	-	-	-	●	-	-	-	-	-	-	-	-	-
B-498	Cloth	-	-	●	-	-	-	-	-	-	-	-	-	-
B-499	Nylon	●	●	-	-	-	-	-	-	-	-	-	-	-
B-509	Printable magnetic	-	-	-	-	-	●	-	-	-	-	-	-	●*
B-526	Photoluminescent polyester	-	-	-	-	-	●	-	-	-	-	-	-	●*
B-549	Cold temperature polyester	-	-	-	-	-	●	-	-	-	●	-	-	●*
B-551	Non-adhesive tag	-	-	-	-	-	●	-	-	-	-	-	-	●*
B-565	Metallized polyester	-	-	-	-	-	●	-	-	-	-	-	-	-
B-569	Low-halide polyester	-	-	-	-	-	●	-	-	-	●	-	-	●*
B-581	Repositionable vinyl	-	-	-	-	-	●	-	-	-	●	-	-	●*
B-584	Retro reflective	-	-	-	-	-	●	-	-	-	-	-	-	●*
B-593	Raised panel polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-595	Outdoor vinyl	-	-	-	-	-	●	-	-	-	●	●**	●**	●*
B-717	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-718	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-719	Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-724	Matte amber polyimide	●	-	-	-	-	-	-	-	-	-	-	-	-
B-727	Glossy white polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-854	Toughwash® metal detectable	-	●	-	-	-	-	-	-	-	-	-	-	-
B-855	Toughwash	-	●	-	-	-	-	-	-	-	-	-	-	-
B-7425	Polypropylene	-	-	-	●	-	-	-	-	-	-	-	-	-
B-7425-AC	Polypropylene	-	-	-	●	-	-	-	-	-	-	-	-	-
B-7569	Vinyl film	-	-	-	-	●	-	-	-	-	-	-	-	-
B-7641	Polyolefin	●	●	-	-	●	-	-	-	-	-	-	-	-
B-7642	Polyolefin	●	-	-	●	-	-	-	-	-	-	-	-	-
B-7643	Polyurethane	-	●	-	-	-	-	-	●	-	-	-	-	-

Refer to the corresponding Tech Data Sheets for complete material information at BradyID.com/techdata.

* B30-R4500-SV ribbon for use with B-342 black PermaSleeves® only; B30-R6700-WT ribbon for use with B-345 black PermaSleeves® only.

**Colored ribbons optimized for use on white material. Test use on other material colors for suitability to your application.

***Use B30-R10000-YL for printing yellow onto white. Use B30-R10000-YL2 for printing yellow onto other colors of B-595.

Benchtop Printers

B30 / B33 Series

BBP®85 Sign and Label Printer

BradyID.com/s36

Benchtop Printers

BBP85



BRADY360
5 YEAR
WARRANTY

Learn more at
BradyID.com/bbp85

Printer at-a-glance

- Large output up to 10 in. wide
- Single- and multi-color printing
- PC-connect or standalone printing
- Touchscreen label creation
- 125 parts, 5 materials

Printing supplies

BBP85 label rolls page 78
BBP85 print ribbons page 83

BBP®85 SIGN & LABEL PRINTER

**There's big and bold.
Then there's big and bold
from Brady.**

The BBP85 Sign and Label Printer allows you to create extra-large 10 inch labels in multiple colors, and it has an easier-than-ever interface that anyone on your team can use. No more complex, tedious design steps. Now you can just walk up and print – anyone can do it.

Big Output. Little Fuss.

Create custom signs and labels right now. This printer has our fastest, easiest operating system, so anyone on your team can design visuals with little to no training. The ideal printer for multi-user lean / 5S and kaizen labeling events.

- Unmistakably large visuals up to 10 in. wide
- Just walk up and print – it really is that easy
- Simple touchscreen interface for standalone use, including label design apps to quickly create safety signs, pipe markers, GHS, arc flash, right-to-know labels and more
- Connect to your PC to print labels created through Brady Workstation apps
- USB port for importing files, fonts and graphics

Catalog #	Description
BBP85	BBP85 Sign and Label Printer*
B85-DC	BBP85 Printer Dust Cover
STYLUS-3PK	Replacement Stylus Pens (3 per pack)

* Printer ships with documentation CD, printer driver CD, power cord, USB cord, Quick Start Guide and cleaning kit.



Big, bold and better than ever



Large signs
up to 10 in. wide



Custom signs
on demand



Equipment ID



Low light applications



GHS labels



Pipe marking

BBP®85 Sign and Label Printer

BradyID.com/s36

Printer specifications

Overview	10 in. standalone and PC-connect printer for SFID with multi-color printing. Particularly popular for any large labeling needs. The ultimate in easy and accessible with multiple colors for larger output
Applications	Larger output of equipment labels, GHS labels, safety signs and multi-color labels
Label materials	Extremely aggressive 8-10 year outdoor vinyl with high tack and chemical resistance, plus reflective, 10-hour glow-in-the-dark and polyester.
Label formats	Continuous tapes, pre-printed and blank die-cut labels
Print technology	Thermal transfer
Print resolution	300 dpi
Print speed	1 in./sec.
Media widths	4 to 10 in.
Min. label dimension	4 in.
Color printing capabilities	Monocolor and multi-color printing
Auto cut-off	Yes
X-Y plotter cutting (cutout shapes / text)	No
PC-connect or standalone operation	Standalone and PC-connect printing
Connectivity options	Standard: USB, Ethernet Optional: Wi-Fi, Wi-Fi Direct
Compatible software	Brady Workstation Apps
Compatible materials	B85-series and PowerMark materials
Compatible ribbons	B85-series and Powermark ribbons
Calibration required	No (no waste)
Label creation and set-up	Automatic (printer or PC software reads data on chip and automatically sets up label size, color, fonts, etc.)
Ribbon and label roll installation	Labels: Supplied in cartridge, drops into place, 15-second changeover Ribbon: Supplied in cartridge, snaps into place, 5-second changeover
Warranty	5 years

* Patent No. 8,542,155; 8,783,983.
Additional patents pending.



Brady Workstation Safety and Facility ID Suite

Brady Workstation has revolutionized how you design and print labels from your PC. When paired with the high-performance printing capabilities of a Brady printer, you get intuitive label set up for simple, efficient and flexible label creation.

This suite features:

- A collection of applications for creating the custom signs, labels and pipe markers you need to add visual safety guidance to your facility
- The ability to serialize and import your data onto the labels
- Real-time information about the label material installed, enabling easy label set up
- Built-in regulations, standards, pictograms, common phrases, data importation guidance, help functions and more

▶ Learn more on page 176 or download a free trial at Workstation.BradylD.com

Brady360® 5-year Warranty

We stand behind our products and have strengthened our commitment to you with a **5-year printer warranty standard and free of charge** on our benchtop printer models.* With our team of certified tech support and repair technicians, you can rest easy knowing you have the support you need, every step of the way.

*Excludes repairs due to negligence. Excludes Wraptr™, BradyJet and portable models. For full coverage details and restrictions, visit BradyID.com/brady360



Benchtop Printers

BBP85

BBP®85 Label Materials

BradyID.com/s36

Indoor / Outdoor Grade Vinyl Tape (B-595)

- Durable, low-shrink vinyl with our most aggressive adhesive and 8-10 year outdoor durability
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks and wood, textured plastics, cast-iron and paper-jacketed pipes, powder-coated surfaces)

Service temp: -40° F to 180° F; Application temp: 0° F to 180° F
Average outdoor durability: 8-10 year outdoor vinyl label durability




Figure 33



Benchtop Printers

BBP85

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP85, PMK	Fig. 33	13538	B-595	White	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13549	B-595	White	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13651	B-595	White	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13551	B-595	White	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13562	B-595	White	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13539	B-595	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13550	B-595	Yellow	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13652	B-595	Yellow	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13552	B-595	Yellow	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13563	B-595	Yellow	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13540	B-595	Red	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13601	B-595	Red	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13654	B-595	Red	7.000 (177.8)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13553	B-595	Red	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13610	B-595	Red	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13541	B-595	Blue	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13602	B-595	Blue	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13656	B-595	Blue	7.000 (177.8)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13554	B-595	Blue	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13611	B-595	Blue	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13542	B-595	Green	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13603	B-595	Green	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13655	B-595	Green	7.000 (177.8)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13555	B-595	Green	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13612	B-595	Green	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13543	B-595	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13604	B-595	Orange	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13653	B-595	Orange	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13556	B-595	Orange	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13613	B-595	Orange	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13544	B-595	Black	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13605	B-595	Black	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13557	B-595	Black	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13614	B-595	Black	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13545	B-595	Gold	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13606	B-595	Gold	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13558	B-595	Gold	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13615	B-595	Gold	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13546	B-595	Gray	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13607	B-595	Gray	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13559	B-595	Gray	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13616	B-595	Gray	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13547	B-595	Brown	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13608	B-595	Brown	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13560	B-595	Brown	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13617	B-595	Brown	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13548	B-595	Purple	4.000 (101.6)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13609	B-595	Purple	6.000 (152.4)	50 (15.2)	1 roll (cont)	13513
BBP85, PMK	Fig. 33	13561	B-595	Purple	8.000 (203.2)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	13618	B-595	Purple	10.000 (254.0)	50 (15.2)	1 roll (cont)	13512
BBP85, PMK	Fig. 33	59529	B-595	Clear	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	59530	B-595	Clear	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	59531	B-595	Clear	8.000 (203.2)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	59532	B-595	Clear	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510

U.S. Patent No. 5,318,370; 5,823,689; 6,570,602. Additional patents pending.

Low-Halide Polyester (B-569)

- For labeling stainless steel and smooth surfaces
- Low-halide content for labeling stainless steel surfaces
- Applies best to very smooth surfaces and is ideal for mounting to rigid panels

Service temp: -40° F to 212° F; Application temp: 0° F to 212° F
Average outdoor durability: 3-5 years




Figure 33




Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP85, PMK	Fig. 33	13565	B-569	White	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13569	B-569	White	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13573	B-569	White	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13577	B-569	White	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13566	B-569	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13570	B-569	Yellow	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13574	B-569	Yellow	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13578	B-569	Yellow	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13567	B-569	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13571	B-569	Orange	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13575	B-569	Orange	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13579	B-569	Orange	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	99167	B-569	Ochre	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	99168	B-569	Ochre	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	99169	B-569	Ochre	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	99170	B-569	Ochre	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13564	B-569	Clear	4.000 (101.6)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13568	B-569	Clear	6.000 (152.4)	50 (15.2)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13572	B-569	Clear	7.000 (177.8)	50 (15.2)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13576	B-569	Clear	10.000 (254.0)	50 (15.2)	1 roll (cont)	13510

PowerMark™ Label Maker Materials

The BBP85 printer accepts many of the same materials that the PowerMark. Simply look for "BBP85" or "A" on the supply roll's label to verify compatibility with both models.

Questions?

Call Brady Tech Support at 1-800-643-8766.

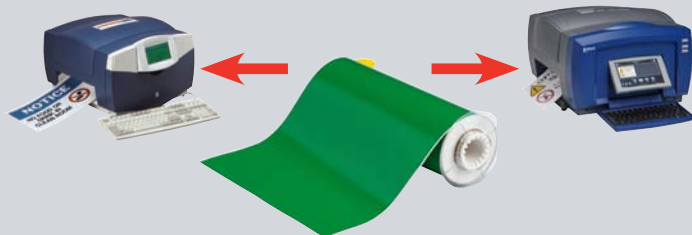

BBP®85 Label Materials

BradyID.com/s36

Pre-Printed GHS / CLP Chemical Labels (B-7569)

- For GHS and hazard communication labeling
- Blank labels with pre-printed red diamonds save time during label printing
- 6 diamond layouts that match templates in Brady Workstation App and standalone printer app
- Indoor / outdoor vinyl withstands exposure to moisture, chemicals and handling

Service temp: -4° F to 180° F; Application temp: 50° F to 180° F
Average outdoor durability: 3-5 years



Fits Printers	Catalog #	B#	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP85	130766	B-7569		4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130772	B-7569		6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130767	B-7569		4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130773	B-7569		6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130768	B-7569		4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130774	B-7569		6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130769	B-7569		4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130775	B-7569		6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130770	B-7569		4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130776	B-7569		6.100 (154.9)	8.300 (210.8)	1	70	13510
BBP85	130771	B-7569		4.100 (104.1)	6.100 (154.9)	1	90	13511
BBP85	130777	B-7569		6.100 (154.9)	8.300 (210.8)	1	70	13510

Pre-Printed Pre-Cut Blank Sign Headers (B-595, B-7569)

- For creating arc flash and safety warning labels in seconds
- Create custom, colorful safety labels using only a black ribbon
- Meet NFPA 70E, OSHA 1910.145 and ASME / ANSI Z535 standards
- Indoor / outdoor grade material conforms to rough, highly textured, and difficult to adhere to surfaces

B-595 vinyl: Service temp: -40° F to 180° F; Application temp: 0° F to 180° F
Average outdoor durability: 8-10 years outdoor vinyl durability

B-7569 vinyl: Service temp: -4° F to 167° F; Application temp: 50° F to 167° F
Average outdoor durability: Up to 3 years vinyl durability




Figure 70




Figure 82



Fits Printers	Figure	Catalog #	B#	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Roll	Rec. Ribbon
BBP85	Fig. 70	140886	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130750	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130749	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140887	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130753	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130752	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140888	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130756	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130755	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140889	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130759	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130758	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140885	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130762	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130761	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 70	140890	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 70	130765	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 70	130764	B-595		4.000 (101.6)	6.000 (152.4)	95	13511
BBP85	Fig. 82	140883	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 82	132393	B-595		7.000 (177.8)	10.000 (254.0)	60	13510
BBP85	Fig. 82	140884	B-7569		10.000 (254.0)	14.000 (355.6)	40	13510
BBP85	Fig. 82	132395	B-595		7.000 (177.8)	10.000 (254.0)	60	13510

Creating On-Demand Rigid Signs

Rigid Sign Blanks

Create your own rigid signs using printed output from your Brady printer and rigid sign panels.

Three mounding techniques to choose from:

- Mount label to a rigid sign panel using the label's pressure sensitive adhesive
- Use the BLS1255 Laminating System to laminate output to a rigid sign panel
- Mount label behind a clear acrylic sign panel using the panel's included pressure sensitive adhesive



Aluminum panels

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
146083	Alum.	Wht	2.500	6.260	10
146113	Alum.	Wht	2.500	10.250	10
13629	Alum.	Wht	4.250	6.250	10
106461	Alum.	Wht	4.250	10.250	10
146082	Alum.	Wht	4.250	14.250	10
13632	Alum.	Wht	7.250	10.250	10
106460	Alum.	Wht	7.630	10.380	10
106462	Alum.	Wht	10.250	10.250	10
13635	Alum.	Wht	10.250	14.250	10
146116	Alum.	Ylw	2.500	6.260	10
146117	Alum.	Ylw	2.500	10.250	10
13630	Alum.	Ylw	4.250	6.250	10
146114	Alum.	Ylw	4.250	10.250	10
146115	Alum.	Ylw	4.250	14.250	10
13633	Alum.	Ylw	7.625	10.375	10
13636	Alum.	Ylw	10.250	14.250	10
13631	Alum.	Org	4.250	6.250	10
13634	Alum.	Org	7.625	10.375	10
15Y885	Alum.	Org	10.250	14.250	10

Plastic panels

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
146076	Plastic	Wht	2.500	6.250	10
146077	Plastic	Wht	2.500	10.250	10
13620	Plastic	Wht	4.250	6.250	10
146074	Plastic	Wht	4.250	10.250	10
146075	Plastic	Wht	4.250	14.250	10
13623	Plastic	Wht	7.630	10.380	10
146080	Plastic	Ylw	2.500	6.250	10
146081	Plastic	Ylw	2.500	10.250	10
13621	Plastic	Ylw	4.250	6.250	10
146078	Plastic	Ylw	4.250	10.250	10
146079	Plastic	Ylw	4.250	14.250	10
13622	Plastic	Org	4.250	6.250	10
13625	Plastic	Org	7.630	10.380	10
13628	Plastic	Org	10.250	14.250	10

Clear acrylic panels

Includes pressure sensitive adhesive backing to mount output behind the clear panel — protecting the graphics

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
13638	Acrylic	Clear	4.000	6.000	10
106464	Acrylic	Clear	4.250	10.250	10
13639	Acrylic	Clear	7.250	10.000	10
106463	Acrylic	Clear	7.250	10.250	10
13640	Acrylic	Clear	10.000	14.000	10
106465	Acrylic	Clear	10.25 in.	10.25 in.	10

BLS1255 Laminating System

BLS1255 laminator enables you to quickly and easily make custom rigid signs for your facility

- Mount signs to rigid panels to create signs for your facility
- Fast and easy to use
- No heat or electricity needed
- Laminate documents up to 12 in. wide



Catalog #	Description
105038	BLS1255 Laminating System
105041	12 in. x 50 ft. Double-Sided Polyester Overlamine



Laminates documents up to 12 in. wide

BBP®85 Label Materials

BradyID.com/s36

Pre-Printed Right-To-Know Chemical Labels (B-595)

- For quickly creating NFPA and color bar labels
- Blank die-cut labels pre-printed with chemical diamonds and color bars
- Indoor / outdoor grade material withstands exposure to moisture, chemicals and handling
- Allows printer to produce 5-color chemical labels in a single print pass

Service temp: -40° F to 180° F; Application temp: 0° F to 180° F
Average outdoor durability: 8 to 10 years outdoor vinyl label durability



Fits Printers	Catalog #	B#	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP85	130808	B-595	 Diamond + text	4.000 (101.6)	6.000 (152.4)	1	95	13511
BBP85	130809	B-595	 Diamond + text	7.000 (177.8)	10.000 (254.0)	1	60	13510
BBP85	130810	B-595	 Diamond only	6.000 (152.4)	6.000 (152.4)	1	95	13511
BBP85	130811	B-595	 Color bar + text	4.000 (101.6)	6.000 (152.4)	1	95	13511
BBP85	130812	B-595	 Color bar + text	7.000 (177.8)	10.000 (254.0)	1	60	13510


Retro Reflective Tape (B-584)

- For highly reflective identification that shines back brightly when struck by light
- Ideal for labeling outdoor metal utility poles, pedestals, jobsite equipment and roof-top equipment especially in low light

Service temp: -40° F to 158° F; Average outdoor durability: 4 to 6 years
Application temp: 0° F to 158° F (yellow and orange), 50° F to 158° F (silver)



Figure 33



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP85, PMK	Fig. 33	13580	B-584	Silver	4.000 (101.6)	33 (10.0)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13585	B-584	Silver	7.000 (177.8)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13590	B-584	Silver	10.000 (254.0)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	51584	B-584	Yellow	4.000 (101.6)	33 (10.0)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	51585	B-584	Yellow	7.000 (177.8)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	51586	B-584	Yellow	10.000 (254.0)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13404	B-584	Orange	4.000 (101.6)	33 (10.0)	1 roll (cont)	13511
BBP85, PMK	Fig. 33	13403	B-584	Orange	7.000 (177.8)	33 (10.0)	1 roll (cont)	13510
BBP85, PMK	Fig. 33	13402	B-584	Orange	10.000 (254.0)	33 (10.0)	1 roll (cont)	13510

BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- Identification that glows in the dark for up to 10 hours
- Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls, and vital equipment controls

Service temp: -40° F to 140° F; Application temp: 40° F to 140° F



Figure 33



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
BBP85, PMK	Fig. 33	105912	B-526	Luminous Green	4.000 (101.6)	33 (10.0)	1 roll (cont)	13511 or 13595
BBP85, PMK	Fig. 33	105913	B-526	Luminous Green	7.000 (177.8)	33 (10.0)	1 roll (cont)	13510 or 13514
BBP85, PMK	Fig. 33	105914	B-526	Luminous Green	10.000 (254.0)	33 (10.0)	1 roll (cont)	13510 or 13514

BBP85 Printer Ribbons

Choose from a variety of heavy-duty, smear-proof ribbons, including single color and multi-color paneled ribbons. These ribbons are uniquely designed with memory cells that communicate information to the BBP85 printer.

Single color print ribbons

Fits Printers	Catalog #	Color	Size Inch (mm)	Length Foot (m)
BBP85, PMK	13511	Black	6.250 (158.0)	200 (60.9)
BBP85, PMK	13510	Black	8.800 (224.0)	200 (60.9)
BBP85, PMK	13513	White	6.250 (158.0)	200 (60.9)
BBP85, PMK	13512	White	8.800 (224.0)	200 (60.9)
BBP85, PMK	13595	Red	6.250 (158.0)	200 (60.9)
BBP85, PMK	13514	Red	8.800 (224.0)	200 (60.9)
BBP85, PMK	13596	Blue	6.250 (158.0)	200 (60.9)
BBP85, PMK	13515	Blue	8.800 (224.0)	200 (60.9)
BBP85, PMK	13597	Green	6.250 (158.0)	200 (60.9)
BBP85, PMK	13516	Green	8.800 (224.0)	200 (60.9)
BBP85, PMK	13598	Magenta	6.250 (158.0)	200 (60.9)
BBP85, PMK	13517	Magenta	8.800 (224.0)	200 (60.9)
BBP85, PMK	13599	Yellow	6.250 (158.0)	200 (60.9)
BBP85, PMK	13518	Yellow	8.800 (224.0)	200 (60.9)
BBP85, PMK	13600	Orange	6.250 (158.0)	200 (60.9)
BBP85, PMK	13519	Orange	8.800 (224.0)	200 (60.9)



Single color print ribbon



Two-color panel print ribbon



Four-color panel print ribbon

Two-color panel print ribbons

Fits Printers	Catalog #	Color	Ribbon Width Inch (mm)	Color Panel Length Inch (mm)	Overall Length Feet (m)	Typical Yield From Ribbon
8 in. panels used to create two color signs up to 8 in. long						
BBP85, PMK	13523	Black and Red	6.250 (158.0)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13522	Black and Red	8.800 (223.5)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13527	Black and Yellow	6.250 (158.0)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13529	Black and Orange	6.250 (158.0)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13704	Black and Green	6.250 (158.0)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
BBP85, PMK	13706	Black and Green	8.800 (223.5)	8.000 (203.2)	200 (60.9)	100 labels (8 in.)
15 in. panels used to create two color signs up to 14 in. long						
BBP85, PMK	13521	Black and Red	6.250 (158.0)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13520	Black and Red	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13525	Black and Blue	6.250 (158.0)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13524	Black and Blue	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13526	Black and Yellow	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13528	Black and Orange	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13705	Black and Green	6.250 (158.0)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)
BBP85, PMK	13707	Black and Green	8.800 (223.5)	15.000 (381.0)	200 (60.9)	60 labels (14 in.)

Four-color panel print ribbons

Fits Printers	Catalog #	Color	Ribbon Width Inch (mm)	Color Panel Length Inch (mm)	Overall Length Feet (m)	Typical Yield From Ribbon
8 in. panels used to create four color signs up to 8 in. long						
BBP85, PMK	13533	Black / Red / Blue / Yellow	6.250 (158.0)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
BBP85, PMK	13532	Black / Red / Blue / Yellow	8.800 (223.5)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
BBP85, PMK	13537	Black / Red / Blue / Green	6.250 (158.0)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
BBP85, PMK	13536	Black / Red / Blue / Green	8.800 (223.5)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
BBP85, PMK	51448	Black / Red / Orange / Blue	8.800 (223.5)	8.000 (203.2)	200 (60.9)	50 labels (8 in.)
15 in. panels used to create four color signs up to 14 in. long						
BBP85, PMK	13531	Black / Red / Blue / Yellow	6.250 (158.0)	15.000 (381.0)	200 (60.9)	30 labels (14 in.)
BBP85, PMK	13530	Black / Red / Blue / Yellow	8.800 (223.5)	15.000 (381.0)	200 (60.9)	30 labels (14 in.)
BBP85, PMK	13535	Black / Red / Blue / Green	6.250 (158.0)	15.000 (381.0)	200 (60.9)	30 labels (14 in.)
BBP85, PMK	13534	Black / Red / Blue / Green	8.800 (223.5)	15.000 (381.0)	200 (60.9)	30 labels (14 in.)

BradyJet J2000 Color Label Printer

BradyID.com/s36

Benchtop Printers



new

BRADY360
1 YEAR
WARRANTY

Learn more at
BradyID.com/J2000

Printer at-a-glance

- Full-color CMYK inkjet printing
- Fast 2.5 in. per second print speeds
- Output up to 4 inches wide
- Small and lightweight at only 7 lbs
- 15 SFID parts, 2 materials

Printing supplies

J20-series materials page 85
J20-series ink cartridge see table

BradyJet J2000

COLOR LABEL PRINTER

Improve productivity and safety with color

Get the impactful color labels you need to create a safer, more efficient workplace. The BradyJet J2000 Color Label Printer is a compact on-demand, mid-volume inkjet solution for creating photo-quality color labels in a single pass, while improving efficiency and saving you money. With the BradyJet J2000 you'll benefit from:

Colorful identification – get more impactful identification with more than 16 million color options for your labels

Quick identification when you need it – efficient printing means you keep your workplace running smoothly

Savings on costs and space – get custom identification in a small footprint without the high cost of outsourced printing



1 ink cartridge =
16 million colors



Catalog #	Description
J2000	BradyJet J2000 Inkjet Label Printer
J2000-BWSSFID	BradyJet J2000 with Brady Workstation SFID Suite
J20-CMY	J20 Ink Cartridge
J20-PAD	J20 Ink Pads
J20-ROLL	J20 material roll for print head alignment

* Printer ships with ink cartridge, material roll for printhead alignment only, USB with drivers and manuals, power cord, USB cable and Quick Start Guide.



Improve productivity and safety



Photo signage



GHS labeling



Pipe marking



Lock labels



Facility tags



And more

J2000

BradyJet J2000 Color Label Printer

BradyID.com/s36

Printer specifications

Description	Full-color, high-resolution ink jet printer for creating photo-quality labels in a single pass, while reducing inventory of labeling supplies. Significantly smaller footprint than BradyJet J5000
Applications	GHS labels, pipe markers, warehouse marking, visual workplace labeling, lean / 5S labels, lockout tags, general ID Industrial ID, laboratory ID
Label material types	Inkjet receptive topcoated vinyl, polyester and tagstock
Types of labels	Continuous and die-cut labels
Print technology	Thermal inkjet
Print resolution	Up to 4800 dpi
Max print width	4 in.
Media widths	1.125 to 4.25 in.
Minimum label size	1.125 in.
Color printing capabilities	Full-color process; up to 16.7 million colors
Auto cut-off	Yes
X-Y plotter cutting	No
PC-connect or standalone operation	PC-connect only
Connectivity options	USB only
Compatible software	Brady Workstation Apps
Compatible materials	J20 series (all)
Calibration required	Required only on initial setup
Ink and label roll installation	Labels: Supplied as rolls, 20-second changeover Ink: Supplied as cartridge, 10-second changeover
Warranty	1 year*

*See BradyID.com/brady360 for coverage details.



Brady Workstation Safety and Facility ID Suite

Brady Workstation has revolutionized how you design and print labels from your PC. When paired with the high-performance printing capabilities of a Brady printer, you get intuitive label set up for simple, efficient and flexible label creation.

This suite features:

- A collection of applications for creating the custom signs, labels and pipe markers you need to add visual safety guidance to your facility
- The ability to serialize and import your data onto the labels
- Real-time information about the label material installed, enabling easy label set up
- Built-in regulations, standards, pictograms, common phrases, data importation guidance, help functions and more

▶ Learn more on page 176 or download a free trial at Workstation.BradyID.com

BradyJet J2000 Label Materials

BradyJet J2000 materials feature a topcoat that enhances the colors and protects your print from smudging and harsh conditions. These labels have been tested to withstand exposure to liquids, alcohol and chemicals, as well as indoor fluorescent and UV lighting.

Die-cut Labels

Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll
Fig. 2	J20-260-2569	B-2569	Polyester	White	2.170 (55.11)	3.350 (85.09)	340
Fig. 2	J20-261-2569	B-2569	Polyester	White	2.950 (74.93)	4.330 (109.98)	270
Fig. 2	J20-262-2569	B-2569	Polyester	White	4.130 (104.90)	6.100 (154.94)	200
Fig. 2	J20-260-2595	B-2595	Vinyl	White	2.170 (55.11)	3.350 (85.09)	340
Fig. 2	J20-261-2595	B-2595	Vinyl	White	2.950 (74.93)	4.330 (109.98)	270
Fig. 2	J20-262-2595	B-2595	Vinyl	White	4.130 (104.90)	6.100 (154.94)	200

Continuous Material

Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll
Fig. 3	J20C-1125-2569	B-2569	Polyester	White	1.125 (28.57)	100 (30.5)	1 cont.
Fig. 3	J20C-2250-2569	B-2569	Polyester	White	2.250 (57.15)	100 (30.5)	1 cont.
Fig. 3	J20C-4000-2569	B-2569	Polyester	White	4.000 (101.6)	100 (30.5)	1 cont.
Fig. 3	J20C-1125-2595	B-2595	Vinyl	White	1.125 (28.57)	100 (30.5)	1 cont.
Fig. 3	J20C-2250-2595	B-2595	Vinyl	White	2.250 (57.15)	100 (30.5)	1 cont.
Fig. 3	J20C-4000-2595	B-2595	Vinyl	White	4.000 (101.6)	100 (30.5)	1 cont.

Non-adhesive Tagstock

Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Tag Length B Inch (mm)	Tags Per Roll
Fig. 13	J20-255-2551	B-2551	Tagstock	White	3.250 (82.55)	5.750 (146.05)	100
Fig. 3	J20C-3250-2551	B-2551	Tagstock	White	3.250 (82.55)	50 ft (15.24 m)	1 cont.
Fig. 3	J20C-2500-2551	B-2551	Tagstock	White	2.500 (63.50)	50 ft (15.24 m)	1 cont.




Figure 2




Figure 3




Figure 13

Benchtop Printers

J2000

BradyJet J5000 Color Label Printer

BradyID.com/s36

Benchtop Printers

J5000



BRADY360
1 YEAR
WARRANTY

Learn more at
BradyID.com/J5000

Printer at-a-glance

- Full-color CMYK inkjet printing
- High-resolution print ideal for photos
- Large output up to 8 in. wide
- PC-connect only
- 18 parts, 2 materials

Printing supplies

J50-series labels rolls.....page 88
J50-series Ink cartridges.....page 88



Easy to load supplies can be changed in seconds.

BradyJet J5000

COLOR LABEL PRINTER

High-resolution, high-speed full-color label creation

Get the impactful color labels you need to create a safer, more efficient workplace. The BradyJet J5000 Color Label Printer is an on-demand, inkjet solution for creating photo-quality color labels for indoor use in a single pass, while reducing your inventory of labeling supplies and material waste.

- 4,800 dpi print resolution for high-resolution clarity and fine detail
- Full-color photo reproduction and wide tonal range allows for labels with photos, graphics, illustrations, text, linear and 2D bar codes
- More than 16 million color possibilities with only 4 ink cartridges
- Large ink cartridges that reduce the amount of changeovers or replacements
- Fast print speeds up to 6 inches per second
- Print up to 5,000 high resolution labels per day, using only the ink and label materials needed to keep waste and inventory down
- Variety of label options with 2 to 8 inch wide continuous and die-cut materials



Catalog #	Description
J5000	BradyJet J5000 Color Label Printer*

* Printer ships with printhead with set-up ink cartridges, set-up CD, USB cable, power cord, Quick Start Guide.

High-resolution and full-color identification throughout your facility



Safety signage



Asset management



Pipe marking



GHS hazcomm



Standard work /
dance chart



Photo signage
and more

BradyJet J5000 Color Label Printer

BradyID.com/s36

Printer specifications

Description	8 in. PC-connect printer with high-resolution, high-speed color label printing. Ideal for creating full-color labels with images, logos, illustrations, barcodes and more. The ultimate in high-resolution printing in all colors
Applications	Arc flash labels (w/ red variables), equipment labels, GHS labels, pipe markers, safety signs and warning labels (multi-color), lean / 5S labels, multi-color labels, lock labels (w/ photos), asset management, department signage, finished goods
Label material types	Inkjet receptive topcoated vinyl and polyester
Types of labels	Continuous and die-cut labels
Print technology	Thermal inkjet
Print resolution	Up to 4800 dpi
Max print width	4 in.
Media widths	2 to 8 in.
Minimum label size	2 in.
Color printing capabilities	Full color process; up to 16.7 million colors
Auto cut-off	Yes
X-Y plotter cutting	No
PC-connect or standalone operation	PC-connect only
Connectivity options	USB, Ethernet and wireless
Compatible software	Brady Workstation Apps
Compatible materials	J50 series (all)
Calibration required	Required only on initial setup
Ink and label roll installation	Labels: Supplied as rolls, 20-second changeover Ink: Supplied as cartridge, 10-second changeover
Warranty	1 year*

*See BradyID.com/brady360 for full coverage details and restrictions.



Brady Workstation Safety and Facility ID Suite

Brady Workstation has revolutionized how you design and print labels from your PC. When paired with the high-performance printing capabilities of a Brady printer, you get intuitive label set up for simple, efficient and flexible label creation.


This suite features:

- A collection of applications for creating the custom signs, labels and pipe markers you need to add visual safety guidance to your facility
- The ability to serialize and import your data onto the labels
- Real-time information about the label material installed, enabling easy label set up
- Built-in regulations, standards, pictograms, common phrases, data importation guidance, help functions and more

Learn more on page 176 or download a free trial at Workstation.BradylD.com

Full-color printing means less material to inventory

Three white BradyJet J5000 label rolls can create the same types of labels as these 14 colored and pre-printed rolls.

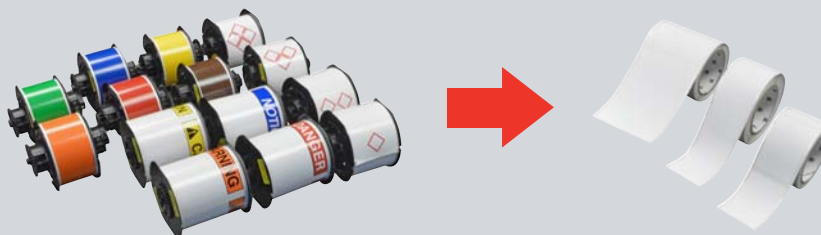

Benchtop Printers

J5000

BradyJet J5000 Label Materials

BradyID.com/s36

BradyJet J5000 Label Materials

BradyJet J5000 label materials feature a topcoat that enhances the colors and label appearance, and protects your print from smudging and harsh conditions. These labels have been tested to withstand exposure to liquids, alcohol and chemicals, as well as indoor fluorescent and UV lighting. Custom sizes of B-2595 and B-2569 available.



Die-cut Labels

Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Labels Per Roll
Fig. 2	J50-260-2595	B-2595	Vinyl	White	3.35 (85.0)	2.17 (55.0)	340
Fig. 2	J50-261-2595	B-2595	Vinyl	White	4.33 (110.0)	2.95 (75.0)	270
Fig. 2	J50-262-2595	B-2595	Vinyl	White	6.10 (155.0)	4.13 (105.0)	200
Fig. 2	J50-267-2595	B-2595	Vinyl	White	8.30 (210.8)	6.10 (154.9)	120
Fig. 2	J50-265-2595	B-2595	Vinyl	White	10.00 (254.0)	7.00 (177.8)	100
Fig. 2	J50-260-2569	B-2569	Polyester	White	3.35 (85.0)	2.17 (55.0)	340
Fig. 2	J50-261-2569	B-2569	Polyester	White	4.33 (110.0)	2.95 (75.0)	270
Fig. 2	J50-262-2569	B-2569	Polyester	White	6.10 (155.0)	4.13 (105.0)	200
Fig. 2	J50-267-2569	B-2569	Polyester	White	8.30 (210.8)	6.10 (154.9)	120
Fig. 2	J50-265-2569	B-2569	Polyester	White	10.00 (254.0)	7.00 (177.8)	100




Figure 2

Continuous Tapes

Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll
Fig. 3	J50C-2250-2595	B-2595	Vinyl	White	2.25 (57.5)	100 (30.5)	1 cont.
Fig. 3	J50C-4000-2595	B-2595	Vinyl	White	4.00 (101.6)	100 (30.5)	1 cont.
Fig. 3	J50C-6000-2595	B-2595	Vinyl	White	6.00 (152.4)	100 (30.5)	1 cont.
Fig. 3	J50C-8000-2595	B-2595	Vinyl	White	8.00 (203.2)	100 (30.5)	1 cont.
Fig. 3	J50C-2250-2569	B-2569	Polyester	White	2.25 (57.5)	100 (30.5)	1 cont.
Fig. 3	J50C-4000-2569	B-2569	Polyester	White	4.00 (101.6)	100 (30.5)	1 cont.
Fig. 3	J50C-6000-2569	B-2569	Polyester	White	6.00 (152.4)	100 (30.5)	1 cont.
Fig. 3	J50C-8000-2569	B-2569	Polyester	White	8.00 (203.2)	100 (30.5)	1 cont.




Figure 3

Non-adhesive Tag Stock

Figure	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Roll Length B Inch (mm)	Tags Per Roll
Fig. 13	J50-255-2551	B-2551	Vinyl Tag	White	3.250 (82.6)	5.750 (146.1)	100




Figure 13

Clear Acrylic Overlamine (B-910)

- Clear acrylic film with permanent adhesive provides improved label durability including outdoor UV resistance up to 3 years
- Hand apply after label is applied to surface
- Overlamine is slightly wider than BradyJet continuous tape

Catalog #	B#	Color	Roll Width Inch (mm)	Roll Length Feet (m)
149259	B-910	Clear	2.75 (69.9)	120 (36.6)
149258	B-910	Clear	4.5 (114.3)	120 (36.6)
149257	B-910	Clear	6.5 (165.1)	120 (36.6)
149260	B-910	Clear	8.5 (215.9)	120 (36.6)



BradyJet J5000 Ink Cartridges

Catalog #	Description
J50-CY	Cyan
J50-MA	Magenta
J50-YL	Yellow
J50-BK	Black — cartridge contains double the volume as colors
J50-CMYK	Multi-pack — 1 each of cyan, magenta, yellow, black cartridges



Creating On-Demand Rigid Signs

Rigid Sign Blanks

Create your own rigid signs using printed output from your Brady printer and rigid sign panels.

Three mounding techniques to choose from:

- Mount label to a rigid sign panel using the label's pressure sensitive adhesive
- Use the BLS1255 Laminating System to laminate output to a rigid sign panel
- Mount label behind a clear acrylic sign panel using the panel's included pressure sensitive adhesive



Aluminum panels

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
146083	Alum.	Wht	2.500	6.260	10
146113	Alum.	Wht	2.500	10.250	10
13629	Alum.	Wht	4.250	6.250	10
106461	Alum.	Wht	4.250	10.250	10
146082	Alum.	Wht	4.250	14.250	10
13632	Alum.	Wht	7.250	10.250	10
106460	Alum.	Wht	7.630	10.380	10
106462	Alum.	Wht	10.250	10.250	10
13635	Alum.	Wht	10.250	14.250	10
146116	Alum.	Ylw	2.500	6.260	10
146117	Alum.	Ylw	2.500	10.250	10
13630	Alum.	Ylw	4.250	6.250	10
146114	Alum.	Ylw	4.250	10.250	10
146115	Alum.	Ylw	4.250	14.250	10
13633	Alum.	Ylw	7.625	10.375	10
13636	Alum.	Ylw	10.250	14.250	10
13631	Alum.	Org	4.250	6.250	10
13634	Alum.	Org	7.625	10.375	10
15Y885	Alum.	Org	10.250	14.250	10

Plastic panels

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
146076	Plastic	Wht	2.500	6.250	10
146077	Plastic	Wht	2.500	10.250	10
13620	Plastic	Wht	4.250	6.250	10
146074	Plastic	Wht	4.250	10.250	10
146075	Plastic	Wht	4.250	14.250	10
13623	Plastic	Wht	7.630	10.380	10
146080	Plastic	Ylw	2.500	6.250	10
146081	Plastic	Ylw	2.500	10.250	10
13621	Plastic	Ylw	4.250	6.250	10
146078	Plastic	Ylw	4.250	10.250	10
146079	Plastic	Ylw	4.250	14.250	10
13622	Plastic	Org	4.250	6.250	10
13625	Plastic	Org	7.630	10.380	10
13628	Plastic	Org	10.250	14.250	10

Clear acrylic panels

Includes pressure sensitive adhesive backing to mount output behind the clear panel — protecting the graphics

Catalog #	Material	Color	Height (inch)	Length (inch)	Qty
13638	Acrylic	Clear	4.000	6.000	10
106464	Acrylic	Clear	4.250	10.250	10
13639	Acrylic	Clear	7.250	10.000	10
106463	Acrylic	Clear	7.250	10.250	10
13640	Acrylic	Clear	10.000	14.000	10
106465	Acrylic	Clear	10.25 in.	10.25 in.	10

BLS1255 Laminating System

BLS1255 laminator enables you to quickly and easily make custom rigid signs for your facility

- Mount signs to rigid panels to create signs for your facility
- Fast and easy to use
- No heat or electricity needed
- Laminate documents up to 12 in. wide

Catalog #	Description
105038	BLS1255 Laminating System
105041	12 in. x 50 ft. Double-Sided Polyester Overlamine



Laminates documents up to 12 in. wide

MiniMark™ Label Materials

BradyID.com/s36

MiniMark™
INDUSTRIAL LABEL PRINTER

The MiniMark printer has been discontinued, but Brady continues to manufacture and stock labels and ribbons for the printer.



Indoor / Outdoor Grade Vinyl (B-595)

- Conforms well to irregular, curved, rough and highly textured surfaces
- 8-10 year average outdoor durability in temperatures from -40° F to 180° F. Labels can be applied in temperatures from 0° F to 180° F
- Patent Number D481.414



Figure 33b



	0.500 in. x 100 ft. (12.7 mm x 30.48 m)	1.125 in. x 100 ft. (28.6 mm x 30.48 m)	2.250 in. x 100 ft. (57.2 mm x 30.48 m)	3.000 in. x 100 ft. (76.2 mm x 30.48 m)	4.000 in. x 100 ft. (101.6 mm x 30.48 m)	Rec. Ribbon
White	113186	113185	113184	113183	113182	103025
Yellow	113195	113194	113193	113192	113191	103025
Red	113199	113198	113197	—	113196	103026
Blue	113211	113210	113209	—	113208	103026
Green	113207	113206	113205	—	113204	103026
Black	113215	113214	113213	—	113212	103026
Brown	115762	115761	115760	—	115759	103026
Gold	—	115757	115756	—	115755	103025
Grey	115754	115753	113219	—	113218	103025
Purple	115752	115751	113217	—	113216	103026
Orange	113203	113202	113201	—	113200	103025
Clear	113190	113189	113188	—	113187	103025

General Purpose Indoor / Outdoor Vinyl (B-7569)

- Excellent for facility, safety, chemical and lean 5S labeling
- Five year average outdoor durability in temperatures from -40° F to 180° F. Labels can be applied in temperatures from 0° F to 180° F
- Patent Number D481.414



Figure 33b



	1.125 in. x 110 ft. (28.6 mm x 30.48 m)	2.250 in. x 110 ft. (57.2 mm x 30.48 m)	4.000 in. x 110 ft. (101.6 mm x 30.48 m)	Rec. Ribbon
White	120847	120854	120861	52042
Yellow	120848	120855	120862	52042
Red	120849	120856	120863	52042
Orange	120852	120859	120866	52042
Blue	120851	120858	120865	52044
Green	120850	120857	120864	52044
Black	120853	120860	120867	52044

Pre-Printed Header Stripe Supply for Arc Flash Labels and Signs (B-595)

- Pre-printed continuous stripe on top portion, then supply is cut-to-length according to length of text entered




Figure 71



Diagram	Catalog #	Material	Stripe Color	Label Height A Inch (mm)	Roll Length B Feet (m)	Stripe Width C Inch (mm)	Labels Per Roll	Rec. Ribbon
Fig. 71	113221	B-595	Red	4.000 (101.6)	100 (30.48)	1.000 (25.4)	1 roll (cont.)	103025
Fig. 71	113230	B-595	Red	2.250 (57.15)	100 (30.48)	0.500 (12.7)	1 roll (cont.)	103025
Fig. 71	113222	B-595	Orange	4.000 (101.6)	100 (30.48)	1.000 (25.4)	1 roll (cont.)	103025
Fig. 71	113227	B-595	Orange	3.000 (76.2)	100 (30.48)	0.750 (19.05)	1 roll (cont.)	103025
Fig. 71	113228	B-595	Orange	2.250 (57.15)	100 (30.48)	0.500 (12.7)	1 roll (cont.)	103025
Fig. 71	113220	B-595	Yellow	4.000 (101.6)	100 (30.48)	1.000 (25.4)	1 roll (cont.)	103025
Fig. 71	113226	B-595	Yellow	3.000 (76.2)	100 (30.48)	0.750 (19.05)	1 roll (cont.)	103025
Fig. 71	113229	B-595	Yellow	2.250 (57.15)	100 (30.48)	0.500 (12.7)	1 roll (cont.)	103025

Tamper-Evident Metallized Polyester (B-438)

- Permanent adhesive
- Tape destructs into tiny fragments when tampered with, making removal very tedious and difficult




Figure 29



Diagram	Catalog #	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 29	52148	B-438	Silver	2.000 (50.8)	1.000 (25.4)	1	1,240	103025
Fig. 29	52149	B-438	Silver	3.000 (76.2)	1.000 (25.4)	1	1,225	103025
Fig. 29	52150	B-438	Silver	3.000 (76.2)	2.000 (50.8)	1	650	103025
Fig. 29	52152	B-438	Silver	3.000 (76.2)	110 ft. (33.5 m)	-	1 roll (cont.)	103025



MiniMark Print Ribbons

Ribbons for B-595 and B-438 materials

Catalog #	Roll Size	Color	Rolls Per Pack
103026	4 in. x 290 ft.	White	2
103025	4 in. x 290 ft.	Black	2

Ribbons for B-7569 material

Catalog #	Roll Size	Color	Rolls Per Pack
52044	4.4 in. x 290 ft.	White	2
52042	4.4 in. x 290 ft.	Black	2
52045	4.4 in. x 290 ft.	Red	2
52059	4.4 in. x 290 ft.	Green	2
52047	4.4 in. x 290 ft.	Blue	2

GlobalMark® Label Materials

BradyID.com/s36

GLOBALMARK[®] 2

INDUSTRIAL LABEL MAKER

The GlobalMark printer has been discontinued, but Brady continues to manufacture and stock labels and accessories for the printer.



GlobalMark2 Printer Accessories

Catalog #	Description
120994	Rolling case w/ handle and supplies pockets for benchtop printers
STYLUS-3PK	Stylus Pens (3/pk)
64MB-CF	256MB Memory Card
76811	Replacement Cutting Blade
76737	Transfer Tape (4.25 in. x 300 ft.)
20596	Grommets for Tags (100/pk)
20591	Hole Punch for Tags
81762	7 in. Nylon Cable Ties (100/pk)

Pre-Printed Blank Sign Headers (B-595)

- Allows printer to create multicolor signs fast - in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME / ANSI Z535 standards
- Indoor / outdoor grade material conforms to rough, highly textured, and "difficult to adhere to" surfaces

Service temp: -40°F to 180°F; Application temp: 0°F to 180°F
Average Outdoor Durability: 8-10 years




Figure 73



Diagram	Catalog #	B#	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 73	121550	B-595		2.250 (57.2)	3.250 (82.6)	1	270	76739
Fig. 73	121558	B-595		4.000 (101.6)	6.250 (158.8)	1	165	76739
Fig. 73	121552	B-595		2.250 (57.2)	3.250 (82.6)	1	270	76739
Fig. 73	121560	B-595		4.000 (101.6)	6.250 (158.8)	1	165	76739
Fig. 73	121551	B-595		2.250 (57.2)	3.250 (82.6)	1	270	76739
Fig. 73	121559	B-595		4.000 (101.6)	6.250 (158.8)	1	165	76739
Fig. 73	121549	B-595		2.250 (57.2)	3.250 (82.6)	1	270	76739
Fig. 73	121557	B-595		4.000 (101.6)	6.250 (158.8)	1	165	76739
Fig. 73	121553	B-595		2.250 (57.2)	3.250 (82.6)	1	270	76739
Fig. 73	121561	B-595		4.000 (101.6)	6.250 (158.8)	1	165	76739
Fig. 73	121554	B-595		2.250 (57.2)	3.250 (82.6)	1	270	76739
Fig. 73	121562	B-595		4.000 (101.6)	6.250 (158.8)	1	165	76739
Fig. 73	121563	B-595		1.125 (28.6) *	2.750 (69.8)	1	300	76739
Fig. 73	121547	B-595		2.250 (57.2)	3.250 (82.6)	1	270	76739
Fig. 73	121564	B-595		2.250 (57.2) *	3.750 (95.2)	1	250	76739
Fig. 73	121555	B-595		4.000 (101.6)	6.250 (158.8)	1	165	76739
Fig. 73	121548	B-595		2.250 (57.2)	3.250 (82.6)	1	270	76739
Fig. 73	121556	B-595		4.000 (101.6)	6.250 (158.8)	1	165	76739

*Pre-sized to fit blank rigid valve tags below, but can also be used as general purpose label.



Blank Rigid Valve Tags

- Die-cut labels are sized to fit the recessed area on the tag
- Outdoor tag withstands temperatures -40° F to 180° F

Blank rigid valve tags

Catalog #	Color	Tag Size Inch	Recessed Area Inch
87696	White	2.1 x 3.6	1.5 x 3
87697	White	3.1 x 4.6	2.5 x 4
41922	Yellow	2.1 x 3.6	1.5 x 3
41923	Yellow	3.1 x 4.6	2.5 x 4
41924	Red	2.1 x 3.6	1.5 x 3
41925	Red	3.1 x 4.6	2.5 x 4
41926	Blue	2.1 x 3.6	1.5 x 3
41927	Blue	3.1 x 4.6	2.5 x 4
41928	Green	2.1 x 3.6	1.5 x 3
41929	Green	3.1 x 4.6	2.5 x 4
87694	Orange	2.1 x 3.6	1.5 x 3
87695	Orange	3.1 x 4.6	2.5 x 4

Catalog #	Color	Tag Size Inch	Recessed Area Inch
87712	Tan	2.1 x 3.6	1.5 x 3
87713	Tan	3.1 x 4.6	2.5 x 4
87710	Brown	2.1 x 3.6	1.5 x 3
87711	Brown	3.1 x 4.6	2.5 x 4
87698	Gray	2.1 x 3.6	1.5 x 3
87699	Gray	3.1 x 4.6	2.5 x 4
41920	Black	2.1 x 3.6	1.5 x 3
41921	Black	3.1 x 4.6	2.5 x 4
142133	Variety Pack*		

* Pack of 30 tags includes at least one of each size and color. Perfect for evaluating which sizes and colors you need.

Non-Adhesive and Pre-Cut Safety Tags (B-551)

- Non-adhesive semi rigid card stock with perforations between tags
 - Tags are pre-cut with hole and chamfered corners
 - Snap-in plastic grommets available for extra strength around mounting hole
- Service temp: -40°F to 193°F; Average Outdoor Durability: up to 2 years




Figure 69



Diagram	Catalog #	B#	Header	Tag Width A Inch (mm)	Tag Height B Inch (mm)	Tags Per Row	Tags Per Roll	Rec. Ribbon
Fig. 69	121543	B-551		3.250 (82.6)	5.750 (146.1)	1	100	76739
Fig. 69	121544	B-551		3.250 (82.6)	5.750 (146.1)	1	100	76739
Fig. 69	121545	B-551		3.250 (82.6)	5.750 (146.1)	1	100	76739
Fig. 69	121546	B-551		3.250 (82.6)	5.750 (146.1)	1	100	76739

Right-to-Know Labels (B-595)

- Outdoor grade vinyl adhesive label in Color Bar or NFPA 704M diamond formats
- 4-color diamond or bars are pre-printed so that labels only require 1-color print pass (black) through the printer



Catalog #	B#	Legend	Label Width Inch (mm)	Label Height Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
115763	B-595		4.000 (101.6)	6.250 (158.8)	1	170	96089
115766	B-595		2.250 (57.2)	4.000 (101.6)	1	240	96089
115772	B-595		2.250 (57.2)	2.250 (57.2)	1	365	96089
115765	B-595		4.000 (101.6)	4.000 (101.6)	1	240	96089
115773	B-595		2.250 (57.2)	2.250 (57.2)	1	365	96089
115764	B-595		4.000 (101.6)	6.250 (158.8)	1	170	96089
115767	B-595		2.250 (57.2)	4.000 (101.6)	1	240	96089
115771	B-595		2.250 (57.2)	2.250 (57.2)	1	365	96089
115768	B-595		2.250 (57.2)	2.250 (57.2)	1	365	96089
115770	B-595		1.125 (28.6)	3.000 (76.2)	1	300	96089
115769	B-595		1.125 (28.6)	3.000 (76.2)	1	300	96089

Overlamine for RTK Labels (B-674)

Protect your printed labels with a pressure sensitive polyester overlamine.

Catalog #	B#	Color	Label Width Inch (mm)	Label Height Inch (mm)	Labels Per Pkg
64984	B-674	Clear	1.500 (38.1)	2.500 (63.5)	50
58476	B-674	Clear	2.500 (63.5)	2.500 (63.5)	50
58706	B-674	Clear	3.500 (88.9)	5.500 (139.7)	50
64985	B-674	Clear	4.500 (114.3)	6.500 (165.1)	50

Indoor / Outdoor Grade Vinyl Tape (B-595)

- Conforms well to irregular, curved, rough and highly textured surfaces
- Low-shrink vinyl minimizes the amount of unsightly dust and grime buildup often found around the edges of other vinyl labeling supplies
- 8-10 year average outdoor durability in temperatures from -40° F to 180° F (-40° C to 82° C). Labels can be applied in temperatures from 0° F to 180° F



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	113109	B-595	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113110	B-595	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113111	B-595	White	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113112	B-595	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113113	B-595	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113114	B-595	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113115	B-595	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113116	B-595	Yellow	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113117	B-595	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113118	B-595	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113119	B-595	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113120	B-595	Red	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113121	B-595	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113122	B-595	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113127	B-595	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113128	B-595	Blue	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113129	B-595	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113130	B-595	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113123	B-595	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113124	B-595	Green	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113125	B-595	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113126	B-595	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113131	B-595	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113132	B-595	Black	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113133	B-595	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113134	B-595	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113135	B-595	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113136	B-595	Brown	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113137	B-595	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113138	B-595	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113139	B-595	Gold	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113140	B-595	Gold	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113141	B-595	Gold	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113142	B-595	Gold	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113143	B-595	Grey	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113144	B-595	Grey	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113145	B-595	Grey	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113146	B-595	Grey	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113147	B-595	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113148	B-595	Purple	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113149	B-595	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113150	B-595	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	113151	B-595	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113152	B-595	Orange	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113153	B-595	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113154	B-595	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113105	B-595	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113106	B-595	Clear	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113107	B-595	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	113108	B-595	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739

Polyester Tape (B-569)

- Continuous outdoor grade polyester
- Best choice for marking stainless steel pipes and surfaces (low halide content)
- Ultra-smooth finish excellent for mounting to rigid panels and very smooth surfaces
- Applies best to very smooth surfaces



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig.33	76614	B-569	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76615	B-569	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76616	B-569	White	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76617	B-569	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76618	B-569	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76619	B-569	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76620	B-569	Yellow	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76621	B-569	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76622	B-569	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76623	B-569	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76624	B-569	Red	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76625	B-569	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76626	B-569	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76627	B-569	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76628	B-569	Blue	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76629	B-569	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76630	B-569	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76639	B-569	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76640	B-569	Green	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76641	B-569	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76642	B-569	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76647	B-569	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76648	B-569	Black	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76649	B-569	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76650	B-569	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76643	B-569	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76644	B-569	Brown	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76645	B-569	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76646	B-569	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76602	B-569	Tan	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76603	B-569	Tan	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76604	B-569	Tan	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76651	B-569	Grey	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76652	B-569	Grey	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76653	B-569	Grey	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76654	B-569	Grey	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76631	B-569	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76632	B-569	Purple	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76633	B-569	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76634	B-569	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76635	B-569	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76636	B-569	Orange	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76637	B-569	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76638	B-569	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76598	B-569	Pink	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76599	B-569	Pink	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76600	B-569	Pink	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76601	B-569	Pink	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76606	B-569	Lt. Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76607	B-569	Lt. Blue	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76608	B-569	Lt. Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig.33	76609	B-569	Lt. Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76741
Fig.33	97738	B-569	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	97739	B-569	Ochre	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	97740	B-569	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	97741	B-569	Ochre	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig.33	97742	B-569	Sky Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	97743	B-569	Sky Blue	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	97744	B-569	Sky Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	97745	B-569	Sky Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76610	B-569	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76611	B-569	Clear	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76612	B-569	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig.33	76613	B-569	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739

ToughStripe® Print-On-Demand Floor Labels (B-483)

- Revolutionary B-483 material has ultra aggressive adhesive
- Withstands forklift and pallet jack traffic without tearing or lifting
- Easy 3-step process: print label, position on floor, apply overlamine
- Each roll ships with a roll of clear overlamine which must be applied over printed label and onto appropriate surface for best performance
- Plotter-cutting shapes and text not allowed with this material



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	142155	B-483	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142154	B-483	White	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142156	B-483	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142157	B-483	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142162	B-483	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142161	B-483	Yellow	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142163	B-483	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142164	B-483	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142166	B-483	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142165	B-483	Red	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142167	B-483	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142169	B-483	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142168	B-483	Blue	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142170	B-483	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142172	B-483	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142171	B-483	Green	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142173	B-483	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142159	B-483	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142158	B-483	Black	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142160	B-483	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76741
Fig. 33	142175	B-483	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142174	B-483	Orange	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	142176	B-483	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739

Phosphorescent Tape (B-526)

- Permanent adhesive and glows in darkness for 10 hours
- Glows brighter and longer than B-582
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26
- Plotter-cutting shapes and text not allowed with this material



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	105909	B-526	Phosphorescent	4.000 (101.6)	50 (15.2)	1 roll (cont.)	76739, 76743
Fig. 33	105910	B-526	Phosphorescent	2.250 (57.2)	50 (15.2)	1 roll (cont.)	76739, 76743
Fig. 33	105911	B-526	Phosphorescent	1.125 (28.6)	50 (15.2)	1 roll (cont.)	76739, 76743

Phosphorescent Tape (B-582)

- Permanent adhesive and glows in darkness for hours
- Meets ISO, and ASTM standards
- Plotter-cutting shapes and text not allowed with this material



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	76711	B-582	Phosphorescent	4.000 (101.6)	50 (15.2)	1 roll (cont.)	76739, 76743
Fig. 33	76712	B-582	Phosphorescent	2.250 (57.2)	50 (15.2)	1 roll (cont.)	76739, 76743
Fig. 33	76713	B-582	Phosphorescent	1.125 (28.6)	50 (15.2)	1 roll (cont.)	76739, 76743

ToughWash® Tape (B-854, B-855)

- Withstands pressures of high heat, harsh chemicals and numerous washdown cycles
- B-854 offers metal detectable layer to detect foreign debris in food stream
- Ideal for use in the Food and Beverage industry
- Plotter-cutting shapes and text not allowed with this material




Diagram	Catalog #	B#	Legend	Label Width A Inch (mm)	Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
B-854 ToughWash Metal Detectable Material							
Fig. 33	133134	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	134352
Fig. 33	133133	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	134352
Fig. 73	133141	B-854		4.000 (101.06)	6.250 (158.8)	100	134352
Fig. 73	133140	B-854		4.000 (101.06)	6.250 (158.8)	100	134352
Fig. 73	139812	B-854		4.000 (101.06)	6.250 (158.8)	100	134352
Fig. 73	133139	B-854		4.000 (101.06)	6.250 (158.8)	100	134352
B-855 ToughWash Material							
Fig. 33	133159	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	134352
Fig. 33	133158	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	134352
Fig. 73	133166	B-855		4.000 (101.06)	6.250 (158.8)	100	134352
Fig. 73	133165	B-855		4.000 (101.06)	6.250 (158.8)	100	134352
Fig. 73	139811	B-855		4.000 (101.06)	6.250 (158.8)	100	134352
Fig. 73	133164	B-855		4.000 (101.06)	6.250 (158.8)	100	134352

Reflective Tape (B-584)

- Permanent adhesive / outdoor grade
- Shines back at viewer brightly when light shines on label
- Plotter-cutting shapes and text not allowed with this material

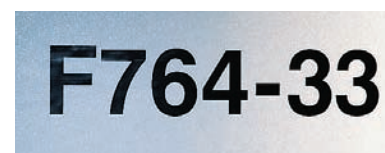


Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	76705	B-584	Silver	4.000 (101.6)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	76706	B-584	Silver	2.250 (57.2)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	76707	B-584	Silver	1.125 (28.6)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	96060	B-584	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	96061	B-584	Yellow	2.250 (57.2)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	96062	B-584	Yellow	1.125 (28.6)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	99219	B-584	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	99220	B-584	Orange	2.250 (57.2)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	99221	B-584	Orange	1.125 (28.6)	50 (15.2)	1 roll (cont.)	76739

Tag Stock Material (B-551)

- Non-adhesive tag stock meets OSHA 50 lb. pull requirement
- Grommets and hole punch available
- Plotter-cutting shapes and text not allowed with this material



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	76714	B-551	White	4.250 (107.9)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	76715	B-551	White	3.250 (82.5)	50 (15.2)	1 roll (cont.)	76739
Fig. 33	76716	B-551	White	2.500 (63.5)	50 (15.2)	1 roll (cont.)	76739

Repositionable Vinyl Tape (B-581)

- Special adhesive allows you to easily remove the label and re-apply
- Ideal for indoor marking where frequent repositioning is required
- Plotter-cutting shapes and text not allowed with this material



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	76697	B-581	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76698	B-581	White	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76699	B-581	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76700	B-581	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76701	B-581	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76702	B-581	Yellow	2.250 (57.2)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76703	B-581	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76704	B-581	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	76739

Magnetic Tape (B-509)

- Non-adhesive
- Print directly onto magnetic material
- Plotter-cutting shapes and text not allowed with this material



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	76686	B-509	White	4.000 (101.6)	25 (7.62)	1 roll (cont.)	76739
Fig. 33	76687	B-509	White	2.500 (63.5)	25 (7.62)	1 roll (cont.)	76739
Fig. 33	76688	B-509	Yellow	4.000 (101.6)	25 (7.62)	1 roll (cont.)	76739
Fig. 33	76689	B-509	Yellow	2.500 (63.5)	25 (7.62)	1 roll (cont.)	76739

Cold Temperature Tape (B-549)

- Permanently adheres to surfaces at temperatures as low as -10°F
- Great for use in any cold storage warehouse, cooler or freezer
- Plotter-cutting shapes and text not allowed with this material



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	76691	B-549	White	4.250 (107.9)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76692	B-549	White	2.500 (63.5)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76693	B-549	White	1.375 (34.9)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76694	B-549	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76695	B-549	Yellow	2.500 (63.5)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76696	B-549	Yellow	1.375 (34.9)	100 (30.5)	1 roll (cont.)	76739

Metallized Polyester Tape (B-565)

- Permanent adhesive
- Non-cuttable supply suitable for continuous-style labels
- Cuttable supply ideal for multi-up, cut labels in basic rectangular and round shapes only. Not suitable for cut-out text or intricate shapes.



Figure 33



Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 33	76720	B-565	Non-cuttable Metallized	4.250 (107.9)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76721	B-565	Non-cuttable Metallized	2.500 (63.5)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	76722	B-565	Non-cuttable Metallized	1.375 (34.9)	100 (30.5)	1 roll (cont.)	76739
Fig. 33	114533	B-565	Cuttable Metallized	4.250 (107.9)	100 (30.5)	1 roll (cont.)	76739

Transfer Tape For Cut Text

- Leaves cut characters pre-spaced for transferring from liner to the desired surface

Diagram	Catalog #	Label Width A Inch (mm)	Roll Length B Feet (m)
Fig. 33	76737	4.250 (107.9)	300 ft. (91.44 m)



Example of a
Single Color Ribbon

Examples of
Multi-Color Paneled Ribbons

GlobalMark2 Industrial Print Ribbons

- Super-tough smear-proof ribbons assure your printed text lasts for years outdoors and in an industrial environment
- Ribbons ship self-contained in cartridges that drop straight in the printer with a click
- No calibrating, threading, wasted feeding, hassles and the ink will always be facing the right direction
- 2- and 4-color paneled ribbons are used to print labels and signs containing more than 1 print color
- Patent D481,755

Single Color Print Ribbons

Catalog #	Color	Size Inch (mm)	Length
76739	Black	4.110 (104.4)	200 (60.9)
134352	Black (for use with B-854 and B-855 ToughWash® material only)	4.110 (104.4)	200 (60.9)
96089	Black (for use with RTK labels)	4.110 (104.4)	200 (60.9)
76741	White	4.110 (104.4)	200 (60.9)
76743	Red	4.110 (104.4)	200 (60.9)
76745	Blue	4.110 (104.4)	200 (60.9)
76747	Green	4.110 (104.4)	200 (60.9)
76749	Magenta	4.110 (104.4)	200 (60.9)
76751	Yellow	4.110 (104.4)	200 (60.9)
76752	Orange	4.110 (104.4)	200 (60.9)
76759	Process Cyan	4.110 (104.4)	200 (60.9)
76760	Process Yellow	4.110 (104.4)	200 (60.9)
76761	Process Magenta	4.110 (104.4)	200 (60.9)

Two Color Print Ribbons

Catalog #	Color	Size Inch (mm)	Length
Panels: 4.110 x 8.000 (104.4 x 203.2 mm) Typical yield: 100 labels (8 in.) from 8 in. paneled ribbon			
76739	Black	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
76763	Black and Red	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
110220	Red and Green	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
76775	Black and Blue	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
76767	Black and Yellow	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
76771	Black and Orange	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
76779	Black and Green	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
Panels: 4.110 x 16.000 (104.4 x 406.4 mm) Typical yield: 60 labels (16 in.) from 16 in. paneled ribbon			
76762	Black and Red	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)
76774	Black and Blue	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)
76766	Black and Yellow	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)
76770	Black and Orange	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)
76778	Black and Green	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)
76782	Red and Blue	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)

Four Color Print Ribbons

Catalog #	Color	Size Inch (mm)	Length
Panels: 4.110 x 8.000 (104.4 x 203.2 mm) Typical yield: 50 labels (8 in.) from 8 in. paneled ribbon			
76787	Black, Red, Blue and Green	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
110221	Red, Green, Yellow and Black	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
76791	Black, Red, Blue and Yellow	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
76795	Cyan, Magenta, Yellow and Black	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
51447	Black, Red, Orange and Blue	4.110 x 8.000 (104.4 x 203.2 mm) panels	200 (60.9)
Panels: 4.110 x 16.000 (104.4 x 406.4 mm) Typical yield: 30 labels (16 in.) from 16 in. paneled ribbon			
76786	Black, Red, Blue and Green	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)
76790	Black, Red, Blue and Yellow	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)
76794	Cyan, Magenta, Yellow and Black	4.110 x 16.000 (104.4 x 406.4 mm) panels	200 (60.9)

Labelizer® Plus and VersaPrinter™ Supplies

BradyID.com/s36

The Labelizer PLUS and VersaPrinter have been discontinued, but for a limited time Brady will continue to stock labels for these printers.



Labelizer® Plus Industrial Labeling System



VersaPrinter™ Label and Sign Maker

Indoor / Outdoor Vinyl Tape with Ribbon (B-595)

- Conforms well to irregular, curved or rough surfaces
- Ideal for general purpose industrial uses – stands up to grease, oil and most industrial chemicals

8-10 year average outdoor durability in temperatures from 180° F to -40° F (82° C to -40° C).
Can be applied as low as 0° F (-18° C)



Catalog #	B#	Ribbon and Tape Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Tape Cartridges Per Pkg. (Ribbon included in cartridge)
142760	B-595	Black on Clear	0.500 (12.7)	90 (27.4)	2
142759	B-595	Black on Clear	1.125 (28.6)	90 (27.4)	2
142758	B-595	Black on Clear	2.250 (57.2)	90 (27.4)	1
142757	B-595	Black on Clear	4.000 (101.6)	90 (27.4)	1
142762	B-595	White on Clear	2.250 (57.2)	90 (27.4)	1
142765	B-595	Black on Green	1.125 (28.6)	90 (27.4)	2
142764	B-595	Black on Green	2.250 (57.2)	90 (27.4)	1
142763	B-595	Black on Green	4.000 (101.6)	90 (27.4)	1
142750	B-595	Black on Yellow	0.500 (12.7)	90 (27.4)	2
142749	B-595	Black on Yellow	1.125 (28.6)	90 (27.4)	2
142748	B-595	Black on Yellow	2.250 (57.2)	90 (27.4)	1
142747	B-595	Black on Yellow	3.000 (76.2)	90 (27.4)	1
142746	B-595	Black on Yellow	4.000 (101.6)	90 (27.4)	1
142769	B-595	White on Green	0.500 (12.7)	90 (27.4)	2
142768	B-595	White on Green	1.125 (28.6)	90 (27.4)	2
142767	B-595	White on Green	2.250 (57.2)	90 (27.4)	1
142766	B-595	White on Green	4.000 (101.6)	90 (27.4)	1
142777	B-595	White on Blue	0.500 (12.7)	90 (27.4)	2
142776	B-595	White on Blue	1.125 (28.6)	90 (27.4)	2
142775	B-595	White on Blue	2.250 (57.2)	90 (27.4)	1
142774	B-595	White on Blue	4.000 (101.6)	90 (27.4)	1
142772	B-595	White on Red	0.500 (12.7)	90 (27.4)	2
142773	B-595	White on Red	1.125 (28.6)	90 (27.4)	2
142771	B-595	White on Red	2.250 (57.2)	90 (27.4)	1
142770	B-595	White on Red	4.000 (101.6)	90 (27.4)	1
142756	B-595	Black on Orange	0.500 (12.7)	90 (27.4)	2
142755	B-595	Black on Orange	1.125 (28.6)	90 (27.4)	2
142754	B-595	Black on Orange	2.250 (57.2)	90 (27.4)	1
142753	B-595	Black on Orange	4.000 (101.6)	90 (27.4)	1
142785	B-595	Black on Gray	0.500 (12.7)	90 (27.4)	2
142784	B-595	Black on Gray	1.125 (28.6)	90 (27.4)	2
142783	B-595	Black on Gray	2.250 (57.2)	90 (27.4)	1
142782	B-595	Black on Gray	4.000 (101.6)	90 (27.4)	1
142793	B-595	White on Brown	1.125 (28.6)	90 (27.4)	2
142792	B-595	White on Brown	2.250 (57.2)	90 (27.4)	1
142791	B-595	White on Brown	4.000 (101.6)	90 (27.4)	1
142787	B-595	White on Tan	1.125 (28.6)	90 (27.4)	2
142786	B-595	White on Tan	2.250 (57.2)	90 (27.4)	1
142790	B-595	White on Magenta	1.125 (28.6)	90 (27.4)	2
142789	B-595	White on Magenta	2.250 (57.2)	90 (27.4)	1
142788	B-595	White on Magenta	4.000 (101.6)	90 (27.4)	1
142781	B-595	White on Black	0.500 (12.7)	90 (27.4)	2
142780	B-595	White on Black	1.125 (28.6)	90 (27.4)	2
142779	B-595	White on Black	2.250 (57.2)	90 (27.4)	1
142778	B-595	White on Black	4.000 (101.6)	90 (27.4)	1

Low-Halide Polyester Tape (B-569)

- Specially designed with a low halide content – best choice for use on stainless steel and nickel piping and other smooth surfaces
- 8-10 year average outdoor durability in temperatures from 180° F to -40° F (82° C to -40° C) and can be applied as low as 0° F (-18° C)



Catalog #	B#	Ribbon and Tape Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Tape Cartridges Per Pkg. (Ribbon included in cartridge)
64347	B-569	Black on Clear	1.125 (28.6)	110 (33.5)	2
64348	B-569	Black on Clear	2.250 (57.2)	110 (33.5)	1
64349	B-569	Black on Clear	4.000 (101.6)	110 (33.5)	1
64331	B-569	White on Green	1.125 (28.6)	110 (33.5)	2
64332	B-569	White on Green	2.250 (57.2)	110 (33.5)	1
64333	B-569	White on Green	4.000 (101.6)	110 (33.5)	1
64335	B-569	White on Blue	1.125 (28.6)	110 (33.5)	2
64336	B-569	White on Blue	2.250 (57.2)	110 (33.5)	1
64339	B-569	White on Red	1.125 (28.6)	110 (33.5)	2
64340	B-569	White on Red	2.250 (57.2)	110 (33.5)	1
64355	B-569	Black on White	1.125 (28.6)	110 (33.5)	2
64356	B-569	Black on White	2.250 (57.2)	110 (33.5)	1
64357	B-569	Black on White	4.000 (101.6)	110 (33.5)	1

Reflective Tape (B-584)

- Reflective capabilities are ideal for reading labels in low light areas both indoors and out



Catalog #	B#	Ribbon and Tape Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Tape Cartridges Per Pkg. (Ribbon included in cartridge)
64739	B-584	Black on White	1.125 (28.6)	75 (22.8)	2
64740	B-584	Black on White	2.250 (57.2)	75 (22.8)	1
64741	B-584	Black on White	4.000 (101.6)	75 (22.8)	1
64401	B-584	Black on Orange	2.250 (57.2)	58 (17.7)	1
64402	B-584	Black on Orange	4.000 (101.6)	75 (22.8)	1
64403	B-584	Black on Yellow	1.125 (28.6)	69 (21.0)	2
64404	B-584	Black on Yellow	2.250 (57.2)	58 (17.7)	1
64405	B-584	Black on Yellow	4.000 (101.6)	75 (22.8)	1

Overlaminates (B-674)

- Hand apply overlaminate after label is applied for improved label durability



Catalog #	B#	Ribbon and Tape Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Cartridges Per Pkg.
25966	B-674	Clear	0.750 (19.05)	30 (9.1)	1
25967	B-674	Clear	1.375 (34.9)	30 (9.1)	1
25968	B-674	Clear	2.500 (63.5)	30 (9.1)	1
25969	B-674	Clear	4.250 (107.9)	30 (9.1)	1

Repositionable Vinyl Tape (B-581)

- Special adhesive allows easy removal of label with reapplication again and again
- Ideal for indoor use where frequent repositioning is required, such as storage shelves



Catalog #	B#	Ribbon and Tape Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Tape Cartridges Per Pkg. (Ribbon included in cartridge)
64731	B-581	Black on White	1.125 (28.6)	90 (27.4)	2
64732	B-581	Black on White	2.250 (57.2)	90 (27.4)	1
64733	B-581	Black on White	4.000 (101.6)	90 (27.4)	1
64735	B-581	Black on Yellow	1.125 (28.6)	90 (27.4)	2
64736	B-581	Black on Yellow	2.250 (57.2)	90 (27.4)	1
64737	B-581	Black on Yellow	4.000 (101.6)	90 (27.4)	1

There's more online at

BradyID.com/s36

Design-Your-Own Padlock Online new

Create a custom SafeKey padlock with the options you need, including engraving, in one easy-to-use online tool.

Design-Your-Own Signs Online

Custom signs in no time! Quickly design, proof and order your custom safety signs with this convenient online tool.



We identify and protect premises, products and people.

For more information or to learn more about our innovative
products, visit BradyID.com or call 1-888-272-3946.



Y4824855 MS4824855

© 2019 Brady Worldwide Inc. ALL RIGHTS RESERVED

USA
Customer Service: 1-888-272-3946
Inside Sales: 1-888-311-0775
BradyID.com

Canada
Customer Service: 1-800-263-6179
BradyCanada.ca

Mexico
Customer Service: 1-800-262-7777
Inside Sales: 1-800-262-7777 ext 177
BradyLatinAmerica.com

